




STICK-LINE-DIM

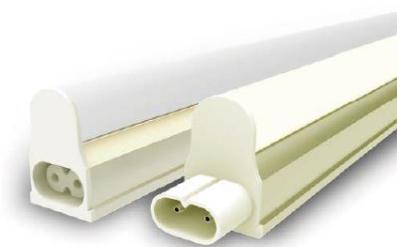


## Product specification

**INTERIOR LED LINEAR LIGHT**

Installation Wall mounted

Cut out -

Dimension L=295mm W=24.5mm H=36mm

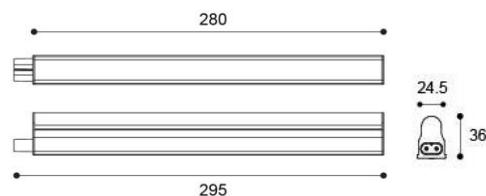**Technical description**

Article number 1610.003A-DIM

LED Consumption 5W

Current -

CCT 3000K 4000K

Lumen <sup>\*1</sup> 355lm 365lmØsystem<sup>\*3</sup> - -

Voltage 100-240Vac

Reflector 120°

CRI 80+

Driver Built-in, I/P : 100-240VAC 50/60 HZ

O/P : 100mA

**Technical character**

Insulation CLASS II

Protection IP 20

Tilt -

Rotate -

Operating temperature -20~40 °C

Average Failure Time L70(6k) &gt;36000 (h)

**Materials**Luminaire aluminum extruded  
plastic end cap, PC diffuser

Reflector -

Heat sink aluminum extruded

Color available anodized aluminum

**Package**

inner box mm 1 kg

outer box mm 0 kg / 0 in 1

**Photometric****Accessories**

VDE Plug cords 180cm, VDE Connection cords 25/50cm

UL Plug cords 180cm, UL Connection cords 25/50cm

Clip &amp; Screws

**Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,

this is the real lumen with the loss because of different design of reflectors and fixtures.

