



Apollo-III

Provide more output than standard T5 LED fixture with stronger mechanism for better heat dissipation. suitable to use in walkway, corridor or indirect lighting purpose.

Installation : ceiling and wall mounted.

Insulation : Class II, 230V AC.

Protection : IP20

Approval : CE



APOLLO-III

Product specification

Luminaire : aluminum extruded


Diffuser : Anti-UV plastic-PC

Driver : PF>0.9 , THD<20%

CCT range : 3 step MacAdam

Energy efficiency : >80 lm/W

Max. connection : 250W

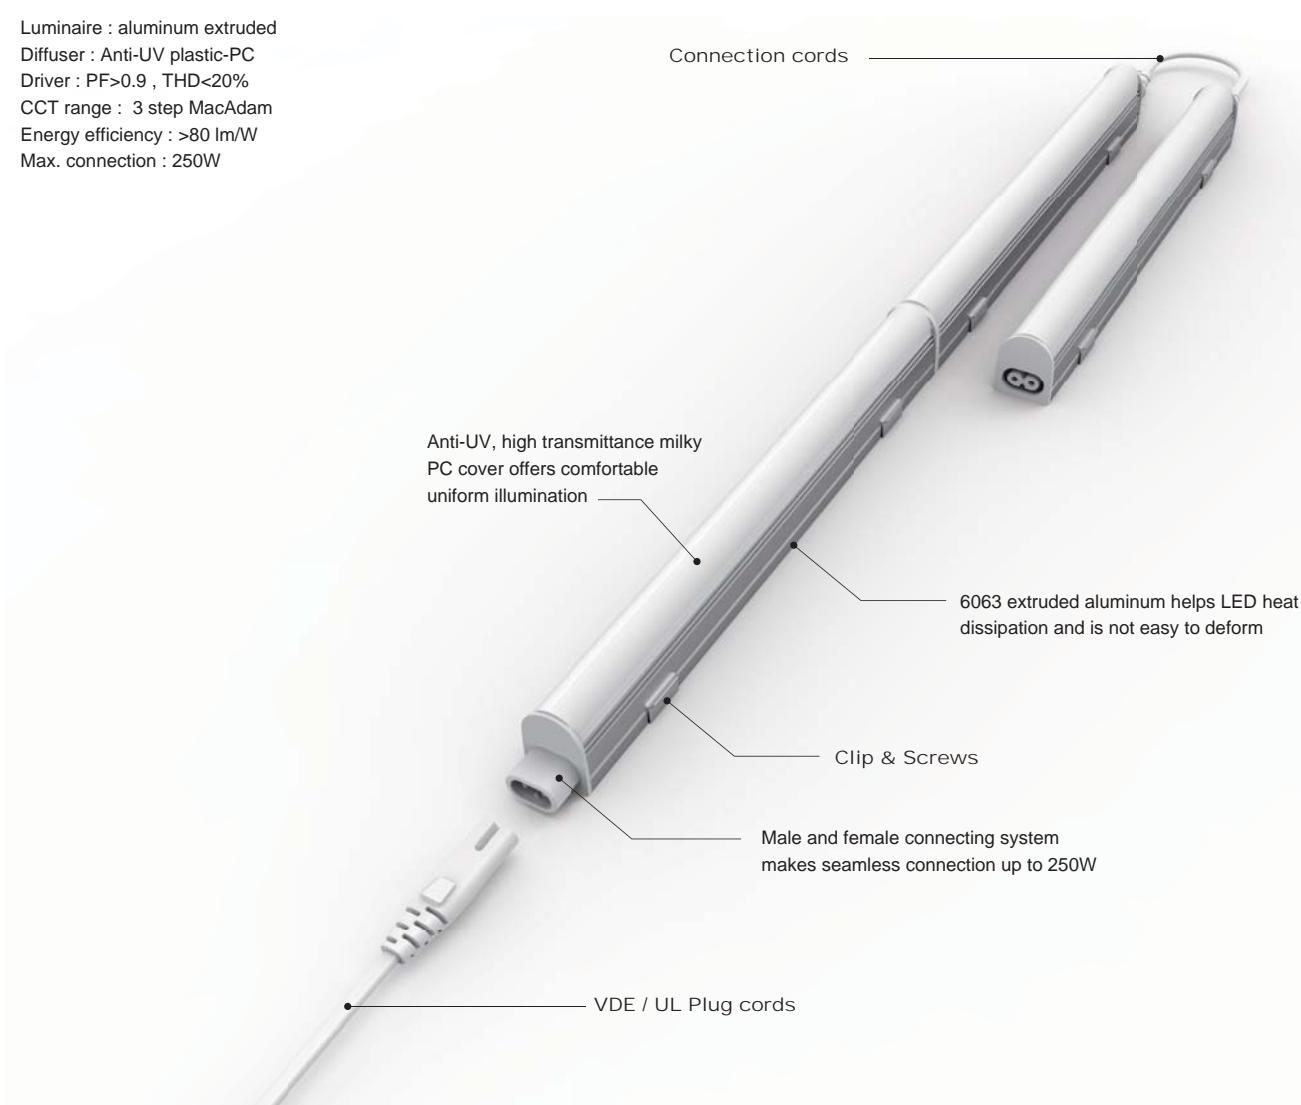

Colours Anodized Alum.



VDE Plug cords
EP-14-200 Length:200cm



VDE Connection cords
CSE-14-25 Length:25cm
CSE-14-50 Length:50cm



Clip & Screws
NS-0479




UL Plug cords
AP-14-200 Length:200cm




UL Connection cords
CSA-14-25 Length:25cm
CSA-14-50 Length:50cm



V-Clip & Screws
NS-0386

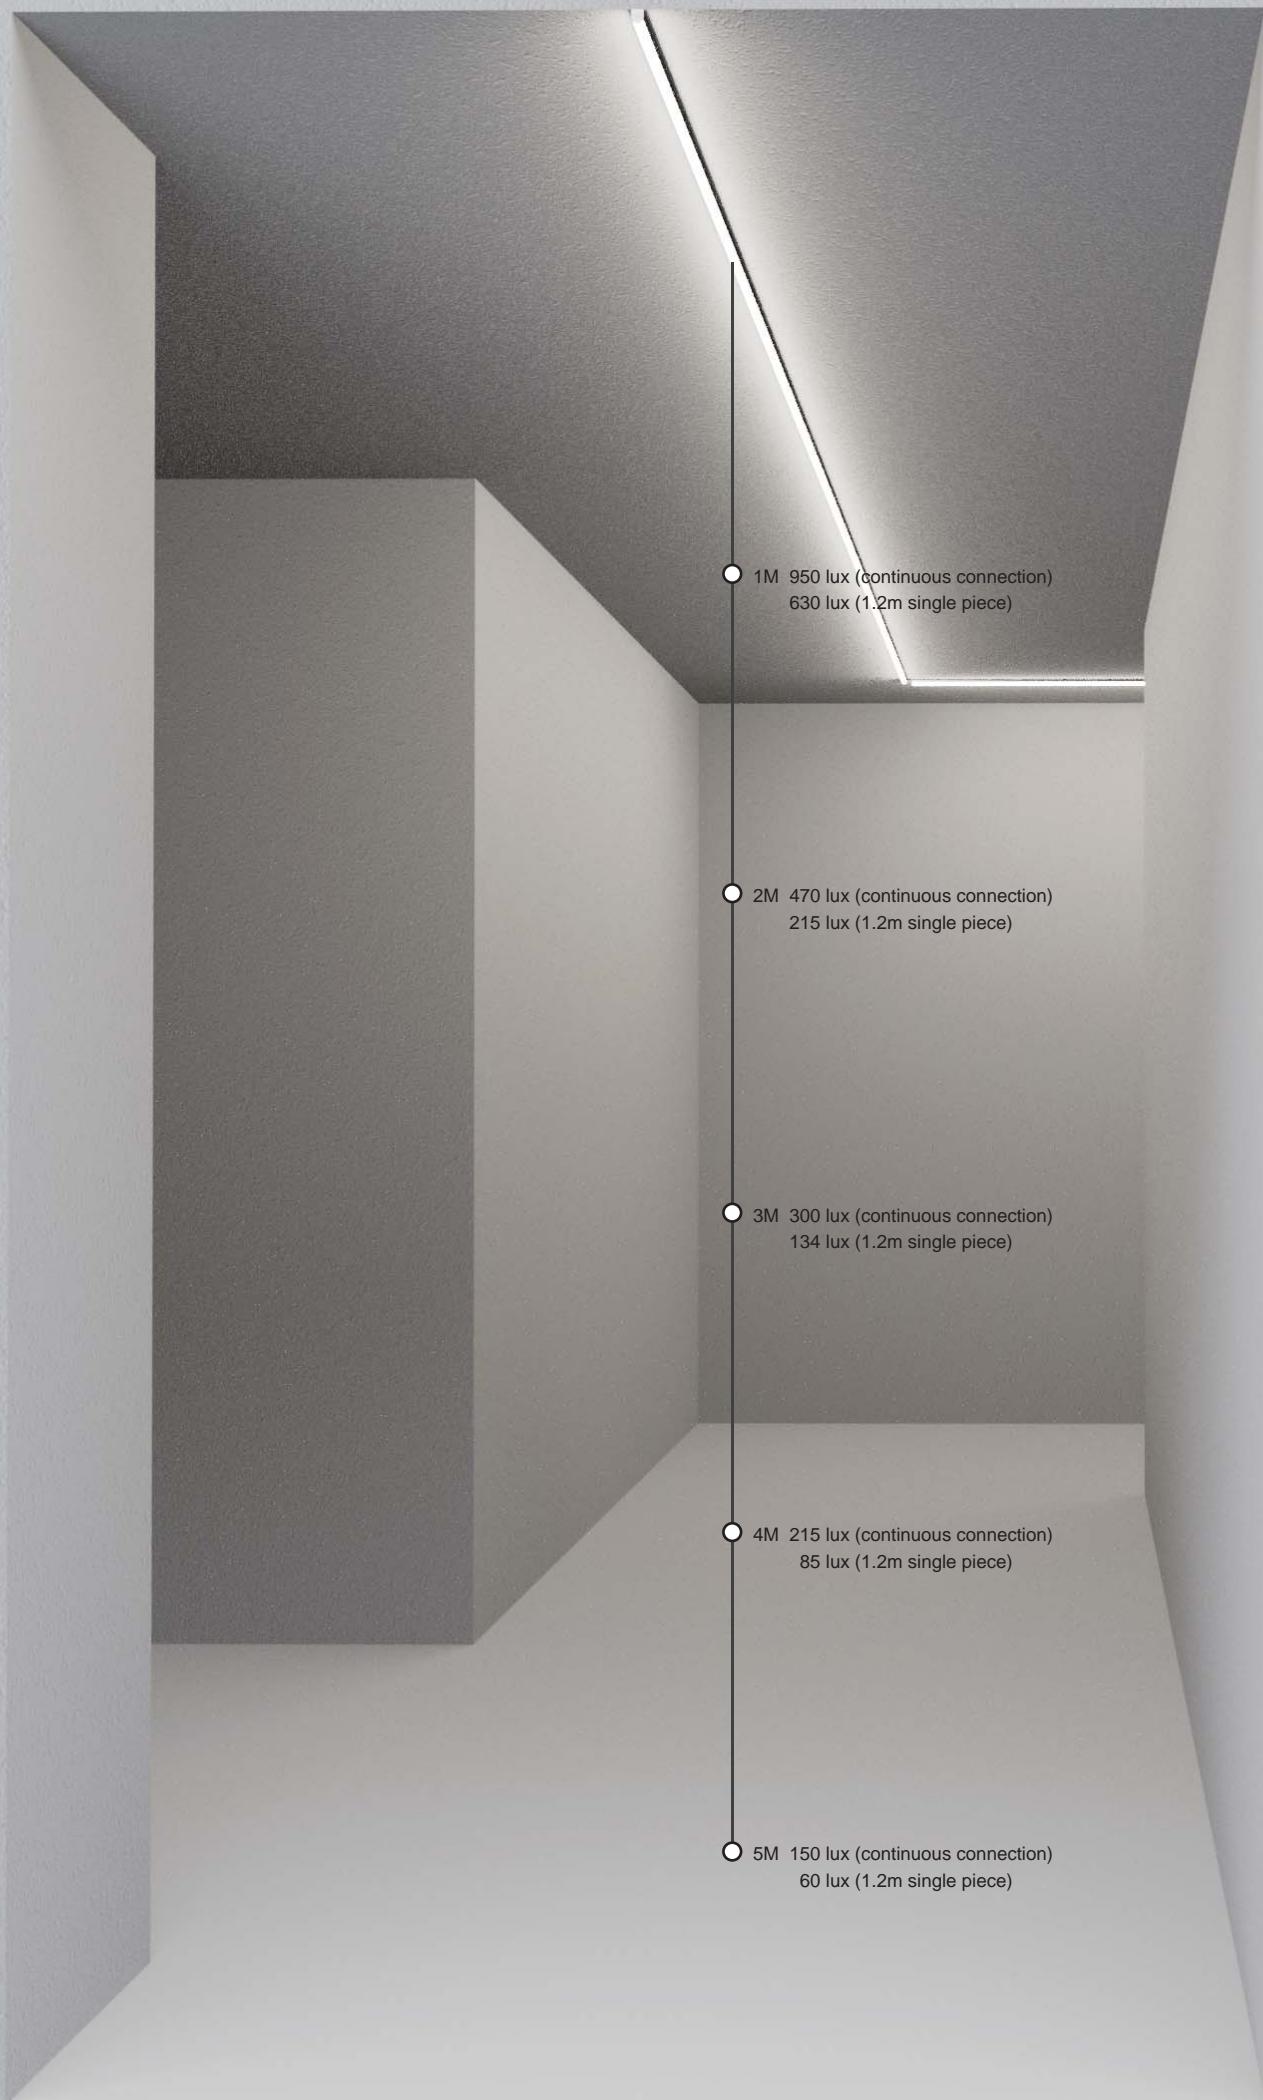

APOLLO-R-DIMMER-III

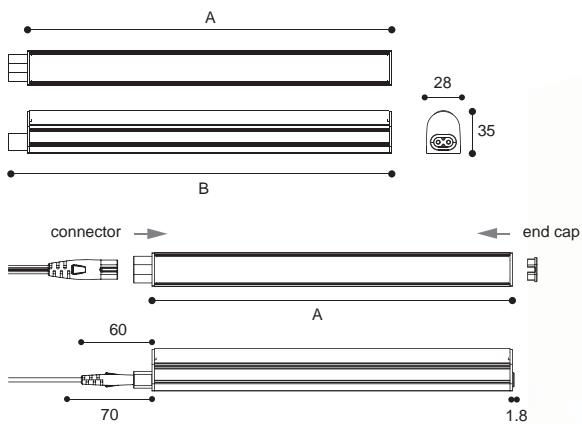

Wattage	A(mm)	B(mm)
7W	300	315
14W	600	615
21W	900	915
28W	1200	1215

Dimmable

brightness	1%	100%

Product features

Smooth and soft dimming: Using RISE dimming technology to dim without flicker and noise.

Dimming with branded dimmer in the market to adjust the intensity of light, dim low during daytime or sleeping.


Dimming range from 1%~100% for various needs.

Suitable for households, shops and indirect lighting.


Colours Anodized Alum.

Article Number	LED Consumption	Voltage	Lumen	LED Type	LED q'ty	CCT/CRI
1510.015.3BTB	7W	230V AC	500 (lm)	SMD	39	30/80+
1510.015.3DTB	7W	230V AC	550 (lm)	SMD	39	40/80+
1510.015A.3BTB	14W	230V AC	1050 (lm)	SMD	65	30/80+
1510.015A.3DTB	14W	230V AC	1155 (lm)	SMD	65	40/80+
1510.015B.3BTB	21W	230V AC	1600 (lm)	SMD	104	30/80+
1510.015B.3DTB	21W	230V AC	1760 (lm)	SMD	104	40/80+
1510.015C.3BTB	28W	230V AC	2300 (lm)	SMD	143	30/80+
1510.015C.3DTB	28W	230V AC	2530 (lm)	SMD	143	40/80+



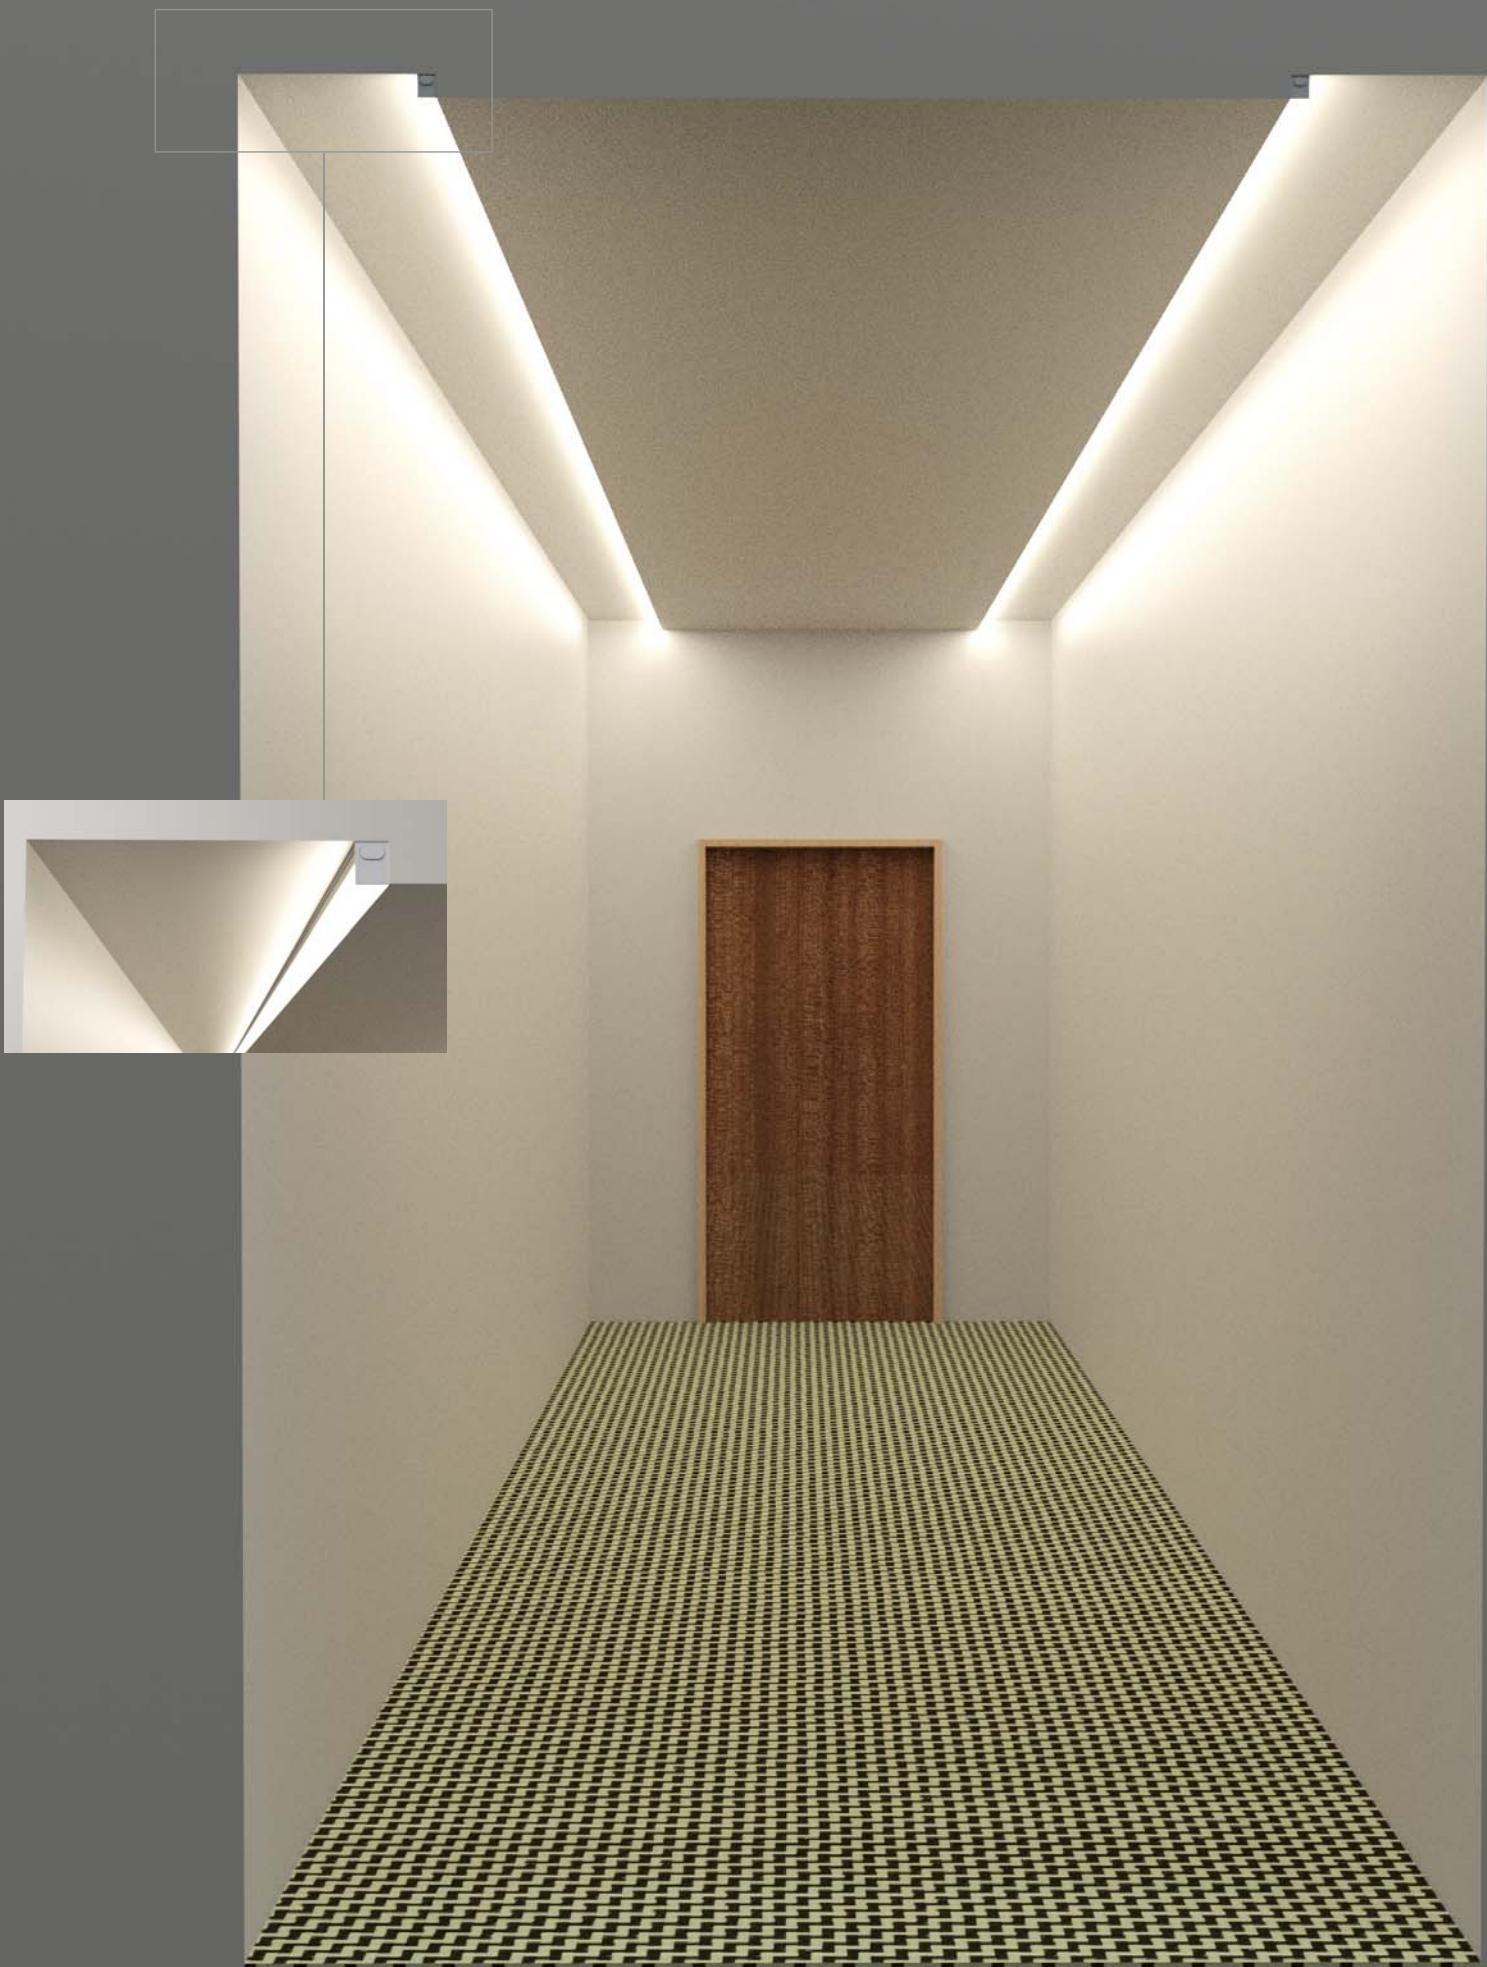

APOLLO-S-DIMMER-III

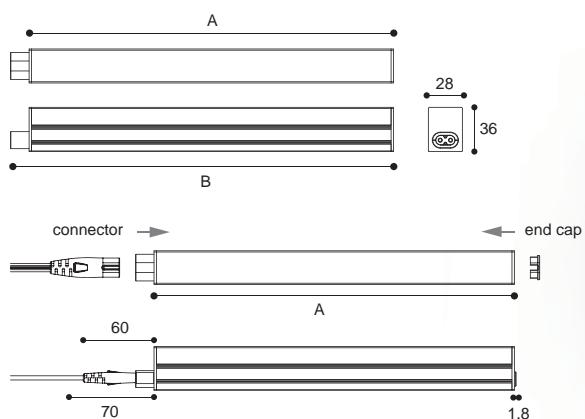

Wattage	A(mm)	B(mm)
7W	300	315
14W	600	615
21W	900	915
28W	1200	1215

Dimmable



Product features

Smooth and soft dimming: Using RISE dimming technology to dim without flicker and noise.

Dimming with branded dimmer in the market to adjust the intensity of light, dim low during daytime or sleeping.

Dimming range from 1%~100% for various needs.

Suitable for households, shops and indirect lighting.

Colours 
Anodized Alum.

Article Number	LED Consumption	Voltage	Lumen	LED Type	LED q'ty	CCT/CRI
1510.016.3BTB	7W	230V AC	450 (lm)	SMD	39	30/80+
1510.016.3DTB	7W	230V AC	495 (lm)	SMD	39	40/80+
1510.016A.3BTB	14W	230V AC	945 (lm)	SMD	65	30/80+
1510.016A.3DTB	14W	230V AC	1040 (lm)	SMD	65	40/80+
1510.016B.3BTB	21W	230V AC	1440 (lm)	SMD	104	30/80+
1510.016B.3DTB	21W	230V AC	1580 (lm)	SMD	104	40/80+
1510.016C.3BTB	28W	230V AC	2070 (lm)	SMD	143	30/80+
1510.016C.3DTB	28W	230V AC	2270 (lm)	SMD	143	40/80+

