



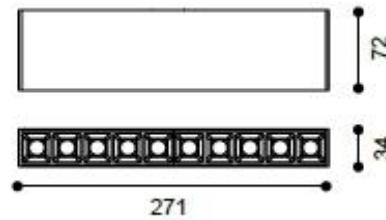
KANO



## Product specification

**INTERIOR TRACK LIGHT**

**Installation** Track light  
**Cut out** -  
**Dimension** 271x34x H=72mm

**Technical description**

<b>Article number</b>	1814.301-10
<b>LED Consumption</b>	2.2W x10
<b>Current</b>	700mA
<b>CCT</b>	3000K
<b>Lumen <sup>*1</sup></b>	200lm x10
<b>Øsystem <sup>*3</sup></b>	-
<b>Voltage</b>	-
<b>Reflector</b>	15°/30°/40°
<b>CRI</b>	90+
<b>Driver</b>	Remoted, I/P : 90-264V 50/60HZ O/P : 9-24V 700mA Max16w

**Technical character**

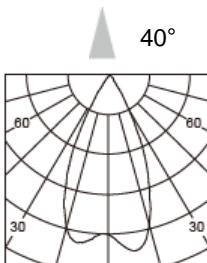
<b>Insulation</b>	CLASS I
<b>Protection</b>	IP 20
<b>Tilt</b>	-
<b>Rotate</b>	-
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(6k) >36000 (h)

**Materials**

<b>Luminaire</b>	steel
<b>Reflector</b>	pc
<b>Heat sink</b>	extruded aluminum
<b>Color available-Bezel</b>	white
<b>Color available-Baffle</b>	black/white/piano black

**Package**

<b>inner box</b>	mm 1 kg
<b>outer box</b>	mm 0 kg / 0 in 1

**Photometric****Accessories**

None

**Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

