



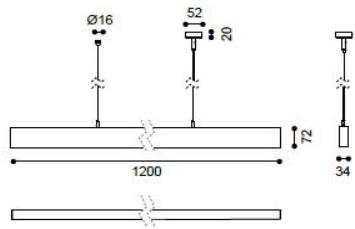
KANO



Product specification

INTERIOR SURFACE MOUNTED CEILING LIGHT

Installation Pendent Light
Cut out -
Dimension 1200mm x 34mm x H=72mm

**Technical description**

Article number	1916.101
LED Consumption	23.4W
Current	650mA
CCT	3000K
Lumen ^{*1}	1035 lm
Øsystem ^{*3}	-
Voltage	-
Reflector	120°
CRI	90+
Driver	

Technical character

Insulation	CLASS III
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	extruded aluminum
Reflector	optic lens
Heat sink	extruded aluminum
Color available	white / black

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Photometric**Accessories**

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

