




V-Buster



Product specification

INTERIOR PANEL LIGHTS

- a. Recessed mode (Light-steel-frame)
- b. Recessed mode (visible profile ceiling)
- c. Pendant mode
- d. Surface Mounted (ceiling) mode

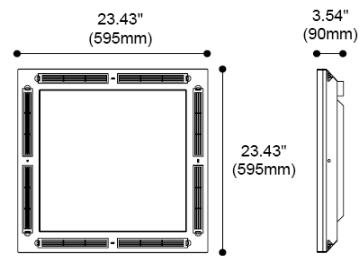

Technical Specification

Article number	2018.135		
Fixture Consumption(without Driver)	50W		
Current / Voltage	2.1A / 24V		
CRI	80+		
CCT	3000K	4000K	5000K
Delivered Lumen	2900lm	3000lm	3100lm
Beam Angle available	80°		

Driver Technical Specification (Remoted)

Driver Brand	MEAN WELL	Driver Model	LPF-60-24
Input voltage / Freqency range	90-305Vac / 50/60Hz	Output Current / Voltage	24Vdc / 60W
Dimming / Flicker	No / Free	Certification	UL/cUL/TUV/CE-EN
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Front frame	plastic-PP V0
Insulation	CLASS II	Back frame	plastic-PP V0
Protection	IP20	Color available-Body	white
Operating Humidity	25~80%(RH Non-condensing)		
Operating temperature	0~35°C		
STORAGE TEMP., HUMIDITY	-40 ~ +75°C, 10 ~ 90% RH		
Signal reception distance	>3 meters		
Average Failure Time	L70(6k) >36000 (h)		

Accessories

ST-VB-1
Surface mounted frameACOT-6
Pendant KitST-VB-2
Recessed frame

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.