



GIMBAL

Material: Aluminum forging heatsink with anodized black finish, aluminum die casting trim with powder coating finish.


GIMAL series – is the indoor recessed light with a diversification of size and wattage available. It is able to tilt 0°~30° and rotate 0°~355°. It's a good choice no matter for main or accent illumination.







Article number	1418.131
LED Consumption	62W
Current	1750 (mA)
Lumen	7553 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable

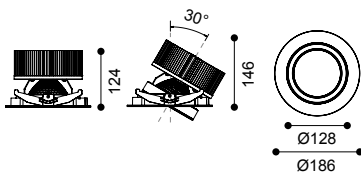


Article number	1218.134
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+



Article number 1218.134

LED Consumption	51W
Current	1400 (mA)
Lumen	5393 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable


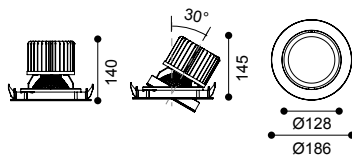




Article number	1318.131
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable

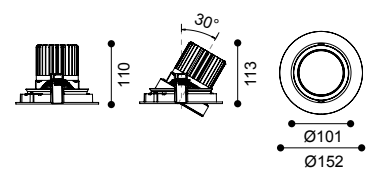

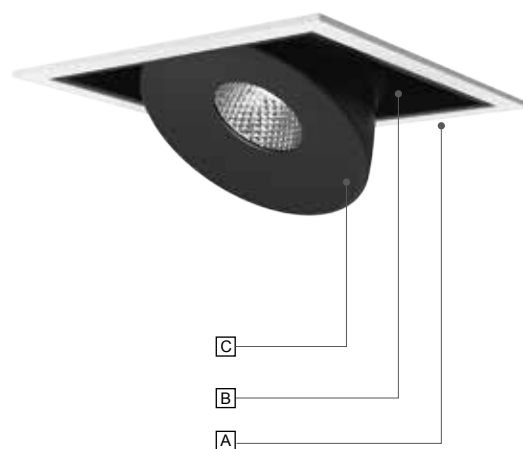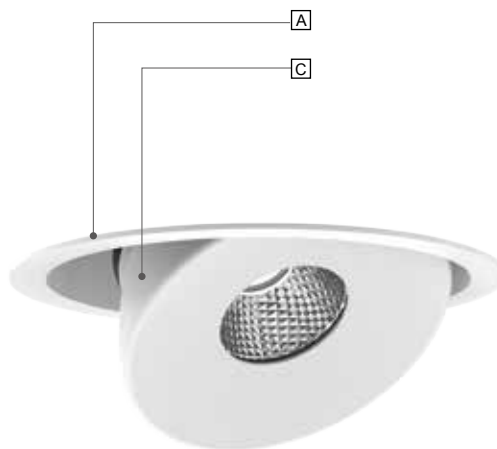

Color available - A / B / C

● Black ○ White


FANTASIA

All-rounded illumination
Simple, small housing with up to 35 degrees tilt angle
Suitable for residential & commercial application.






Article number	1818.138
LED Consumption	10W
Current	250 (mA)
Lumen	758 (lm)
Beam Angle	40°/50°/65°/80°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
65°		
1.0	1.26	746
2.0	2.52	186
3.0	3.79	82
4.0	5.05	46
5.0	6.32	29






Article number	1818.168
LED Consumption	10W
Current	250 (mA)
Lumen	758 (lm)
Beam Angle	40°/50°/65°/80°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h (m)	D (m)	E (lx)
65°		
1.0	1.26	746
2.0	2.52	186
3.0	3.79	82
4.0	5.05	46
5.0	6.32	29