



WALLED


Material: Aluminum forging heatsink with anodized black finish, aluminum die casting trim & baffle with powder coating finish. The extra-thin trim make it smooth to the ceiling just feel like trimless, easy installation perfectly suitable for commercial space.






Article number	1018.141
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable


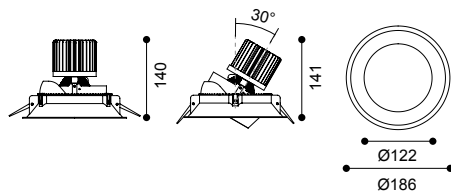


Article number	1018.137
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

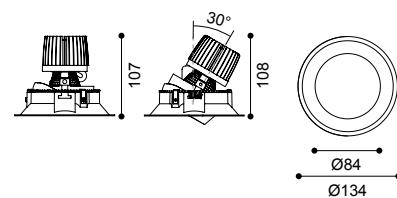





Article number	1018.149
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable


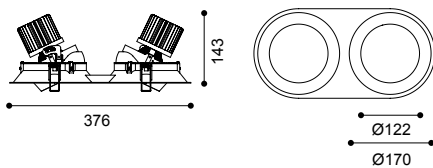


Article number	1018.145
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

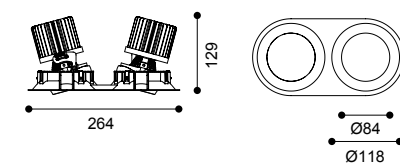




Article number	1018.139
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable


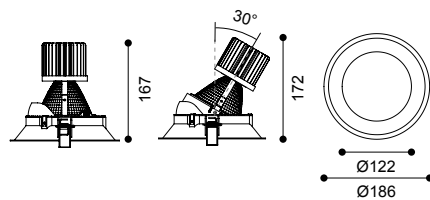


Article number	1018.135
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

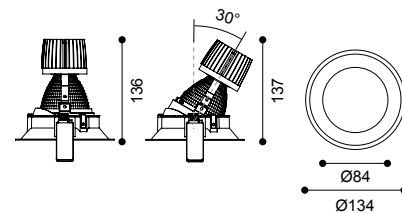





Article number	1018.147
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

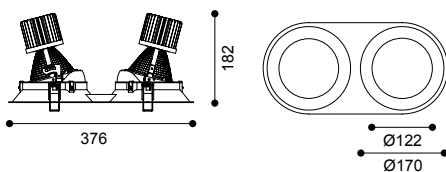

Article number	1018.143
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable

