




HADES

Multiple function design with different wattages and light engines to choose. With glare-free, high performance to fulfill the applications required by designers, a good alternatives for retrofit use and for all new design. The mix up of different types of fitting allow the designers to create and achieve what they want.

HADES series can be sold in complete set or separate parts for different types of clients. It is suitable for both commercial and residential applications.



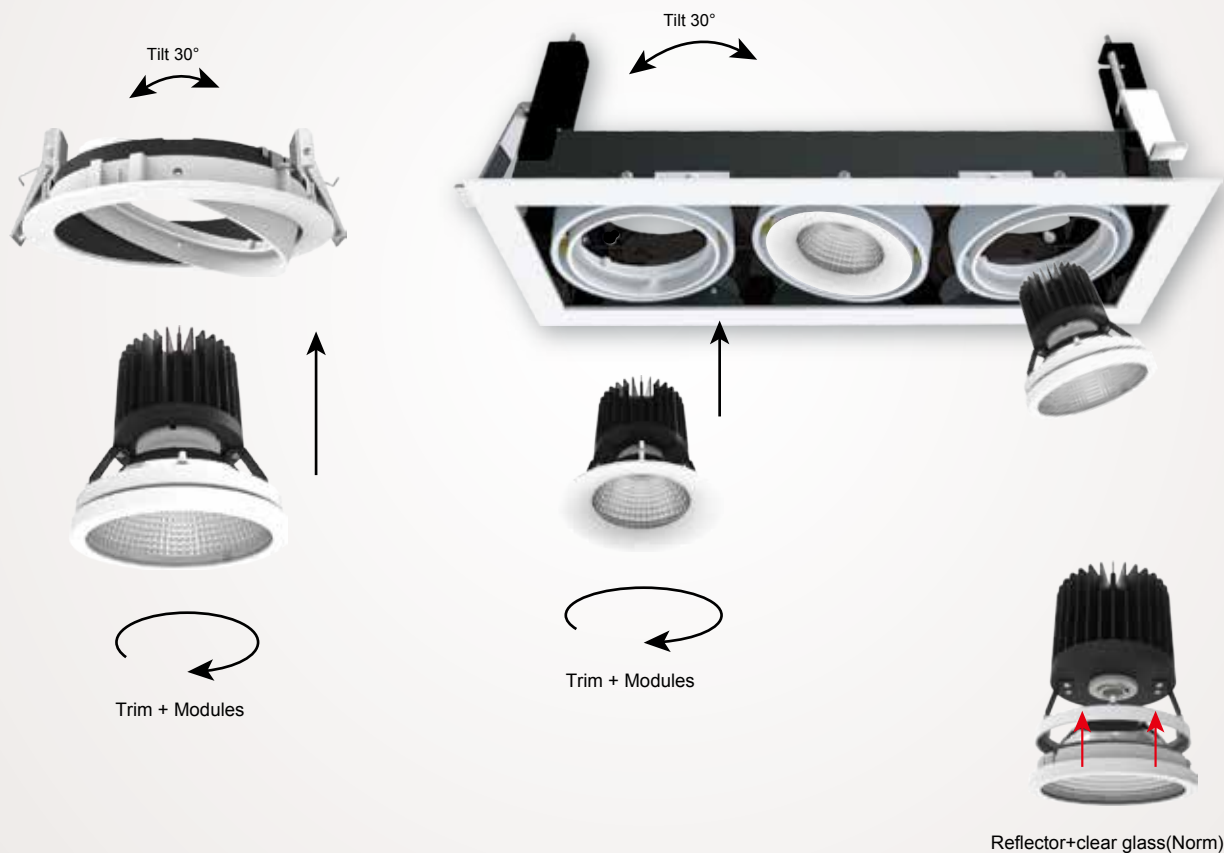

Module Options-TB,TLB (Max 42W)

Module Options-TS,TLS (Max 15W)



Multi-trims
HADES-II



Low glare
HADES-BF



Low glare
HADES-SF

Accessories



Reflector+
Honeycomb
louver

Reflector+
Snoot

Reflector+
Striped glass

H9-1

S9-1

SG9-1

Light Engine



Deep glare
20°/40°

High efficiency
20°

BS

BH

Light Engine



Deep glare
20°/40°

High efficiency
20°/40°

Focus
20°/40°

Honeycomb
louver
20°/40°

SS

SH

SH-E

SH-H






Article number	1514.432-1
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1514.424-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h(m)	D(m)	E(lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass






Article number	1514.432-2
LED Consumption	39.1W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver




SG9-1
Reflector+
Striped glass







Article number	1514.424-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h (m)	D (m)	E (lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
reflector+snoot



H9-1
reflector+
honeycomb louver



SG9-1
reflector+
striped glass





Article number	1514.432-3
LED Consumption	39.1W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1514.424-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h(m)	D(m)	E(lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass

Accessories



S9-1
reflector+snoot



H9-1
reflector+
honeycomb louver



SG9-1
reflector+
striped glass






Article number	1514.433-1
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



Accessories



S9-1
Reflector+snout



H9-1
Reflector+
Honeycomb louver




SG9-1
Reflector+
Striped glass







Article number	1514.427-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h (m)	D (m)	E (lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snout



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass





Article number	1514.433-2
LED Consumption	39.1W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable






Article number	1514.427-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h(m)	D(m)	E(lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver



SG9-1
Reflector+
Striped glass





Article number	1514.433-3
LED Consumption	39.1W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver




SG9-1
Reflector+
Striped glass






Article number	1514.427-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h(m)	D(m)	E(lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snoot



H9-1
Reflector+
Honeycomb louver




SG9-1
Reflector+
Striped glass






Article number	1414.438-1
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1414.418-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h(m)	D(m)	E(lx)
30°		
1.0	0.50	8877
2.0	1.00	2219
3.0	1.50	986
4.0	2.01	554
5.0	2.51	355







Article number	1414.432-1
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h(m)	D(m)	E(lx)
40°		
1.0	0.69	4886
2.0	1.39	1222
3.0	2.09	542
4.0	2.79	305
5.0	3.49	195





Article number	1414.438-2
LED Consumption	39.1W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1414.418-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

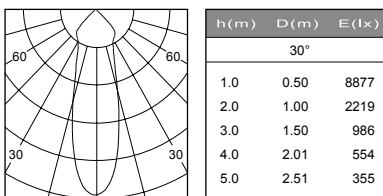





Article number	1414.432-2
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

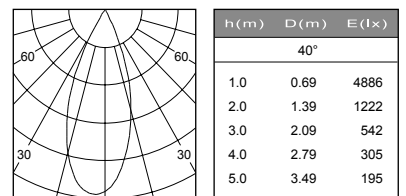





Article number	1414.438-3
LED Consumption	39.1W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1414.418-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

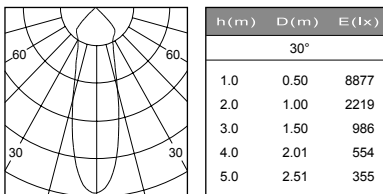




Article number	1414.432-3
LED Consumption	12.8W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

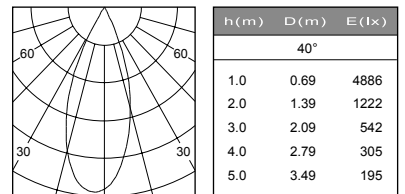






Article number	1414.453-1
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1414.419-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	30°	
1.0	0.47	5325
2.0	0.95	1331
3.0	1.42	591
4.0	1.90	332
5.0	2.38	213







Article number	1414.433-1
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	40°	
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86





Article number	1414.453-2
LED Consumption	39.1W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1414.419-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

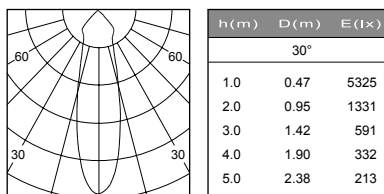




Article number	1414.433-2
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable

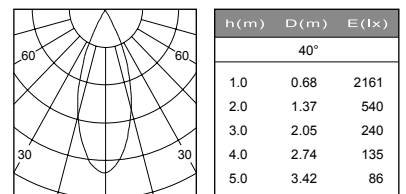





Article number	1414.453-3
LED Consumption	39.1W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1414.419-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h(m)	D(m)	E(lx)
	30°	
1.0	0.47	5325
2.0	0.95	1331
3.0	1.42	591
4.0	1.90	332
5.0	2.38	213






Article number	1414.433-3
LED Consumption	12.8W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h(m)	D(m)	E(lx)
	40°	
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86




Article number	1418.130
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Article number	1418.150
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h (m)	D (m)	E (lx)
30°		
1.0	0.47	5325
2.0	0.95	1331
3.0	1.42	591
4.0	1.90	332
5.0	2.38	213




Article number	1518.139
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/24°/40°
CCT	3000K
CRI	90+

Article number	1518.140
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	12°/24°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



h (m)	D (m)	E (lx)
40°		
1.0	0.76	3862
2.0	1.52	965
3.0	2.29	429
4.0	3.05	241
5.0	3.81	154

Accessories



S9-1
Reflector+snoot

H9-1
Reflector+
Honeycomb louver

SG9-1
Reflector+
Striped glass





Article number	1418.107
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours   
Black White Grey



Dimmable



h (m)	D (m)	E (lx)
40°		
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86