



AMIGO

AMIGO series is a recessed downlight for easy changing of light engine, safe and simple installation without damaging the ceiling.

It can also reduce the glare from the reflector and provide comfortable light for eyes (UGR<19).

With fixed and tiltable light engines, different fitting sizes and light sources, trim and trimless recessed frame, it provides a maximum flexibility to create a variety of styles.

Material: Aluminum forging heatsink with anodized black finish, aluminum die casting & steel trim with powder coating finish, aluminum die casting baffle with powder coating finish.




AMIGO series can be sold in complete set or separate parts for different types of clients. It is suitable for both commercial and residential applications.




Assembling diagram:


A




B

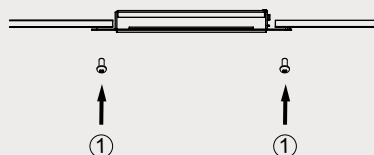


C



D



E





Module Options-TB,TLB

Module Options-TM,TLM



Wall washer
AMIGO-BW



Wall washer
AMIGO-MW



Light engine

Light engine



Fixed (Half-deep)
20°/40°

BF



Fixed (deep)
20°/40°

BS



Wall washer

QR111



Fixed
10°/15°/24°/38°
IP44

MF



Fixed
IP44

MR16-F




Wall washer

MR16-W




Article number	1514.401-0
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable





Article number	1514.401-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable







Article number	1514.401-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable






Article number	1514.401-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable






Article number	1514.400-0
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable





Article number	1514.400-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable







Article number	1514.400-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable





Article number	1514.400-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1514.405-0
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable





Article number	1514.405-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1514.405-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable





Article number	1514.405-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1514.404-0
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable






Article number	1514.404-1
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1514.404-2
LED Consumption	25.5W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable





Article number	1514.404-3
LED Consumption	25.5W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	20°/40°
CCT	3000K
CRI	90+

Colours  
Black White




Dimmable







Article number	1514.421-0
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103






Article number	1514.421-1
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103






Article number	1514.421-2
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103






Article number	1514.421-3
LED Consumption	12.8W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103







Article number	1514.420-0
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103







Article number	1514.420-1
LED Consumption	12.8W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h (m)	D (m)	E (lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103






Article number	1514.420-2
LED Consumption	12.8W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable




h(m)	D(m)	E(lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103






Article number	1514.420-3
LED Consumption	12.8W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	10°/15°/24°/38°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable





h(m)	D(m)	E(lx)
	38°	
1.0	0.68	2593
2.0	1.36	648
3.0	2.05	288
4.0	2.73	162
5.0	3.42	103





Article number	1478.104S
Lamp	MR-11
Lampholder	GU4
Wattage	20W
Voltage	12 (V AC)

Colours  
Black White

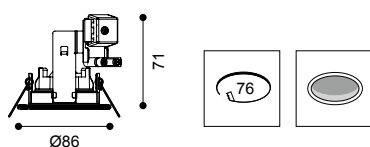



Article number	1478.105S
Lamp	MR-11
Lampholder	GU4
Wattage	20W
Voltage	12 (V AC)

Colours  
Black White

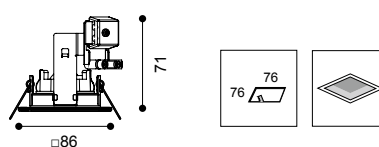

Article number	1378.204S
Lamp	MR-11
Lampholder	GU4
Wattage	20W
Voltage	12 (V AC)

Colours  
Black White

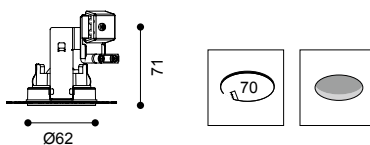

Article number	1378.205S
Lamp	MR-11
Lampholder	GU4
Wattage	20W
Voltage	12 (V AC)

Colours  
Black White

