

BROWNIE 26 (EU)

system



BROWNIE 26


Creativity in linear style

BROWNIE-26 is our 48V magnetic track lighting system. It features a modular design that supports a variety of configurations, including linear LED modules and spotlights. The track can be surface-mounted, suspended, or recessed to suit different installation needs.

BROWNIE 26

TRACK

BW26 09~12



BW26-48-TS
Surface



BW26-48-TSH
Surface/ Pendant



BW26-48-TLH
Recessed Trimless

MODULES

Spot light Spot A

BW26 13~28



BW26-48-SA-HE-40
Ø40 / 8W



BW26-48-SA-HE-50
Ø50 / 11W



BW26-48-SA-HE-64
Ø64 / 15W



BW26-48-SA-HE-90
Ø90 / 24W

Spot light Spot B

BW26 13~28



BW26-48-SB-40
Ø40 / 8W



BW26-48-SB-50
Ø50 / 11W



BW26-48-SB-64
Ø64 / 14W



BW26-48-SB-90
Ø90 / 24W



BW26-48-SBZ-40
Ø40 / 8W
Zoomable



BW26-48-SBZ-50
Ø50 / 11W
Zoomable



BW26-48-SBZ-64
Ø64 / 14W
Zoomable



BW26-48-SBZ-90
Ø90 / 24W
Zoomable



BW26-48-SBF-50
Ø50 / 11W
Framing



BW26-48-SBF-64
Ø64 / 14W
Framing

Panel light
BW26 29~30



BW26-48-P-A
6W



BW26-48-P-B
9W



BW26-48-P-C
12W

Accent light
BW26 29~30



BW26-48-KD-12
10W



BW26-48-KD-24
15W

Pendant light
BW26 31~34



BW26-48-CT-28
Ø28 / 7W



BW26-48-CT-40
Ø40 / 8W



BW26-48-CT-64
Ø64 / 15W



BW26-48-CA
Ø100 / 15W




BW26-48-CMO-200
Ø200 / 9W




BW26-48-CMO-400
Ø400 / 20W

BROWNIE 26

Micro track system

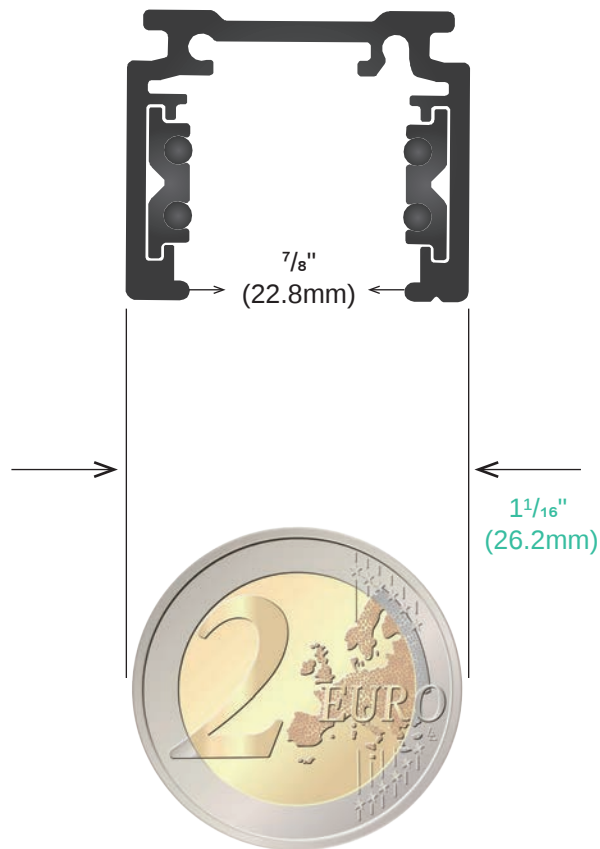

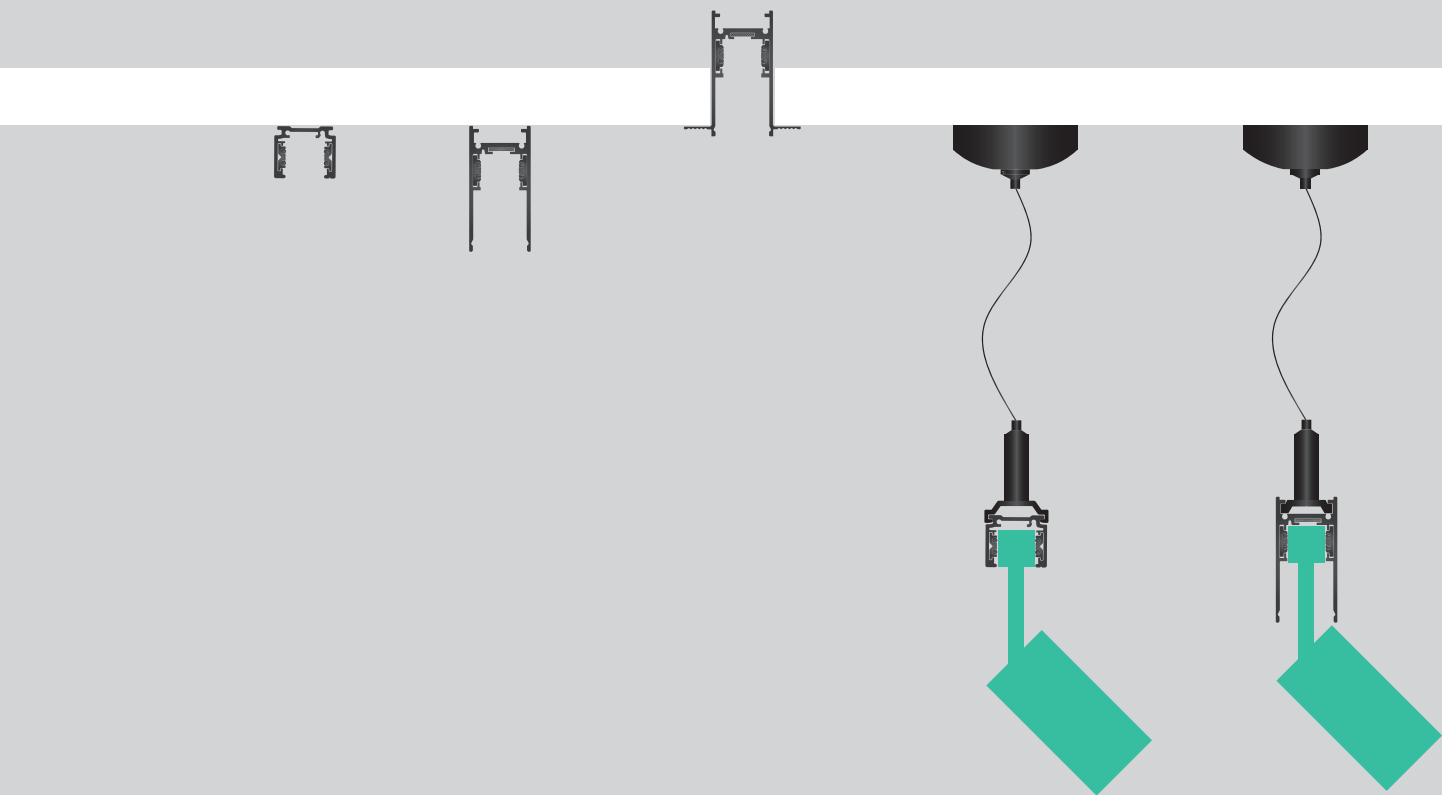

BROWNIE 26

This linear connection system offers flexible installation options, including trimless recessed, surface-mounted, and pendant-mounted configurations, making it suitable for a wide range of interior spaces.

The LED modules feature a clean, linear design, with each series offering unique functionalities—making lighting design easier and more efficient than ever.






BROWNIE 26

BROWNIE 26

Surface Mounted




Article number	L (mm)
BW26-48-TS-1000	39.37" (1000mm)
BW26-48-TS-2000	78.74" (2000mm)

Colour Black ■ White □

Track accessories

BW26-48-TS-RH
Horizontal corner
for BW26-48-TS track



BW26-48-TS-RV
Vertical corner
for BW26-48-TS track



BNC-37A
End cap



BNC-37B
End cap with wire exit




BNI-23
Pendant Kit



BROWNIE 26

Surface Mounted / Pendant Track




Article number	L (mm)
BW26-48-TSH-1000	39.37" (1000mm)
BW26-48-TSH-2000	78.74" (2000mm)

Colour Black ■ White □

Track accessories


BW26-48-TSH-RH

Horizontal corner
for BW26-48-TSH track



BW26-48-TSH-RV

Vertical corner
for BW26-48-TSH track



BNC-36A

End cap



BNC-36B

End cap with wire exit




BNI-22

Pendant Kit



BROWNIE 26

Recessed Trimless




Article number	L (mm)
BW26-48-TLH-1000	39.37" (1000mm)
BW26-48-TLH-2000	78.74" (2000mm)

Colour Black ■ White □

Track accessories



BW26-48-TLH-RH

Horizontal corner
for BW26-48-TLH track



BW26-48-TLH-RV

Vertical corner
for BW26-48-TLH track



BNC-36A

End cap



BNC-36B

End cap with wire exit



BROWNIE 26 Track System Accessories

CIRCUIT JOINT		
	Article number	TYPE
	BNC-31	Power joint
	Article number	TYPE
	BNC-34	Circuit joint (short)
	Article number	TYPE
	BNC-35	Circuit joint (long)
	Article number	TYPE
	BNC-33	L Circuit joint
	Article number	TYPE
	BNC-32	I Circuit joint



BROWNIE 26

Spot lighting



Ø40



Ø50



Ø64




Ø90

Spot A



Spot B

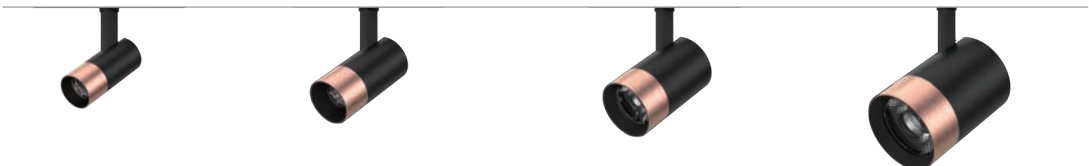

Spot B Framing




Spot B Zoomable



BROWNIE 26



Spot lighting

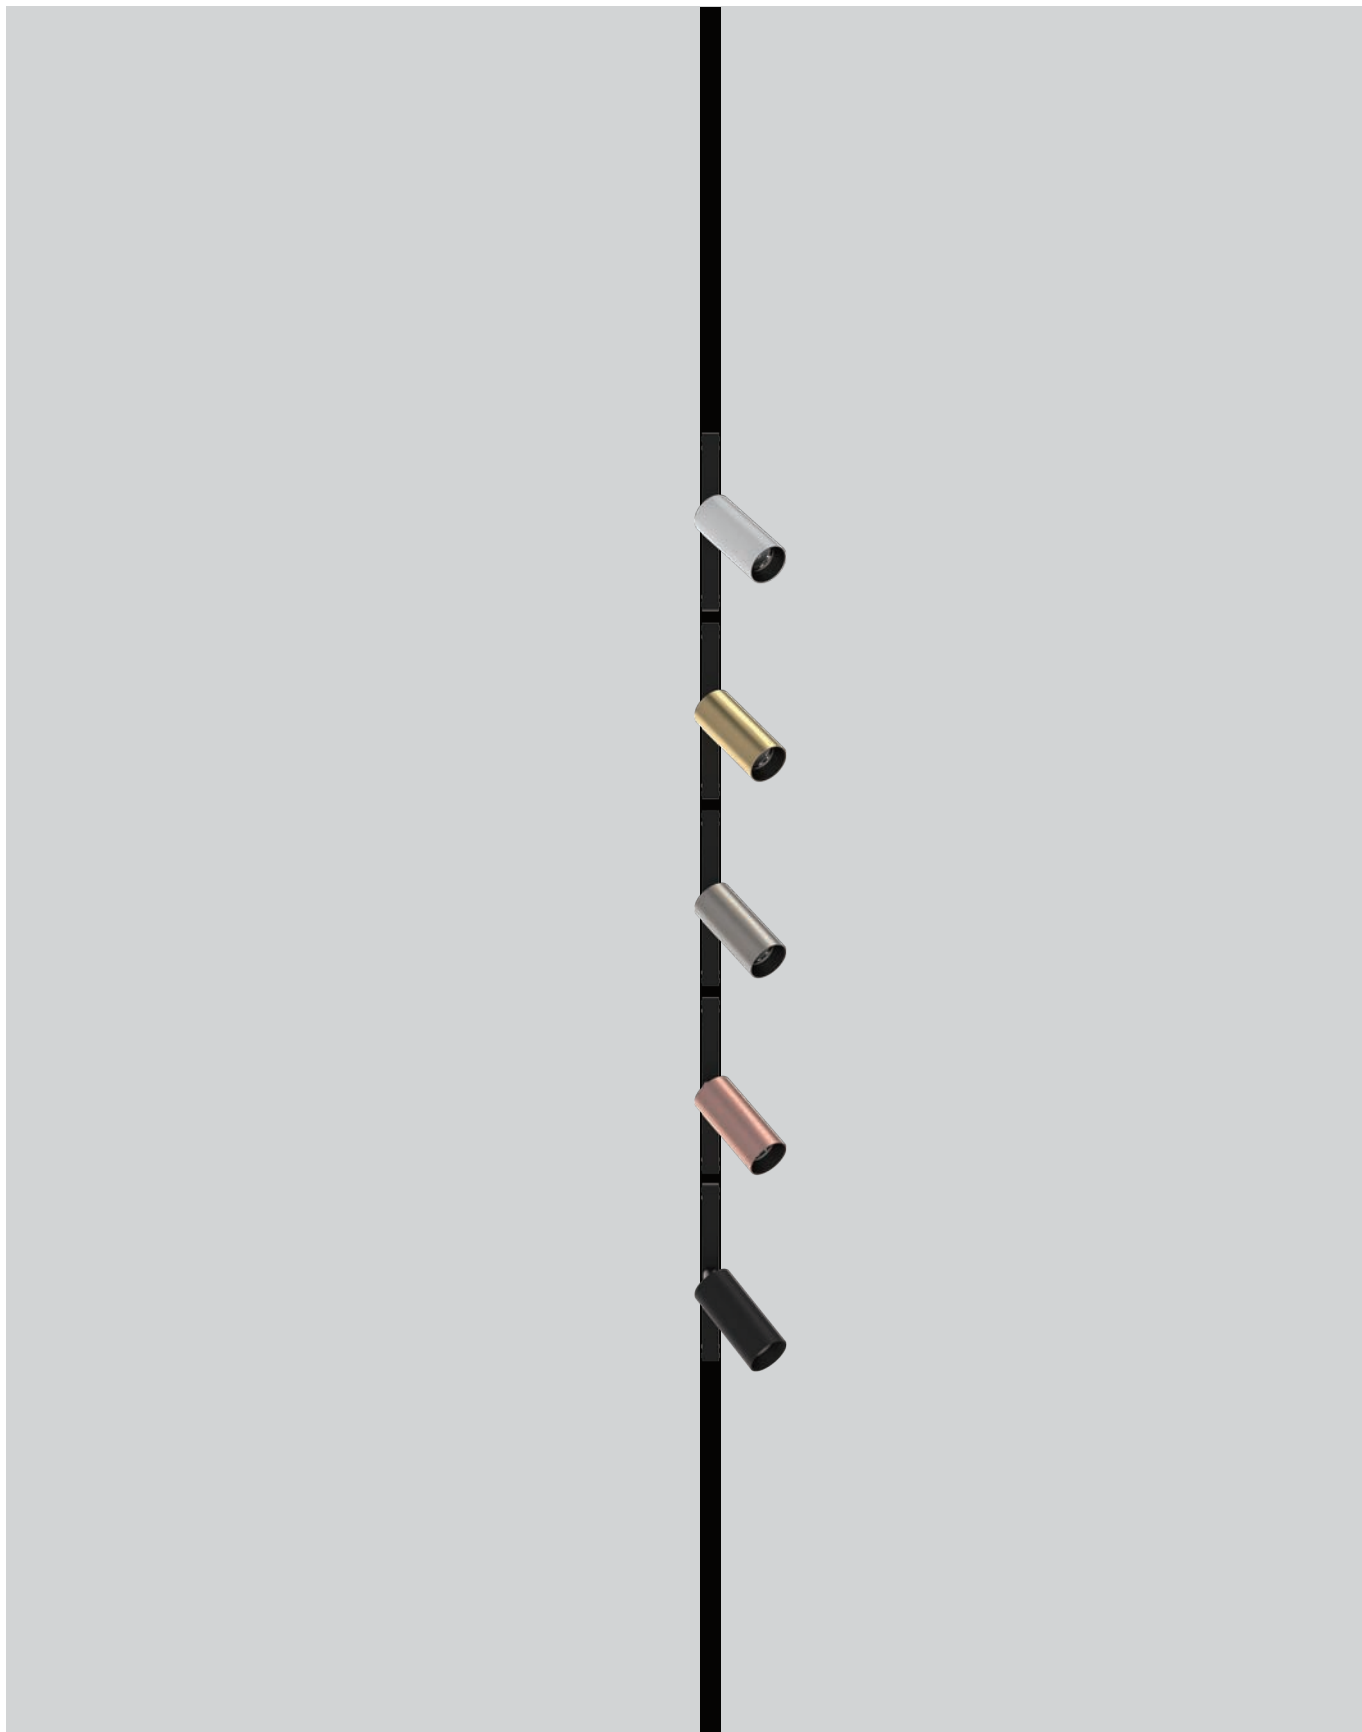



BW26-SA

Spot A



Article number	BW26-48-SA-40-HE	BW26-48-SA-40
Fixture Consumption	8W	9W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	707 (lm)	589 (lm)
Beam Angle	15°/24°/36° /47° (Lens)	15°/24°/36° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐ Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	



Accessory



DS-010
Oval filter



H-005
Honeycomb louver

Article number	BW26-48-SA-50-HE	BW26-48-SA-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	1047 (lm)	899 (lm)
Beam Angle	18°/25°/40° /51° (Lens)	18°/24°/38° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐ Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	




Accessory




DS-011
Oval filter



H-006
Honeycomb louver



Article number	BW26-48-SA-64-HE	BW26-48-SA-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1776 (lm)	1412 (lm)
Beam Angle	20°/25°/40° /50° (Lens)	20°/25°/40° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐	
	Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	



Accessory



S-001
Long snoot



S-002
Asymmetrical
snoot




SG-001
Oval distribution
diffuser



H-001
Honeycomb
louwer



B-002
Barndoor

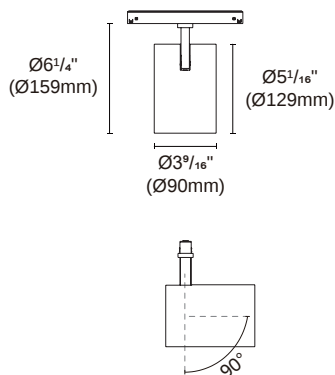

Article number	BW26-48-SA-90-HE	BW26-48-SA-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3746 (lm)	2705 (lm)
Delivered Lumen	-	-
Beam Angle	16°/24°/37°/45° (Lens)	16°/24°/37°/45° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐	
	Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	



Accessory



S-012
Long snoot



S-013
Asymmetrical
snoot



SG-007
Striped glass



H-002
Honeycomb
louwer



B-003
Barndoor

BW26-SB

Spot B



The B Series spotlight combines a two-section design with three diameter options to suit diverse needs. With a CRI of 95 for vibrant, true-to-life colors, it supports accessories like honeycomb grids and diffusion lenses for enhanced flexibility. The 64mm version offers extended customization with optional baffles and lenses, adapting seamlessly to various lighting scenarios.



Oval filter
or Striped glass

Honeycomb louver

Beam mixed and eliminate
the corona effect



Three types of
light-shaping
accessories.



StandardLong snoutAsymmetrical snout



Oval Snout





FramingZoomable




Dynamic oval filter

- Distributions from narrow spot to wallwash
- Adjustable contour and zoom spotlights available
- Plug and play: change lens units without tools and with just one hand



Standard



spot / medium / flood / wide flood




Long snoot




spot / medium / flood / wide flood




Asymmetrical snoot




spot / medium / flood / wide flood




Oval Snoot
or Oval filter or Striped glass

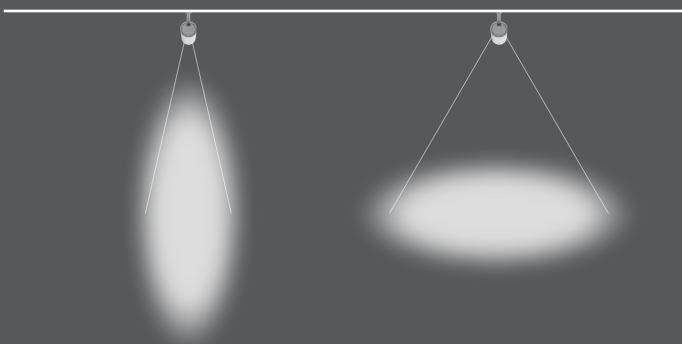

Framing


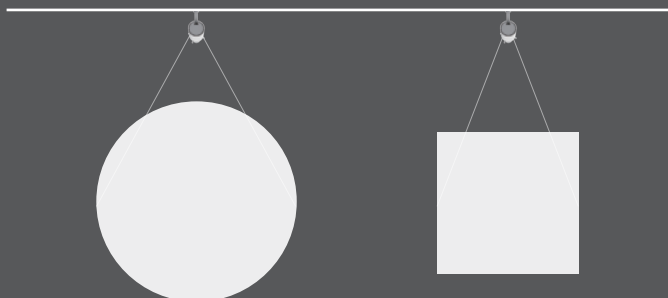


Zoomable

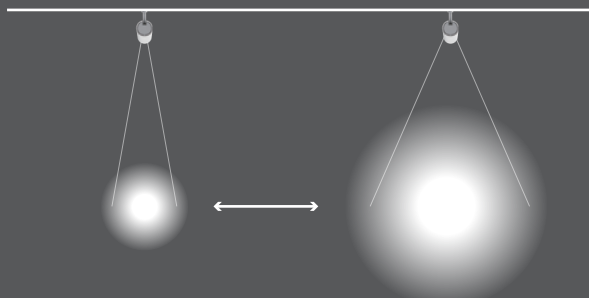

BW26-SB

Spot B



Article number	BW26-48-SB-40-HE	BW26-48-SB-40
Fixture Consumption	8W	9W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	707 (lm)	589 (lm)
Beam Angle	15°/24°/36° /50° (Lens)	15°/24°/36° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐ Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	



Accessory



DS-010
Oval filter



H-005
Honeycomb louver

Article number	BW26-48-SB-50-HE	BW26-48-SB-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	1047 (lm)	899 (lm)
Beam Angle	18°/25°/40° /50° (Lens)	18°/25°/40° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐ Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐	




Accessory



DS-011
Oval filter





H-006
Honeycomb louver




Article number	BW26-48-SB-64-HE	BW26-48-SB-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1776 (lm)	1412 (lm)
Beam Angle	20°/25°/40° /50° (Lens)	20°/25°/40° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □ Customized: Gold ■ Nickel Brushed ■ Rose Gold Brushed ■	




Accessory

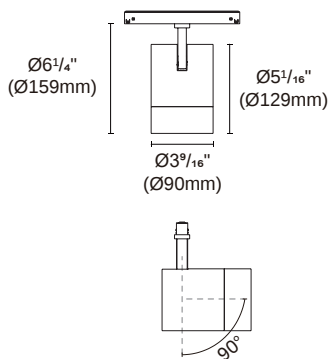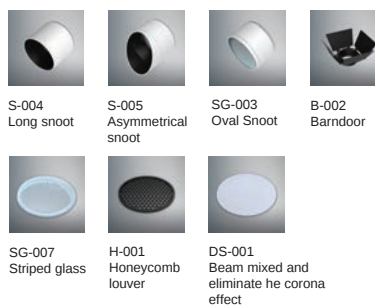


Article number	BW26-48-SB-90-HE	BW26-48-SB-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3876 (lm)	2705 (lm)
Delivered Lumen	-	-
Beam Angle	16°/24°/37°/45° (Lens)	16°/24°/37°/45° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □ Customized: Gold ■ Nickel Brushed ■ Rose Gold Brushed ■	




Accessory

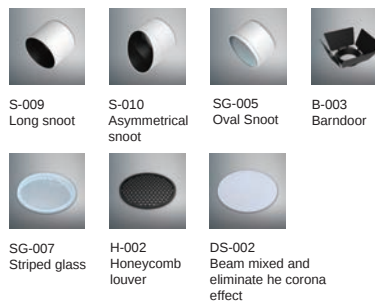



The general projection light effect.



The cut-off light is used to create a specific lighting effect by cutting off the light at a certain point and directing it in a specific direction. This can be used to create a sharp boundary between lit and unlit areas, emphasizing the illuminated areas and creating contrast.

Framing

Professional-grade optical lens

Crafted with a combination of high quality multi layer lenses to enhance light transmission, providing high adjustability, uniform light output, and a wide zoom range.



Available with color filter

Using colored light, you can design and transform environments with subtle or dramatic contrasts. LED enables you to produce colored light very efficiently and flexibly.

The focus lens can be installed in the light bar part of the logo piece to meet customer and site requirements. Additionally, different color change film can also be added to the logo piece to add variation.



There is a variety of color changing lenses available for selection.



Before



After




After

Customization gobo


We use premium materials to customize exclusive customization gobo for each customer, showcasing professional lighting effects.

You can effortlessly create the light art you desire, perfectly aligning with your theme and expressing the unique style you want to convey.

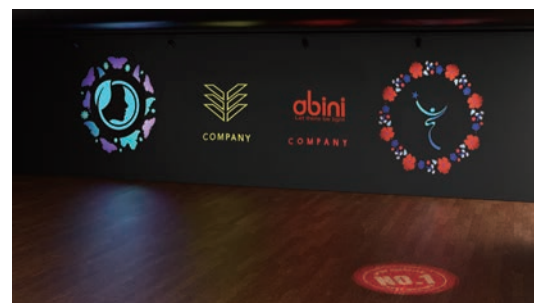

BW26-SBF

Spot B framing

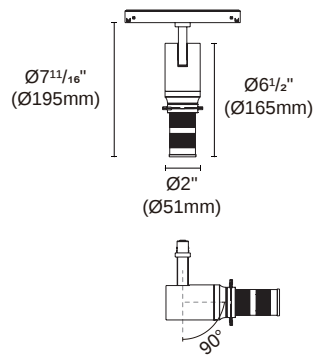

Article number	BW26-48-SBF-50
Fixture Consumption	12W
Voltage	48 VDC
LED Lumen	1040 (lm)
Delivered Lumen	564 (lm)
Beam Angle	22°~32°
CCT	3000K
CRI	95+
Colour	Black ☒ White ☐




Accessory



CF-001-xxx
Color filter



GOBO-001-xxx..
OEM GOBO, please contact with
our sales rep for more info

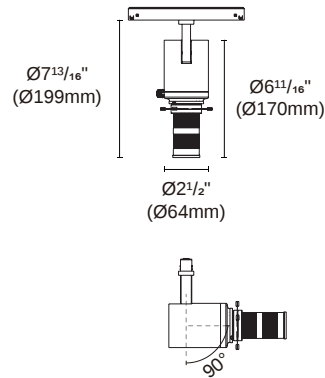

Article number	BW26-48-SBF-64
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1487 (lm)
Delivered Lumen	541 (lm)
Beam Angle	20°~30°
CCT	3000K
CRI	95+
Colour	Black ☒ White ☐



Accessory



CF-001-xxx
Color filter



GOBO-001-xxx..
OEM GOBO, please contact with
our sales rep for more info




Zoomable

The 2-cut lamp body can be precisely adjusted by rotating it, allowing for easy enlargement or reduction of the aperture ratio without the need to open the lamp body.



Easily add dynamic oval filter accessories as desired, installation and adjustment are extremely simple and convenient. making it comfortable for the user to adapt the lighting according to meet the specific needs of the space.

Colours : black / white

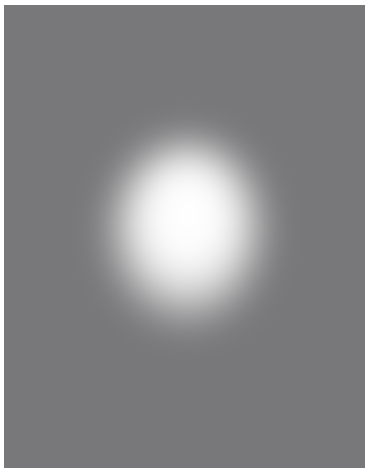


Zoom in



Zoom out

BW26-SBZ

Spot B Zoomable




Article number	BW26-48-SBZ-40-HE	BW26-48-SBZ-40
Fixture Consumption	8W	8W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	421 (lm)	362 (lm)
Beam Angle	15°~40°	15°~40°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐	



Accessory



SG-010
Dynamic oval filter




Article number	BW26-48-SBZ-50-HE	BW26-48-SBZ-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	807 (lm)	665 (lm)
Beam Angle	15°~50°	18°~50°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ☒ White ☐	




Accessory



SG-011
Dynamic oval filter




Article number	BW26-48-SBZ-64-HE	BW26-48-SBZ-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1238 (lm)	939 (lm)
Beam Angle	15°~55°	15°~55°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory



SG-004
Dynamic oval filter

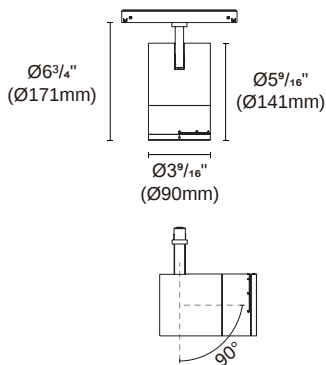

Article number	BW26-48-SBZ-90-HE	BW26-48-SBZ-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3746 (lm)	2705 (lm)
Delivered Lumen	2406 (lm)	1679 (lm)
Beam Angle	16°~60°	16°~60°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory




SG-004
Dynamic oval filter





BW26-P

Panel lighting

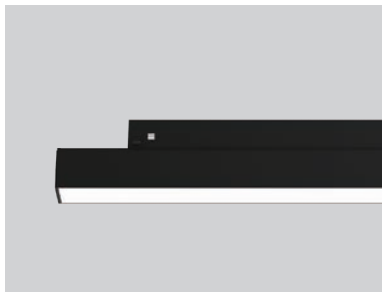



Article number **BW26-48-P-A / BW26-48-P-B / BW26-48-P-C**

Fixture Consumption	6W / 9W / 12W
Voltage	48 VDC
LED Lumen	714 (lm) / 1201 (lm) / 1687 (lm)
Delivered Lumen	219 (lm) / 392 (lm) / 535 (lm)
Beam Angle	90°
CCT	3000K
CRI	90+
Colour	Black ■

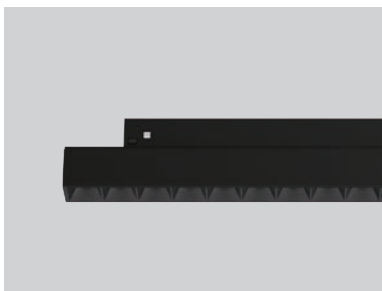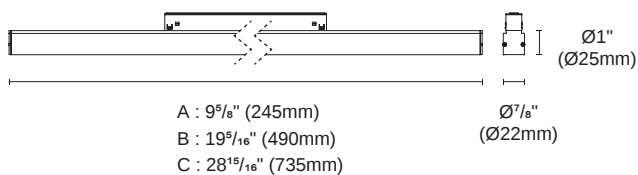

Article number **BW26-48-KD-12 / BW26-48-KD-24**


Fixture Consumption	10W / 15W
Voltage	48 VDC
LED Lumen	1154 (lm) / 1903 (lm)
Delivered Lumen	448 (lm) / 752 (lm)
Beam Angle	30° (Lens)
CCT	3000K
CRI	90+
Colour	Body color : Black ■ White □ Baffle color : Black ■ Crystal □

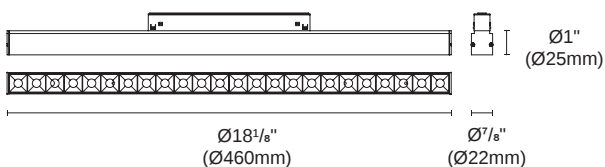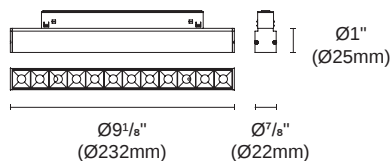




BW26-C

Pendant lighting



Article number	BW26-48-CT-28
Fixture Consumption	7W
Voltage	48 VDC
LED Lumen	712 (lm)
Delivered Lumen	596 (lm)
Beam Angle	20°/24°/34° /56° (Lens)
CCT	3000K
CRI	90+
Colour	Black ☒ White ☐




Article number	BW26-48-CT-40
LED Consumption	8W
Voltage	48 VDC
LED Lumen	806 (lm)
Delivered Lumen	707 (lm)
Beam Angle	15°/24°/36° /47° (Lens)
CCT	3000K
CRI	90+
Colour	Black ☒ White ☐



BW26-C

Pendant lighting




Article number	BW26-48-CT-64
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1994 (lm)
Delivered Lumen	1776 (lm)
Beam Angle	20°/25°/38° /50° (Lens)
CCT	3000K
CRI	90+
Colour	Black ☒ White ☐ Customized: Gold ☐ Nickel Brushed ☐ Rose Gold Brushed ☐



Accessory



H-001
Honeycomb louver



Article number	BW26-48-CA
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1994 (lm)
Delivered Lumen	1755 (lm)
Beam Angle	18°/25°/38°/52°(Lens)
CCT	3000K
CRI	90+
Colour	Black ☒ White ☐





Article number	BW26-48-CMO-200 / BW26-48-CMO-400
Fixture Consumption	9W / 20W
Voltage	48 VDC
LED Lumen	1300 (lm) / 3312 (lm)
Delivered Lumen	1127 (lm) / 2819 (lm)
Beam Angle	110°
CCT	4000K
CRI	90+
Colour	Black ■ White □

