

# BROWNIE 26 (EU)

system



## BROWNIE 26


Creativity in linear style

BROWNIE-26 is our 48V magnetic track lighting system. It features a modular design that supports a variety of configurations, including linear LED modules and spotlights. The track can be surface-mounted, suspended, or recessed to suit different installation needs.

# BROWNIE 26

## TRACK

BW26 09~12



BW26-48-TS  
Surface



BW26-48-TSH  
Surface/ Pendant



BW26-48-TLH  
Recessed Trimless

## MODULES

### Spot light Spot A

BW26 13~28



BW26-48-SA-HE-40  
Ø40 / 8W



BW26-48-SA-HE-50  
Ø50 / 11W



BW26-48-SA-HE-64  
Ø64 / 15W



BW26-48-SA-HE-90  
Ø90 / 24W

### Spot light Spot B

BW26 13~28



BW26-48-SB-40  
Ø40 / 8W



BW26-48-SB-50  
Ø50 / 11W



BW26-48-SB-64  
Ø64 / 14W



BW26-48-SB-90  
Ø90 / 24W



BW26-48-SBZ-40  
Ø40 / 8W  
Zoomable



BW26-48-SBZ-50  
Ø50 / 11W  
Zoomable



BW26-48-SBZ-64  
Ø64 / 14W  
Zoomable



BW26-48-SBZ-90  
Ø90 / 24W  
Zoomable



BW26-48-SBF-50  
Ø50 / 11W  
Framing



BW26-48-SBF-64  
Ø64 / 14W  
Framing

**Panel light**  
BW26 29~30



BW26-48-P-A  
6W



BW26-48-P-B  
9W



BW26-48-P-C  
12W

**Accent light**  
BW26 29~30



BW26-48-KD-12  
10W



BW26-48-KD-24  
15W

**Pendant light**  
BW26 31~34



BW26-48-CT-28  
Ø28 / 7W



BW26-48-CT-40  
Ø40 / 8W



BW26-48-CT-64  
Ø64 / 15W



BW26-48-CA  
Ø100 / 15W



BW26-48-CMO-200  
Ø200 / 9W





BW26-48-CMO-400  
Ø400 / 20W

# BROWNIE 26

## Micro track system

---

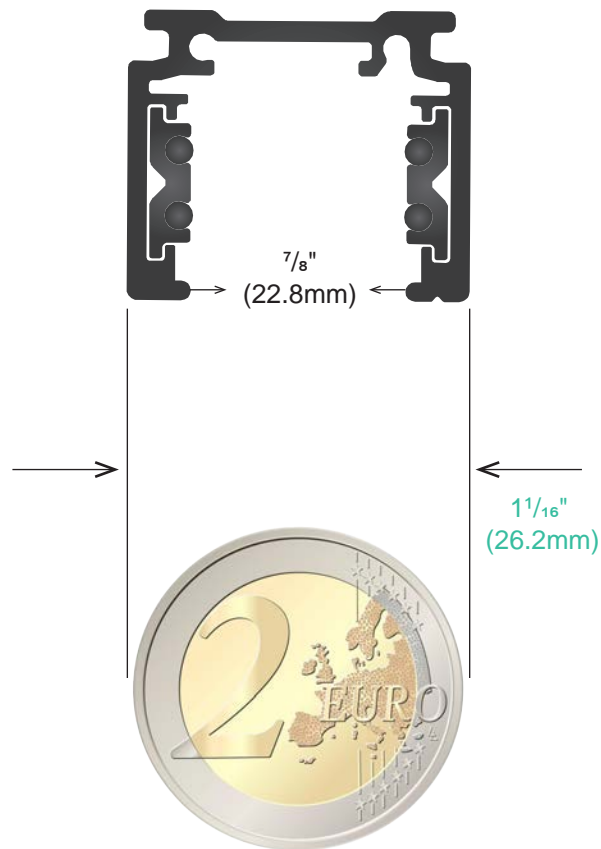

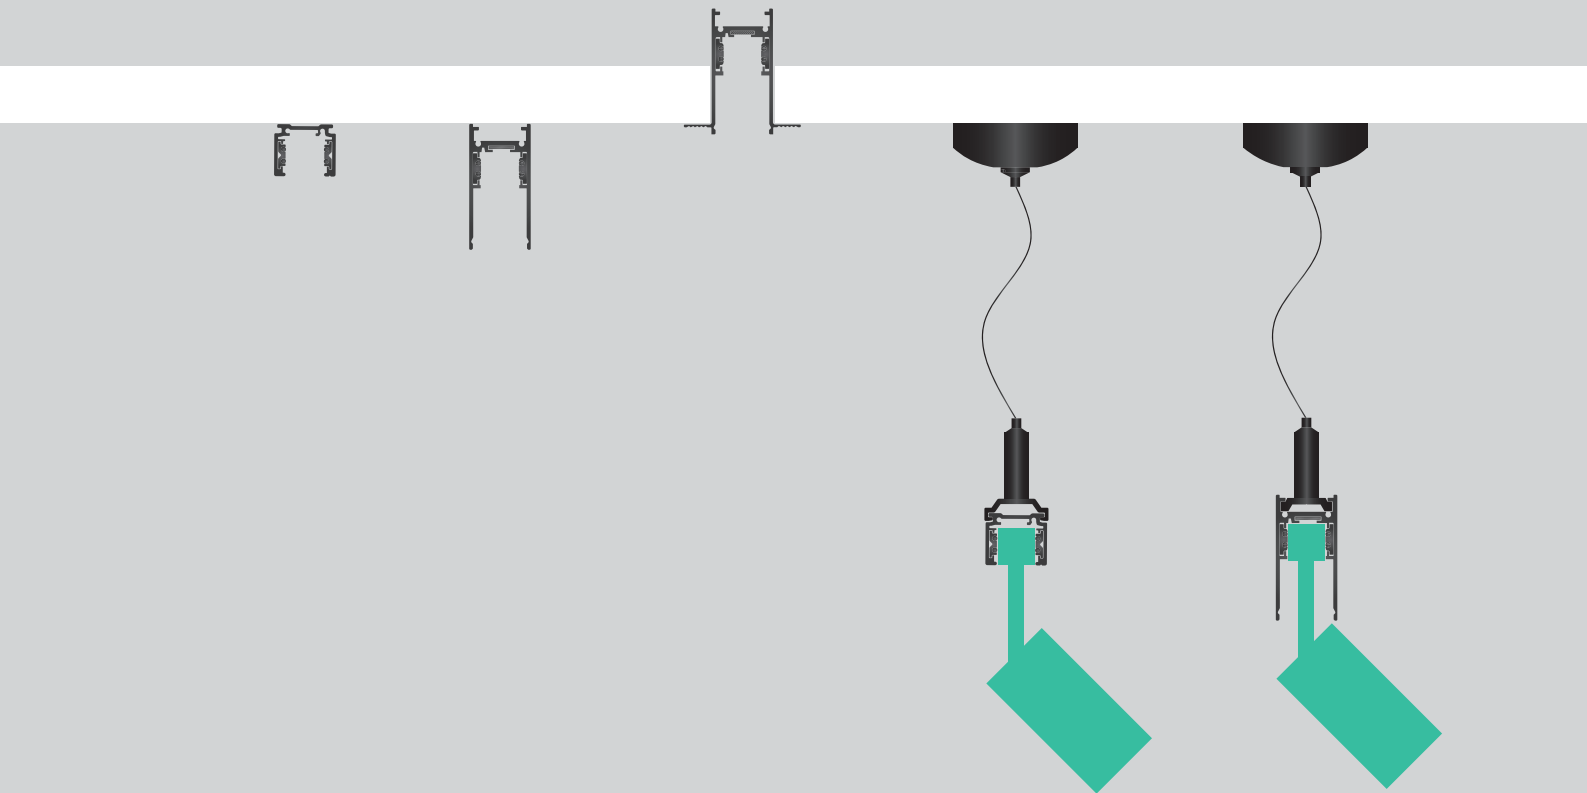

## BROWNIE 26

This linear connection system offers flexible installation options, including trimless recessed, surface-mounted, and pendant-mounted configurations, making it suitable for a wide range of interior spaces.

The LED modules feature a clean, linear design, with each series offering unique functionalities—making lighting design easier and more efficient than ever.






# BROWNIE 26

# BROWNIE 26

## Surface Mounted

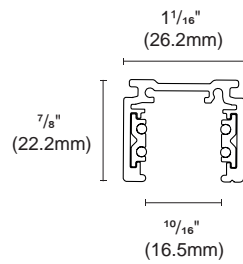


Article number	L (mm)
BW26-48-TS-1000	39.37" (1000mm)
BW26-48-TS-2000	78.74" (2000mm)

Colour Black ■ White □

### Track accessories

#### BW26-48-TS-RH

Horizontal corner  
for BW26-48-TS track

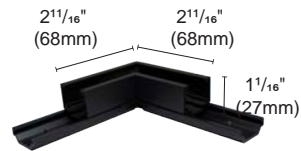

#### BW26-48-TS-RV

Vertical corner  
for BW26-48-TS track



#### BNC-37A

End cap



#### BNC-37B

End cap with wire exit




#### BNI-23

Pendant Kit



# BROWNIE 26 Surface Mounted / Pendant Track

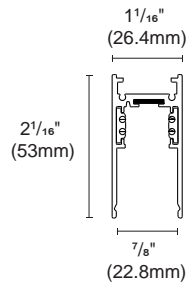


Article number	L (mm)
BW26-48-TSH-1000	39.37" (1000mm)
BW26-48-TSH-2000	78.74" (2000mm)

Colour Black ■ White □

## Track accessories


### BW26-48-TSH-RH

Horizontal corner  
for BW26-48-TSH track

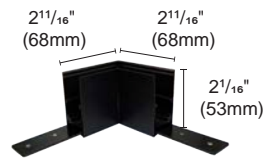

### BW26-48-TSH-RV

Vertical corner  
for BW26-48-TSH track



### BNC-36A

End cap



### BNC-36B

End cap with wire exit




### BNI-22

Pendant Kit



# BROWNIE 26 Recessed Trimless

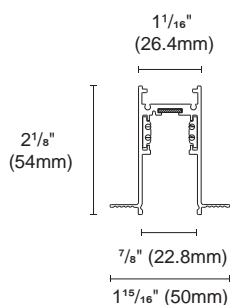


Article number	L (mm)
BW26-48-TLH-1000	39.37" (1000mm)
BW26-48-TLH-2000	78.74" (2000mm)

Colour Black ■ White □

## Track accessories

### BW26-48-TLH-RH

Horizontal corner  
for BW26-48-TLH track

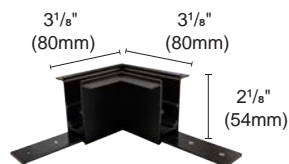

### BW26-48-TLH-RV

Vertical corner  
for BW26-48-TLH track



### BNC-36A

End cap



### BNC-36B

End cap with wire exit



# BROWNIE 26 Track System Accessories

CIRCUIT JOINT

	Article number	TYPE
	BNC-31	Power joint
	Article number	TYPE
	BNC-34	Circuit joint (short)
	Article number	TYPE
	BNC-35	Circuit joint (long)
	Article number	TYPE
	BNC-33	L Circuit joint
	Article number	TYPE
	BNC-32	I Circuit joint



# BROWNIE 26

## Spot lighting



Ø40



Ø50



Ø64




Ø90

Spot A



Spot B

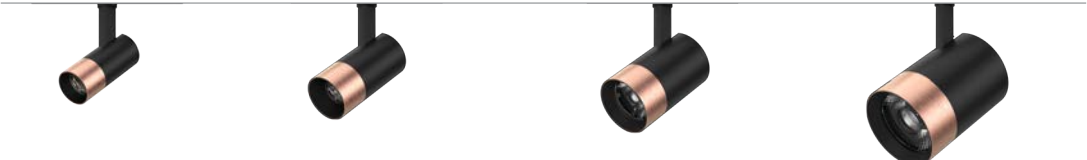

Spot B Framing




Spot B Zoomable




# BROWNIE 26

Spot lighting

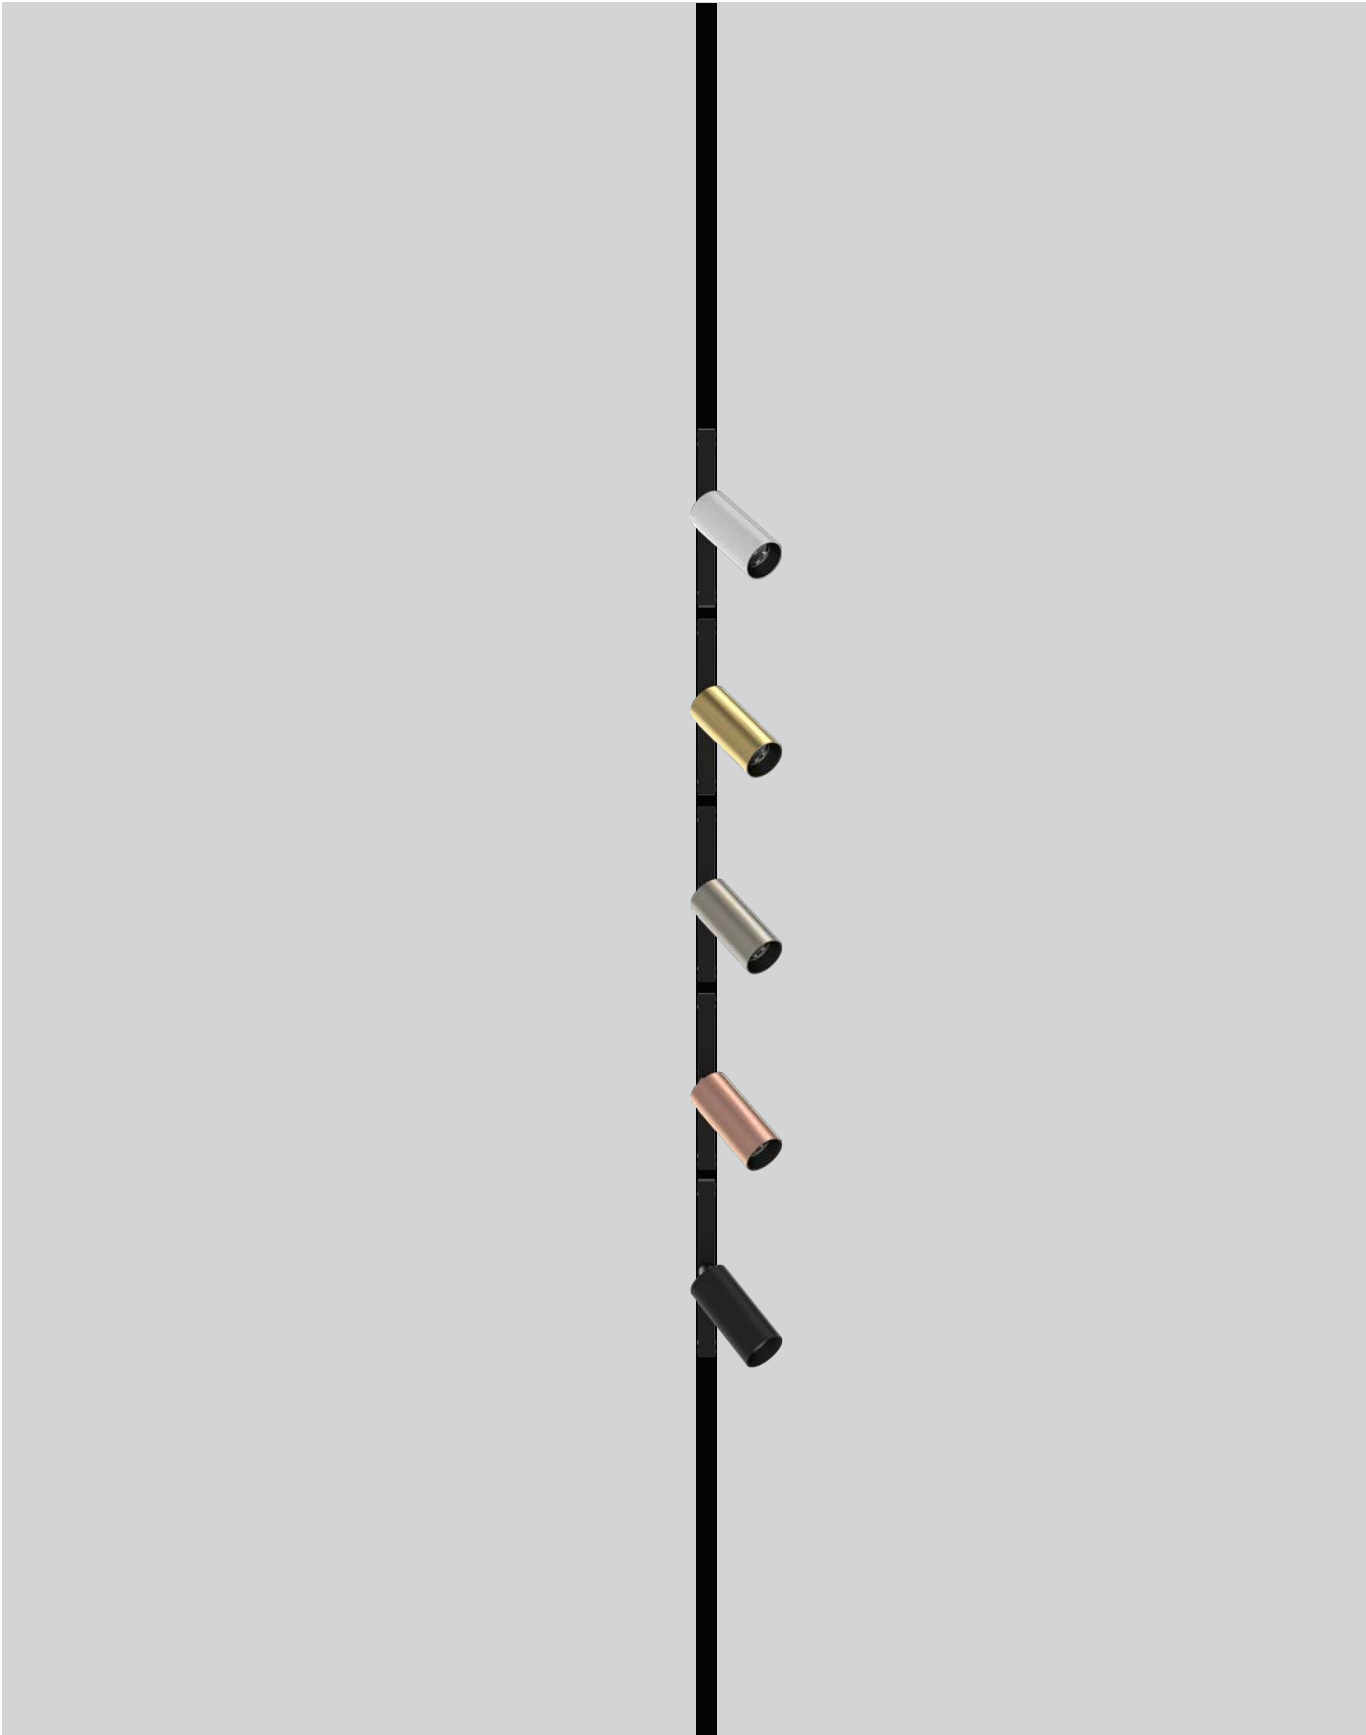



Rose Gold Brushed

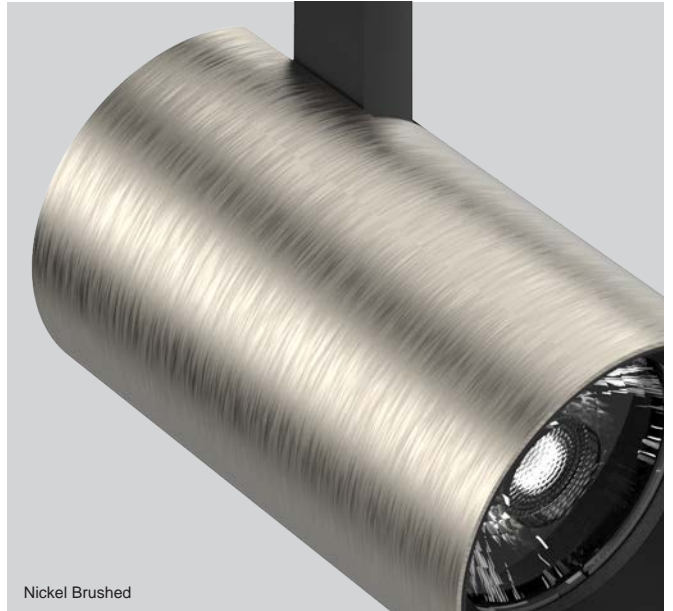

Nickel Brushed



Black





Gold



White

# BW26-SA

## Spot A

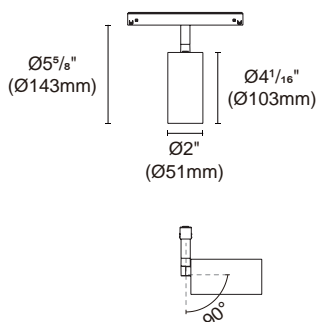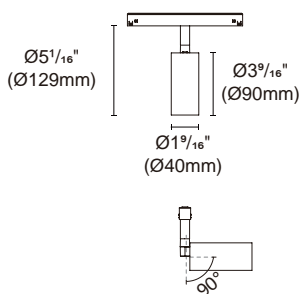

Article number	BW26-48-SA-40-HE	BW26-48-SA-40
Fixture Consumption	8W	9W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	707 (lm)	589 (lm)
Beam Angle	15°/24°/36° /50° (Lens)	15°/24°/36° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/> Customized: Gold <input type="checkbox"/> Nickel Brushed <input type="checkbox"/> Rose Gold Brushed <input type="checkbox"/>	



### Accessory



DS-010  
Oval filter



H-005  
Honeycomb louver

Article number	BW26-48-SA-50-HE	BW26-48-SA-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	1047 (lm)	899 (lm)
Beam Angle	18°/25°/40° /50° (Lens)	18°/25°/40° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/> Customized: Gold <input type="checkbox"/> Nickel Brushed <input type="checkbox"/> Rose Gold Brushed <input type="checkbox"/>	




### Accessory




DS-011  
Oval filter



H-006  
Honeycomb louver

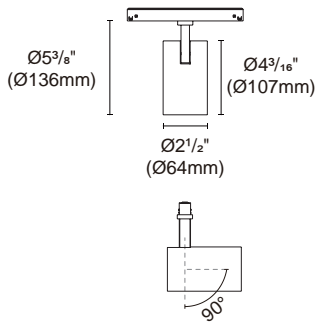


Article number	BW26-48-SA-64-HE	BW26-48-SA-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1776 (lm)	1412 (lm)
Beam Angle	18°/24°/38° /50° (Lens)	18°/24°/38° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/> Customized: Gold <input type="checkbox"/> Nickel Brushed <input type="checkbox"/> Rose Gold Brushed <input type="checkbox"/>	



Accessory



S-001 Long snoot  
S-002 Asymmetrical snoot  
SG-001 Oval distribution diffuser  
H-001 Honeycomb louver  
B-002 Barndoor

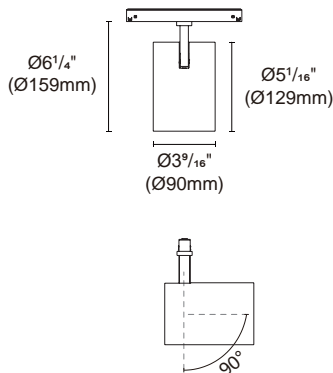

Article number	BW26-48-SA-90-HE	BW26-48-SA-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3746 (lm)	2705 (lm)
Delivered Lumen	-	-
Beam Angle	18°/24°/40°/60° (Lens)	18°/24°/40°/60° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/> Customized: Gold <input type="checkbox"/> Nickel Brushed <input type="checkbox"/> Rose Gold Brushed <input type="checkbox"/>	



Accessory



S-012 Long snoot  
S-013 Asymmetrical snoot  
SG-007 Striped glass  
H-002 Honeycomb louver  
B-003 Barndoor

# BW26-SB

## Spot B



The B Series spotlight combines a two-section design with three diameter options to suit diverse needs. With a CRI of 95 for vibrant, true-to-life colors, it supports accessories like honeycomb grids and diffusion lenses for enhanced flexibility. The 64mm version offers extended customization with optional baffles and lenses, adapting seamlessly to various lighting scenarios.

Lens  
20°/25°/38°/50°

Oval filter or Striped glass  
Honeycomb louver  
Beam mixed and eliminate the corona effect

Three types of light-shaping accessories.


Standard Long snoot Asymmetrical snoot Oval Snoot

Framing Zoomable Dynamic oval filter

- Distributions from narrow spot to wallwash
- Adjustable contour and zoom spotlights available
- Plug and play: change lens units without tools and with just one hand




Standard



spot / medium / flood / wide flood




Long snoot



spot / medium / flood / wide flood




Asymmetrical snoot




spot / medium / flood / wide flood




Oval Snoot  
or Oval filter or Striped glass

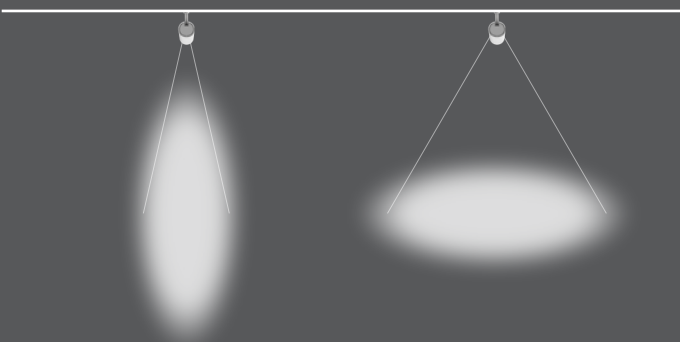

Framing


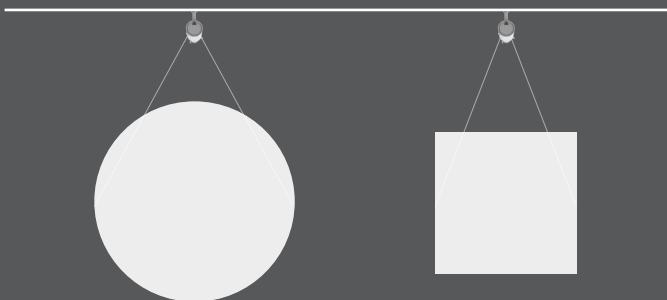


Zoomable

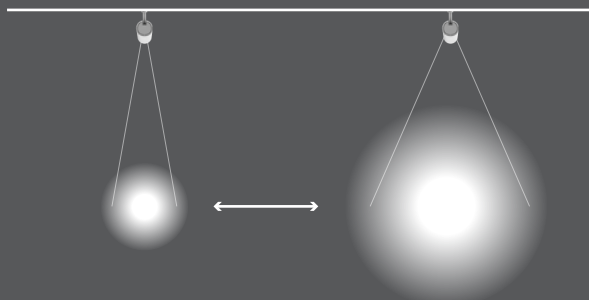

# BW26-SB

## Spot B

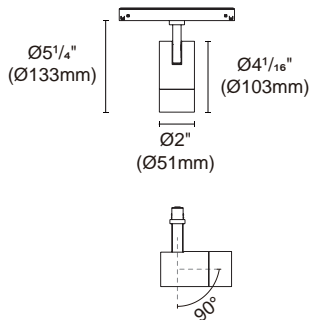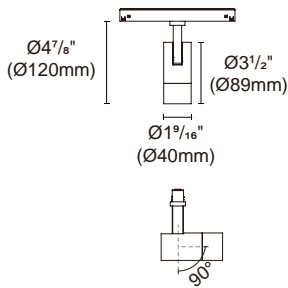

Article number	BW26-48-SB-40-HE	BW26-48-SB-40
Fixture Consumption	8W	9W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	707 (lm)	589 (lm)
Beam Angle	15°/24°/36° /50° (Lens)	15°/24°/36° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/>	

Customized: Gold  Nickel Brushed  Rose Gold Brushed



### Accessory



DS-010  
Oval filter



H-005  
Honeycomb louver

Article number	BW26-48-SB-50-HE	BW26-48-SB-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	1047 (lm)	899 (lm)
Beam Angle	18°/25°/40° /50° (Lens)	18°/25°/40° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/>	

Customized: Gold  Nickel Brushed  Rose Gold Brushed




### Accessory



DS-011  
Oval filter





H-006  
Honeycomb louver

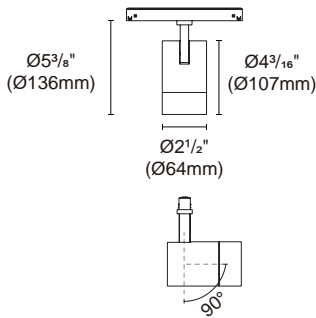

Article number	BW26-48-SB-64-HE	BW26-48-SB-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1776 (lm)	1412 (lm)
Beam Angle	18°/24°/38° /50° (Lens)	18°/24°/38° /50° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □ Customized: Gold ■ Nickel Brushed ■ Rose Gold Brushed ■	




Accessory

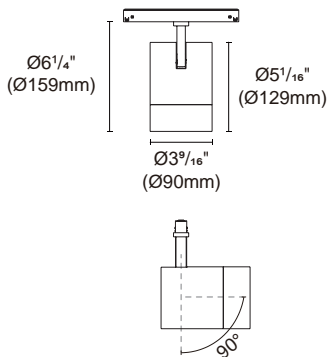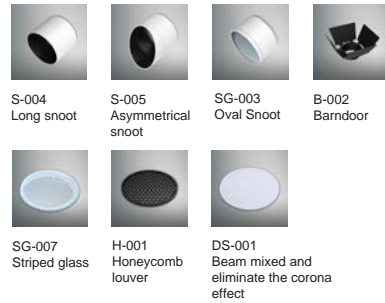

Article number	BW26-48-SB-90-HE	BW26-48-SB-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3876 (lm)	2705 (lm)
Delivered Lumen	3326 (lm)	2603 (lm)
Beam Angle	18°/24°/40°/60° (Lens)	18°/24°/40°/60° (Lens)
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □ Customized: Gold ■ Nickel Brushed ■ Rose Gold Brushed ■	



Accessory

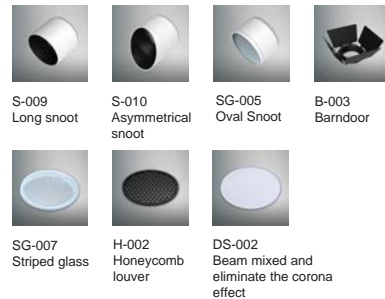



The general projection light effect.



The cut-off light is used to create a specific lighting effect by cutting off the light at a certain point and directing it in a specific direction. This can be used to create a sharp boundary between lit and unlit areas, emphasizing the illuminated areas and creating contrast.

## Framing

### Professional-grade optical lens

Crafted with a combination of high quality multi layer lenses to enhance light transmission, providing high adjustability, uniform light output, and a wide zoom range.



## Available with color filter

Using colored light, you can design and transform environments with subtle or dramatic contrasts. LED enables you to produce colored light very efficiently and flexibly.

The focus lens can be installed in the light bar part of the logo piece to meet customer and site requirements. Additionally, different color change film can also be added to the logo piece to add variation.



There is a variety of color changing lenses available for selection.



Before



After



After

## Customization gobo


We use premium materials to customize exclusive customization gobo for each customer, showcasing professional lighting effects.

You can effortlessly create the light art you desire, perfectly aligning with your theme and expressing the unique style you want to convey.




# BW26-SBF

## Spot B framing

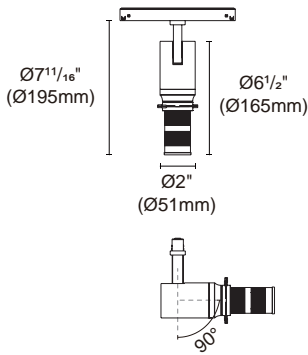

Article number	BW26-48-SBF-50
Fixture Consumption	12W
Voltage	48 VDC
LED Lumen	1040 (lm)
Delivered Lumen	564 (lm)
Beam Angle	$22^\circ \sim 32^\circ$
CCT	3000K
CRI	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/>




### Accessory



CF-001-xxx  
Color filter



GOBO-001-xxx..  
OEM GOBO, please contact with  
our sales rep for more info

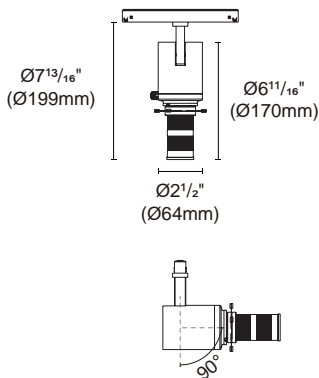

Article number	BW26-48-SBF-64
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1487 (lm)
Delivered Lumen	541 (lm)
Beam Angle	$20^\circ \sim 30^\circ$
CCT	3000K
CRI	95+
Colour	Black <input checked="" type="checkbox"/> White <input type="checkbox"/>



### Accessory



CF-001-xxx  
Color filter




GOBO-001-xxx..  
OEM GOBO, please contact with  
our sales rep for more info




# Zoomable

The 2-cut lamp body can be precisely adjusted by rotating it, allowing for easy enlargement or reduction of the aperture ratio without the need to open the lamp body.

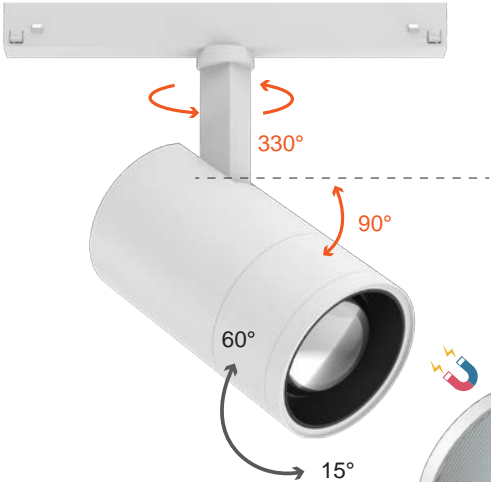


Easily add dynamic oval filter accessories as desired, installation and adjustment are extremely simple and convenient. making it comfortable for the user to adapt the lighting according to meet the specific needs of the space.

Colours : black / white

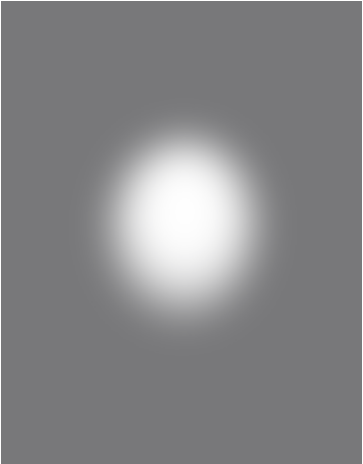


Zoom in

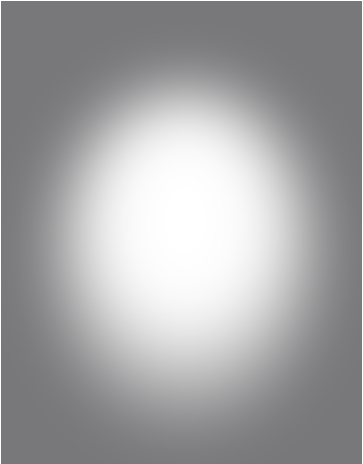

Zoom out

# BW26-SBZ

## Spot B Zoomable

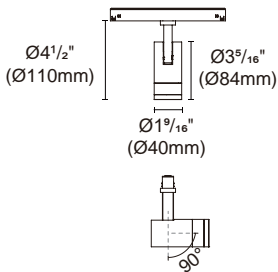


Article number	BW26-48-SBZ-40-HE	BW26-48-SBZ-40
Fixture Consumption	8W	8W
Voltage	48 VDC	48 VDC
LED Lumen	806 (lm)	644 (lm)
Delivered Lumen	421 (lm)	362 (lm)
Beam Angle	15°~40°	15°~40°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory



SG-010  
Dynamic oval filter

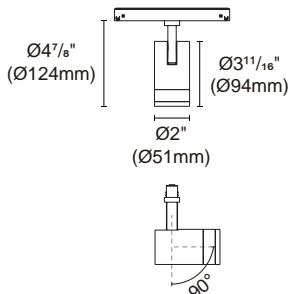


Article number	BW26-48-SBZ-50-HE	BW26-48-SBZ-50
Fixture Consumption	12W	12W
Voltage	48 VDC	48 VDC
LED Lumen	1274 (lm)	1040 (lm)
Delivered Lumen	807 (lm)	665 (lm)
Beam Angle	15°~50°	18°~50°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory



SG-011  
Dynamic oval filter

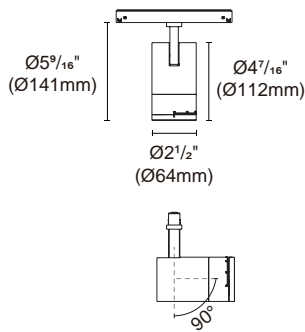


Article number	BW26-48-SBZ-64-HE	BW26-48-SBZ-64
Fixture Consumption	15W	15W
Voltage	48 VDC	48 VDC
LED Lumen	2106 (lm)	1487 (lm)
Delivered Lumen	1238 (lm)	939 (lm)
Beam Angle	15°-55°	15°-55°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory



SG-004  
Dynamic oval filter

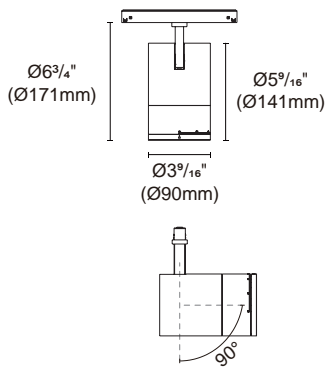

Article number	BW26-48-SBZ-90-HE	BW26-48-SBZ-90
Fixture Consumption	24W	24W
Voltage	48 VDC	48 VDC
LED Lumen	3746 (lm)	2705 (lm)
Delivered Lumen	2406 (lm)	1679 (lm)
Beam Angle	16°-60°	16°-60°
CCT	3000K	3000K
CRI	90+	95+
Colour	Black ■ White □	



Accessory




SG-006  
Dynamic oval filter





# BW26-P



## Panel lighting

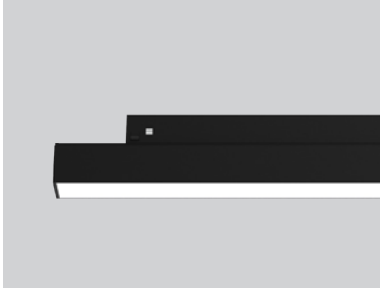

Article number	BW26-48-P-A / BW26-48-P-B / BW26-48-P-C
Fixture Consumption	6W / 9W / 12W
Voltage	48 VDC
LED Lumen	714 (lm) / 1201 (lm) / 1687 (lm)
Delivered Lumen	219 (lm) / 392 (lm) / 535 (lm)
Beam Angle	90°
CCT	3000K
CRI	90+
Colour	Black ■

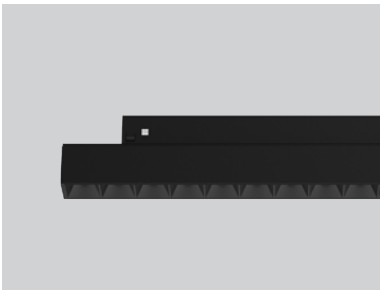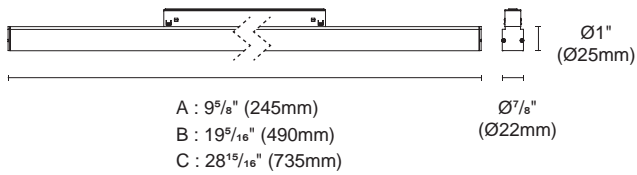


Article number	BW26-48-KD-12 / BW26-48-KD-24
Fixture Consumption	10W / 15W
Voltage	48 VDC
LED Lumen	1154 (lm) / 1903 (lm)
Delivered Lumen	448 (lm) / 752 (lm)
Beam Angle	30° (Lens)
CCT	3000K
CRI	90+
Colour	Body color : Black ■ White □ Baffle color : Black ■ Crystal □

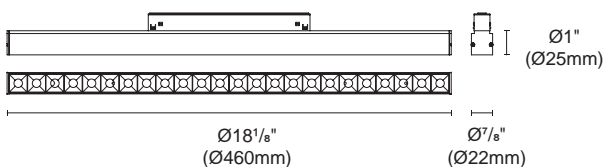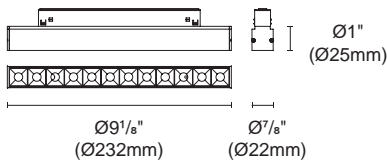




# BW26-C

## Pendant lighting

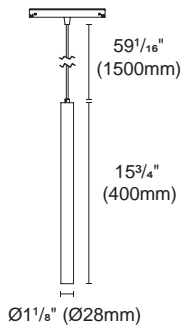

Article number	<b>BW26-48-CT-28</b>
Fixture Consumption	7W
Voltage	48 VDC
LED Lumen	712 (lm)
Delivered Lumen	596 (lm)
Beam Angle	20°/25°/36° /55° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■ White □

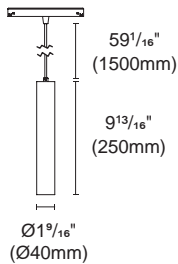


Article number	<b>BW26-48-CT-40</b>
LED Consumption	8W
Voltage	48 VDC
LED Lumen	806 (lm)
Delivered Lumen	707 (lm)
Beam Angle	15°/24°/36° /45° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■ White □



# BW26-C

## Pendant lighting

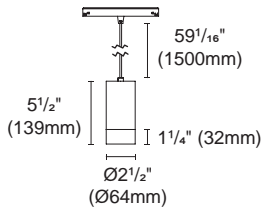


Article number	BW26-48-CT-64
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1994 (lm)
Delivered Lumen	1776 (lm)
Beam Angle	20°/25°/40° /50° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■ White □ Customized: Gold ■ Nickel Brushed ■ Rose Gold Brushed ■



### Accessory



H-001  
Honeycomb louver

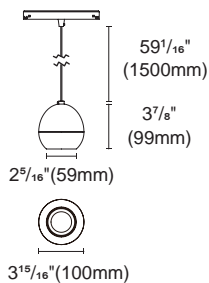

Article number	BW26-48-CA
Fixture Consumption	15W
Voltage	48 VDC
LED Lumen	1994 (lm)
Delivered Lumen	1755 (lm)
Beam Angle	18°/25°/40°/50° (Lens)
CCT	3000K
CRI	90+
Colour	Black ■ White □





Article number	BW26-48-CMO-200 / BW26-48-CMO-400
Fixture Consumption	9W / 20W
Voltage	48 VDC
LED Lumen	1300 (lm) / 3312 (lm)
Delivered Lumen	1127 (lm) / 2819 (lm)
Beam Angle	110°
CCT	4000K
CRI	90+
Colour	Black ■ White □

