

STARLUX SERIES

(AM-C.V.)
UL-1598



STARLUX (AM)

Discover the "Starlux" - The Ultimate Lighting Solution!

- Versatile design
- Easy installation
- Modular and customizable
- Non-glare technology
- Low maintenance
- Transform any space

Upgrade your lighting game with the STARLUX. Experience its versatility, easy installation, and customizable features. Say goodbye to glare and enjoy a low-maintenance lighting solution. Transform your space into a well-lit haven today!
Illuminate your world with the STARLUX.

Shape
(Baffle Size)



Round
1.5"



Square
1.5"



2 lamp
1.5"



3 lamp
1.5"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions




Adjustable

STARLUX-1.5"


recessed downlights



LEA-33A-HE



Flat
Adjustable



Eye
Adjustable

Round

Trim



Trimless



Square

Trim



Trimless



Multiple lights

2 Lamp
Trim



2 Lamp
Trimless



3 Lamp
Trim



3 Lamp
Trimless




STARLUX-1.5"


RISE's STARLUX-1.5" deliver high lumens to your spaces while remaining fully workable from below the ceiling plane.

FEATURES


- STARLUX-1.5" downlight offer a tiny new form element for a minutest downlight artistic.
- Industry leading luminescence and craftsmanship



Adjustable
Flat



Adjustable
Eye

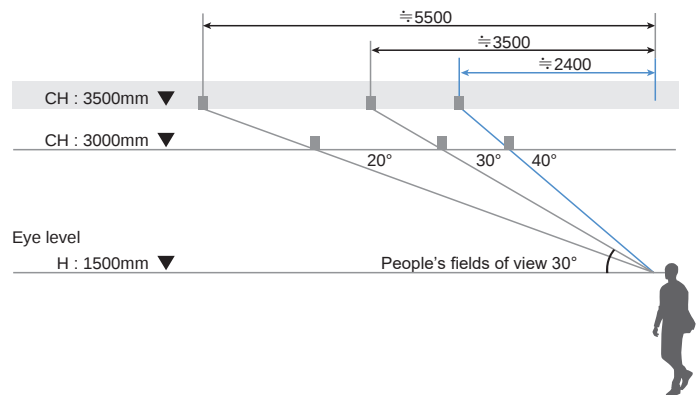

Bigger the cut-off angle, the more the visible glare is reduced





STARLUX-1.5" round
adjustable




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

TRIAC, 1-10V

Types



Colours

Bezel : ☒ Black ☐ White

Baffle : ☒ Black ☐ White

Beam Angle



20°/30°/45°/55° (Lens)




STARLUX-FLAT-RTA



Article number	2218.510-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1377 (lm)	1165 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------




 Cut out : 2 4/32" (54mm)


STARLUX-EYE-RTA



Article number	2218.511-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1351 (lm)	1142 (lm)
Beam Angle	20°/30°/40°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------



 Cut out : 2 4/32" (54mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass


STARLUX-FLAT-RTLA



Article number	2218.240F-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1377 (lm)	1165 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**


TRIAC	1-10V
-------	-------

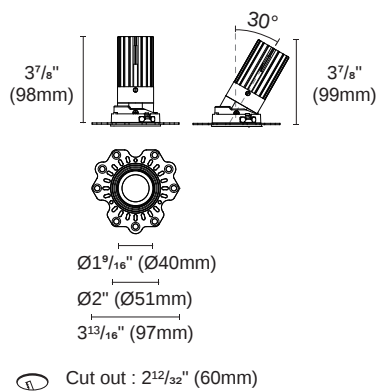


STARLUX-EYE-RTLA



Article number	2218.241F-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1351 (lm)	1142 (lm)
Beam Angle	20°/30°/40°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------

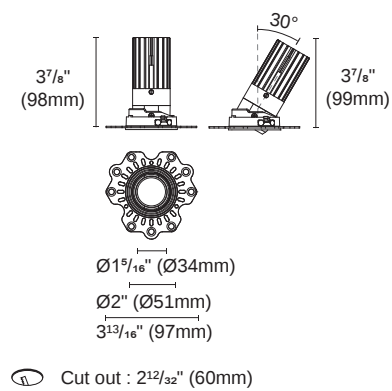**Accessories**ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

STARLUX-1.5" Multiple lights
adjustable



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

TRIAC, 1-10V

Types

	1 lamp	2 lamp	3 lamp
Trim	 □2.76" (□70mm)	 5.28" (134mm)	 7.6" (193mm)
Trimless	 □2.29" (□58mm)	 4.65" (118mm)	 6.93" (176mm)

Colours

- Bezel :  Black  White
- Baffle :  Black  White

Beam Angle



20°/30°/45°/55° (Lens)




STARLUX-FLAT-STA



Article number	2214.411-1-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1385 (lm)	1171 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------



Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


STARLUX-FLAT-2-STA



Article number	2214.411-2-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	28W	19W
Current	300 (mA)X2	450 (mA)
Delivered Lumen	1385 (lm)X2	2126 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP20A-1WMC	

**Dimmable**

TRIAC	1-10V
-------	-------

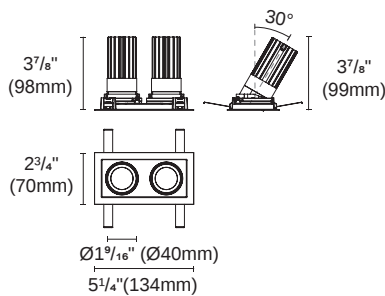

Cut out : 2¹³/₃₂"x4³/₄" (61x121mm)


STARLUX-FLAT-3-STA



Article number	2214.411-3-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	42W	26W
Current	300 (mA)X3	650 (mA)
Delivered Lumen	1385 (lm)X3	3087 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP40A-1WMC-850	

**Dimmable**

TRIAC	1-10V
-------	-------

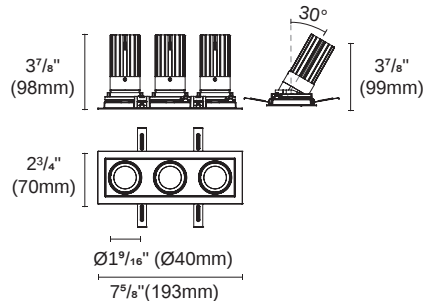

Cut out : 2¹³/₃₂"x7¹/₈" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass


STARLUX-EYE-STA



Article number	2214.412-1-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1385 (lm)	1148 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------



Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


STARLUX-EYE-2-STA



Article number	2214.412-2-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	28W	19W
Current	300 (mA)X2	450 (mA)
Delivered Lumen	1385 (lm)X2	2090 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
	(IC)	PUP20A-1WMC

**Dimmable**

TRIAC	1-10V
-------	-------

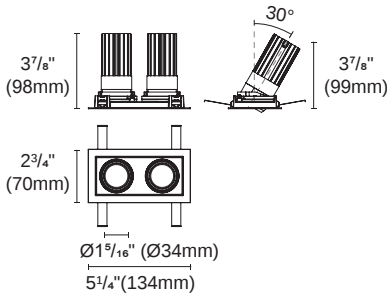

Cut out : 2¹³/₃₂"x4³/₄" (61x121mm)


STARLUX-EYE-3-STA



Article number	2214.412-3-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	42W	26W
Current	300 (mA)X3	650 (mA)
Delivered Lumen	1385 (lm)X3	3027 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
	(IC)	PUP40A-1WMC-850

**Dimmable**

TRIAC	1-10V
-------	-------

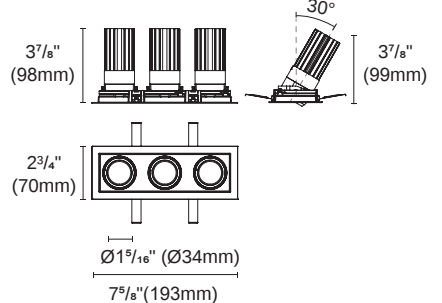

Cut out : 2¹³/₃₂"x7¹/₈" (61x181mm)


Accessories

ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass


STARLUX-FLAT-STLA

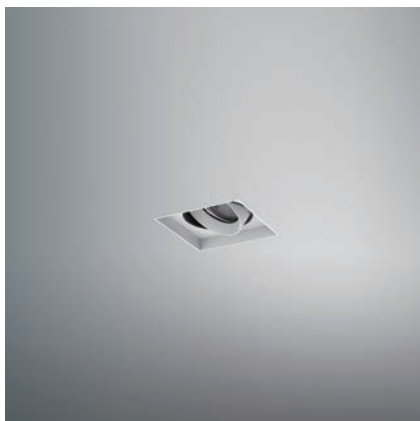

Article number	2314.400-1-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1385 (lm)	1171 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------



Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


STARLUX-FLAT-2-STLA



Article number	2314.400-2-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	28W	19W
Current	300 (mA)X2	450 (mA)
Delivered Lumen	1385 (lm)X2	2126 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP20A-1WMC	

**Dimmable**

TRIAC	1-10V
-------	-------

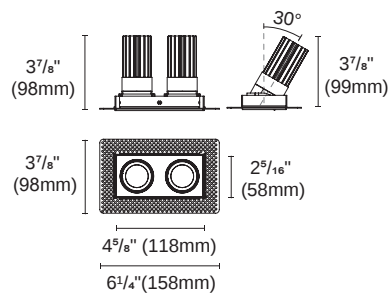

Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)


STARLUX-FLAT-3-STLA



Article number	2314.400-3-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	42W	26W
Current	300 (mA)X3	650 (mA)
Delivered Lumen	1385 (lm)X3	3087 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP40A-1WMC-850	

**Dimmable**

TRIAC	1-10V
-------	-------

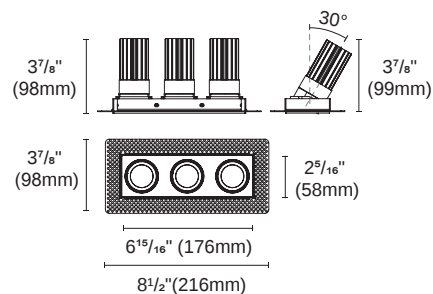

Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass


STARLUX-EYE-STLA



Article number	2314.401-1-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	14W	12W
Current	300 (mA)	250 (mA)
Delivered Lumen	1385 (lm)	1148 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	

**Dimmable**

TRIAC	1-10V
-------	-------




Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


STARLUX-EYE-2-STLA



Article number	2314.401-2-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	28W	19W
Current	300 (mA)X2	450 (mA)
Delivered Lumen	1385 (lm)X2	2090 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP20A-1WMC	

**Dimmable**

TRIAC	1-10V
-------	-------

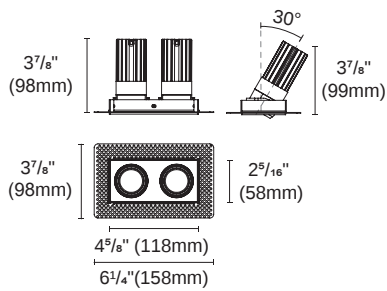


Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)


STARLUX-EYE-3-STLA



Article number	2314.401-3-LEA-33A-HE	
	NON-IC	IC
Fixture Consumption	42W	26W
Current	300 (mA)X3	650 (mA)
Delivered Lumen	1385 (lm)X3	3027 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	EULP10AT-1WPC-WS	
(IC)	PUP40A-1WMC-850	

**Dimmable**

TRIAC	1-10V
-------	-------

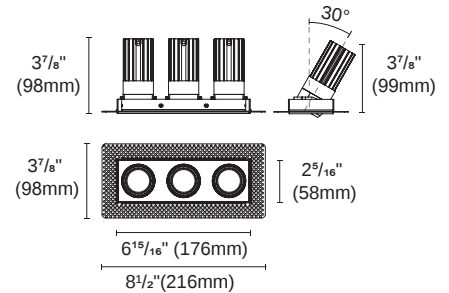

Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)

Accessories


ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass



INSTALLATION OPTIONS

for NON-IC



ACCG-42B-EULP10AT-1WPC-WS

0/1-10V , TRIAC
for STARLUX
Type: Gear box

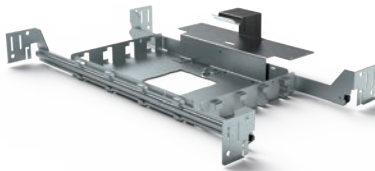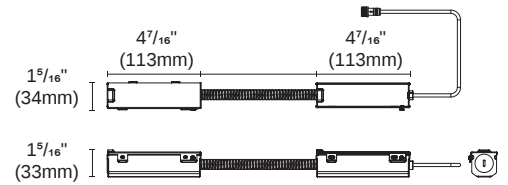



* Cutout accessories are available for different cutout dimensions

ACCH-13H-S61

for STARLUX square
Type: New construction plate

Cut out:

Square : $\square 2^{13/32}$ " ($\square 61\text{mm}$)

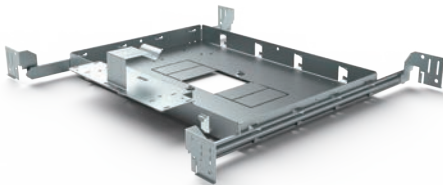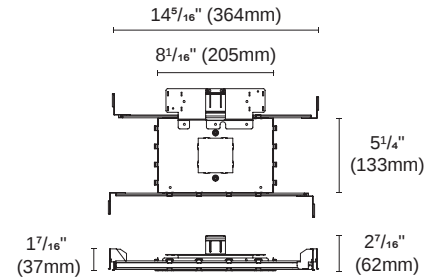



* Cutout accessories are available for different cutout dimensions

ACCH-12M-61X181

for STARLUX Multiple
Type: New construction plate

Cut out:

1 T/TL : $\square 2^{13/32}$ " ($\square 61\text{mm}$)

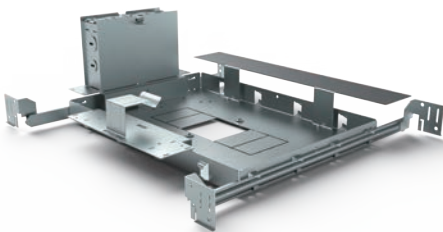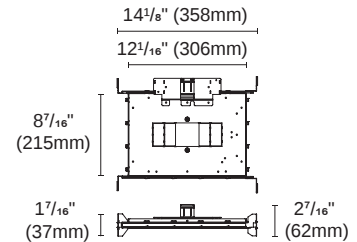


* Cutout accessories are available for different cutout dimensions

ACCH-12M-61X181-EM


for STARLUX Multiple
Type: Non-IC tray for emergency lighting

Cut out:

1 T/TL : $\square 2^{13/32}$ " ($\square 61\text{mm}$)

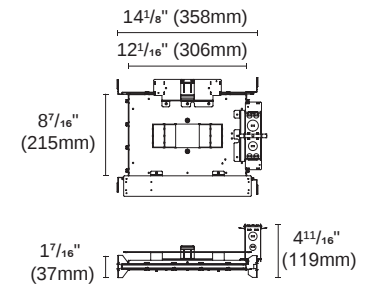

Cutout accessories



ACCI-10-R54-R60

for STARLUX round

Cut out:


Trim : $2^{4/32}$ " (54mm)

Trimless : $2^{12/32}$ " (60mm)





ACCG-30B-2-EULP10AT-1WPC-WS

0/1-10V , TRIAC
for STARLUX Multiple 2T
Type: Gear box

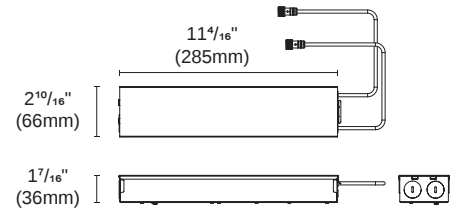

ACCG-30B-3-EULP10AT-1WPC-WS

0/1-10V , TRIAC
for STARLUX Multiple 3T
Type: Gear box

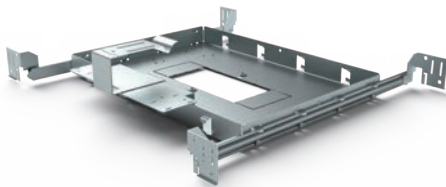
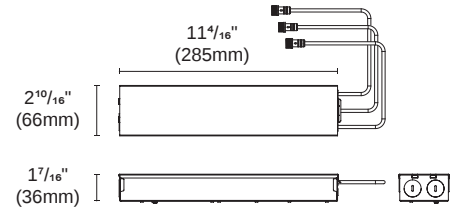


ACCCH-12L-61X181

for STARLUX Multiple
Type: New construction plate

Cut out:

- 2 T/TL : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)
- 3 T/TL : 2¹³/₃₂"x4²⁴/₃₂" (61x181mm)

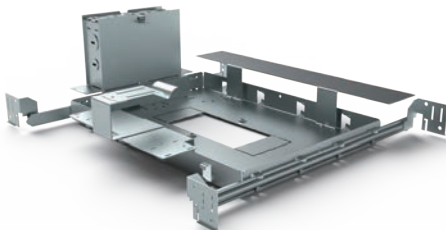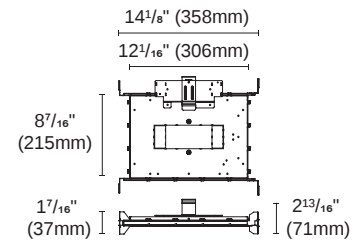


ACCCH-12L-61X181-EM

for STARLUX Multiple
Type: Non-IC tray for emergency lighting


Cut out:

- 2 T/TL : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)
- 3 T/TL : 2¹³/₃₂"x4²⁴/₃₂" (61x181mm)

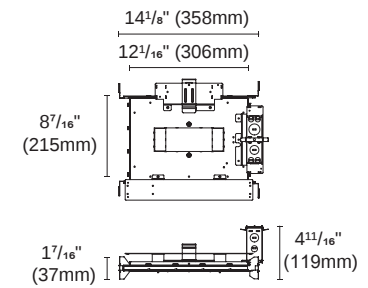

INSTALLATION OPTIONS

for IC BOX

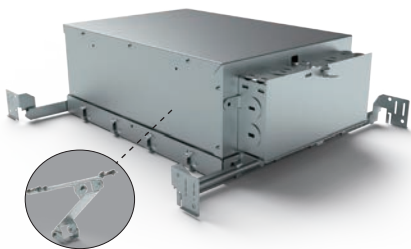

Driver is secured on patent designed bracket

* Cutout accessories are available for different cutout dimensions

ACCH-12D-S61-EULP10AT-1WPC-WS 0/1-10V , TRIAC


for STARLUX square

Type: IC Box


Cut out:

Round : $\varnothing 2^{12}/_{32}$ " ($\varnothing 60$ mm)

Square : $\square 2^{12}/_{32}$ " ($\square 60$ mm)



Cutout accessories



ACCI-10-R54-R60

for STARLUX round

Cut out:

Trim : $2^4/_{32}$ " (54mm)

Trimless : $2^{12}/_{32}$ " (60mm)



ACCH-12B-61X121-PUP20A-1WMC


0/1-10V , TRIAC

for STARLUX Multiple 2T

Type: IC Box

Cut out:

2 T/TL : $2^{13}/_{32}$ "x $4^{24}/_{32}$ " (61x121mm)



ACCH-7G-61X181-PUP40A-1WMC-850


0/1-10V , TRIAC

for STARLUX Multiple 3T

Type: IC Box

Cut out:


3 T/TL : $2^{13}/_{32}$ "x $4^{24}/_{32}$ " (61x181mm)

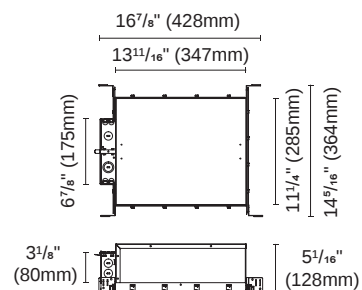



ACCI-3

Type: Emergency battery holder
For BillDa emergency led driver-
Model NO. BLD-HM08D-YYY

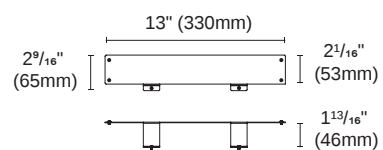

ACCI-1

Type: Junction box

