

STARLUX SERIES (AM-C.C.)



STARLUX (AM)

Discover the "Starlux" - The Ultimate Lighting Solution!

- Versatile design
- Easy installation
- Modular and customizable
- Non-glare technology
- Low maintenance
- Transform any space

Upgrade your lighting game with the STARLUX. Experience its versatility, easy installation, and customizable features. Say goodbye to glare and enjoy a low-maintenance lighting solution. Transform your space into a well-lit haven today!
Illuminate your world with the STARLUX.

Shape
(Baffle Size)




Round
1.5"



Square
1.5"



2 lamp
1.5"



3 lamp
1.5"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable

STARLUX-1.5"


recessed downlights




LEA-09B
10W



LEA-09B-DW
Dim to warm



Flat
Adjustable



Eye
Adjustable

Round

Trim



Trimless



Square

Trim



Trimless



Multiple lights

2 Lamp
Trim



2 Lamp
Trimless



3 Lamp
Trim



3 Lamp
Trimless





STARLUX-1.5"

RISE's STARLUX-1.5" deliver high lumens to your spaces while remaining fully workable from below the ceiling plane.

FEATURES


- STARLUX-1.5" downlight offer a tiny new form element for a minutest downlight artistic.
- Micro trim style is well suited with sheetrock, ACT, wood/ millwork, and many other ceiling materials
- Industry leading luminescence and craftsmanship



Constant current

1 to multiple fixtures

Rise's STARLUX 1.5" are compatible with all common lighting controls; choose from Traic, 0-10V dimming.

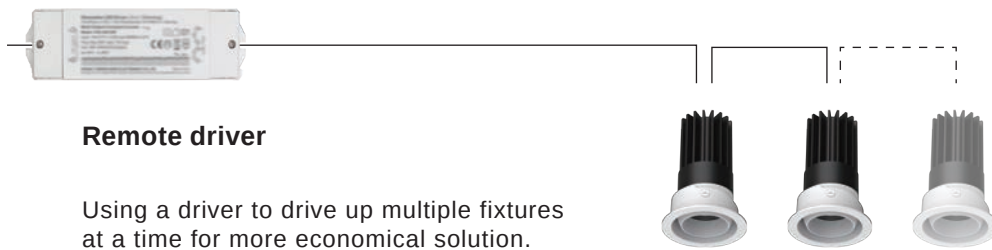


Driver Storage

***Recommended Installation* :**
Drivers can be stored into maintenance hole of the enclosure for easy access.


Size : 20" x 16" x H:3.94"

Max circuit length 1181 $\frac{1}{8}$ "(30M) with wire gauge 12AWG.


Please refer to the last page of the Starlux series catalog to purchase drivers.



NON-IC

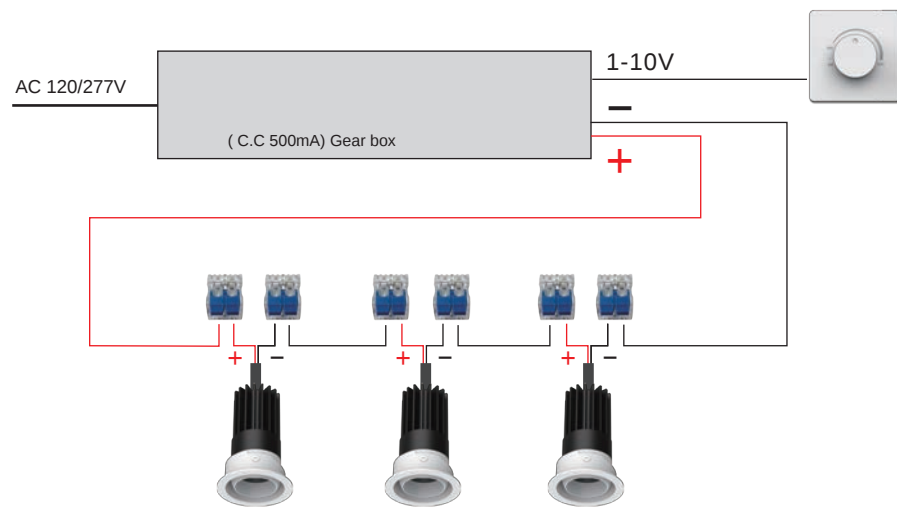

IC-BOX

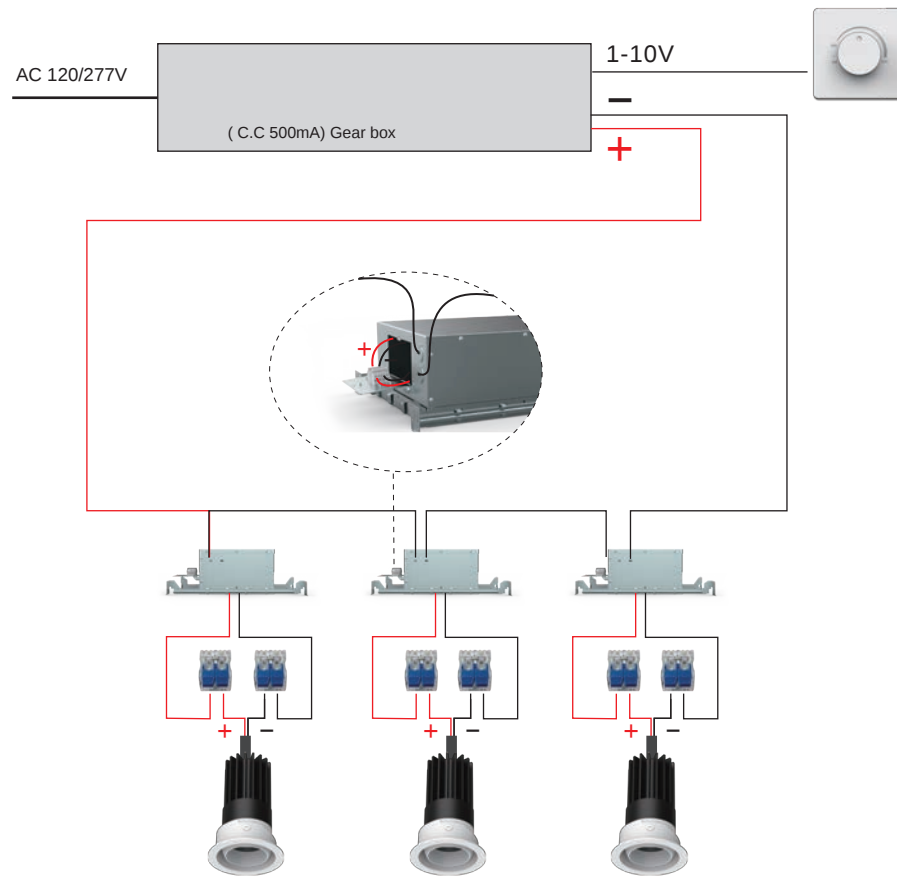

STARLUX-1.5" round
adjustable




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

DALI, TRIAC, 1-10V

Types



Colours

- Bezel :  
Black White
- Baffle :  
Black White

Beam Angle



15°/24°/36°/50° (Lens)

AT VOI
WE ARE ON A MISSION
TO MAKE OTHER PEOPLE AS PA
ABOUT GREAT ARTISAN CO
AS WE ARE


IONATE




STARLUX-FLAT-RTA



Article number	2218.510-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	774 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

**Dimmable**


⌀ Cut out : 2 1/32" (54mm)

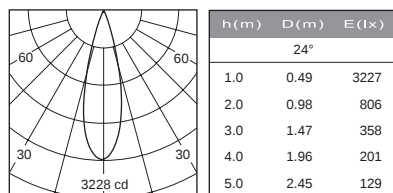


STARLUX-EYE-RTA



Article number	2218.511-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

**Dimmable**

⌀ Cut out : 2 1/32" (54mm)

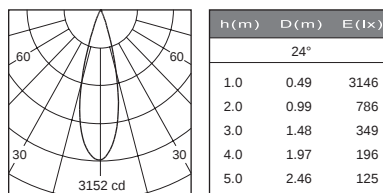**Accessories**

ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass


STARLUX-FLAT-RTLA



Article number	2218.240F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	774 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

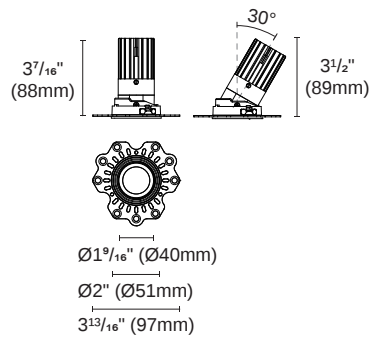**Dimmable**


⌀ Cut out : 2 12/32" (60mm)

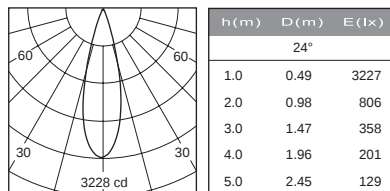


STARLUX-EYE-RTLA



Article number	2218.241F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

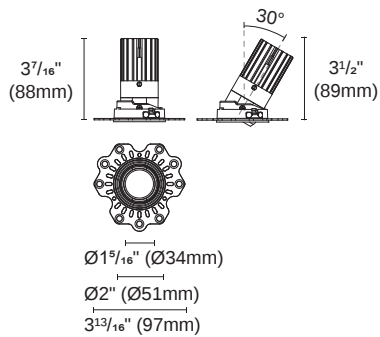**Dimmable**

⌀ Cut out : 2 12/32" (60mm)

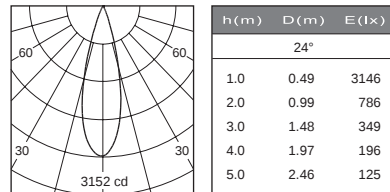**Accessories**

ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass

STARLUX-1.5" Multiple lights
adjustable



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

DALI, TRIAC, 1-10V

Types

	1 lamp	2 lamp	3 lamp
Trim			
	□2.76" (□70mm)	5.28" (134mm)	7.6" (193mm)

Colours

Bezel :		
	Black	White
Baffle :		
	Black	White

Beam Angle




15°/24°/36°/50° (Lens)





Ближе к
Пуща. Речу


STARLUX-FLAT-STA

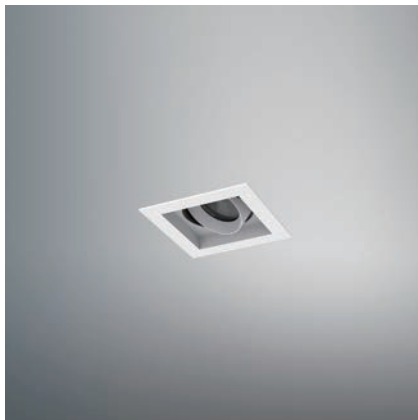

Article number	2214.411-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	711 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

**Dimmable**


Cut out : 2^{13/32}"x2^{13/32}" (61x61mm)

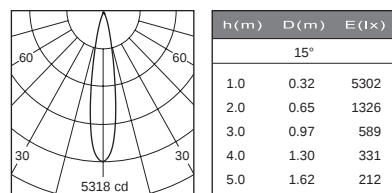


STARLUX-FLAT-2-STA



Article number	2214.411-2-LEA-09B	
	NON-IC	IC
Fixture Consumption	20W	-
Current	500 (mA)	400 (mA)
Delivered Lumen	711 (lm) X2	623 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	

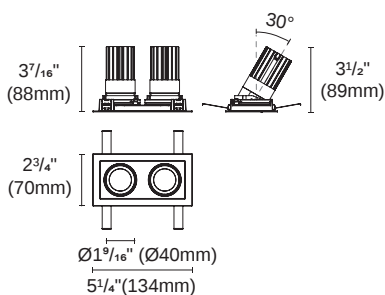**Dimmable**


Cut out : 2^{13/32}"x4^{3/4}" (61x121mm)

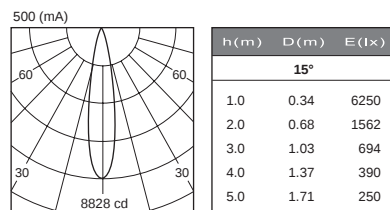

STARLUX-FLAT-3-STA



Article number	2214.411-3-LEA-09B	
	NON-IC	IC
Fixture Consumption	30W	22W
Current	500 (mA)	400 (mA)
Delivered Lumen	711 (lm) X3	623 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	

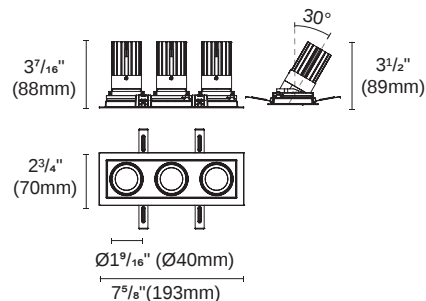**Dimmable**

Cut out : 2^{13/32}"x7^{1/8}" (61x181mm)


Accessories

ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass


STARLUX-EYE-STA

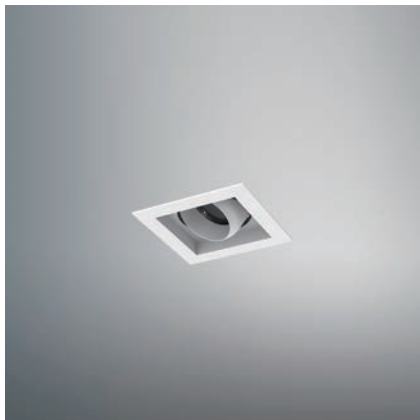

Article number	2214.412-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	757 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

**Dimmable**



Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)

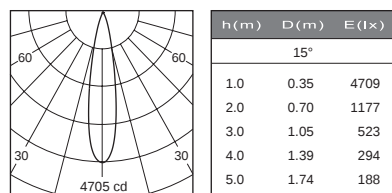


STARLUX-EYE-2-STA



Article number	2214.412-2-LEA-09B	
	NON-IC	IC
Fixture Consumption	20W	-
Current	500 (mA)	400 (mA)
Delivered Lumen	757 (lm)X2	603 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	

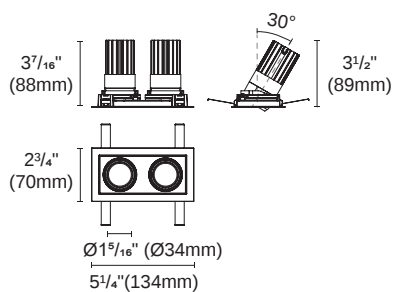**Dimmable**


Cut out : 2¹³/₃₂"x4³/₄" (61x121mm)

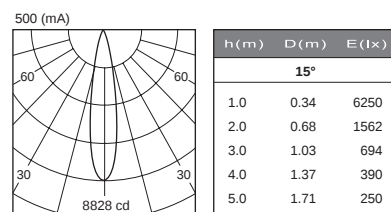

STARLUX-EYE-3-STA



Article number	2214.412-3-LEA-09B	
	NON-IC	IC
Fixture Consumption	30W	22W
Current	500 (mA)	400 (mA)
Delivered Lumen	757 (lm)X3	603 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	

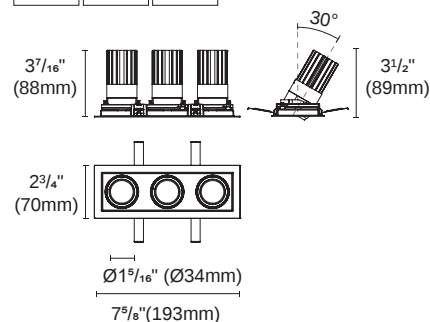**Dimmable**

Cut out : 2¹³/₃₂"x7¹/₈" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass


STARLUX-FLAT-STLA



Article number	2314.400-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	711 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

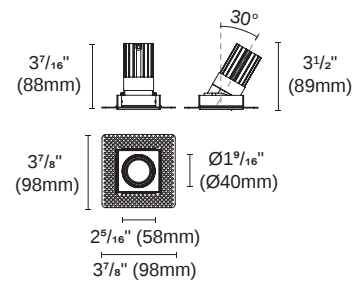**Dimmable**


Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)

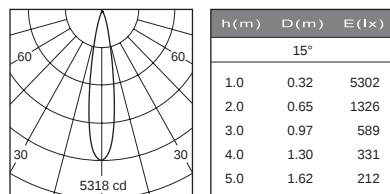


STARLUX-FLAT-2-STLA



Article number	2314.400-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X2 623 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

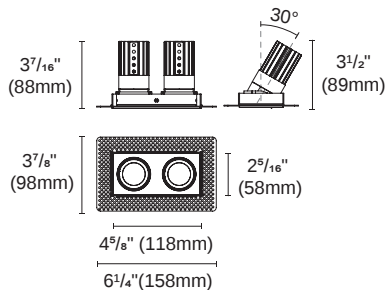**Dimmable**


Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)

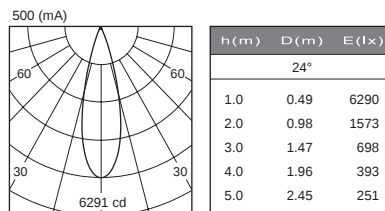

STARLUX-FLAT-3-STLA



Article number	2314.400-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X3 623 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

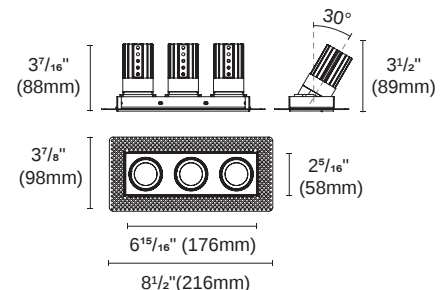**Dimmable**

Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass


STARLUX-EYE-STLA



Article number	2314.401-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	757 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

**Dimmable**



Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)

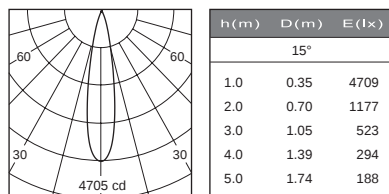


STARLUX-EYE-2-STLA



Article number	2314.401-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X2 603 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

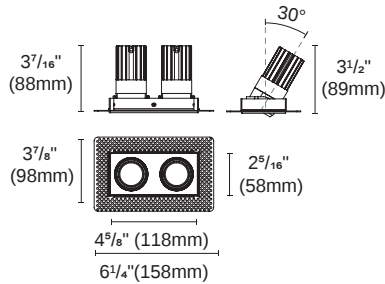**Dimmable**


Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)

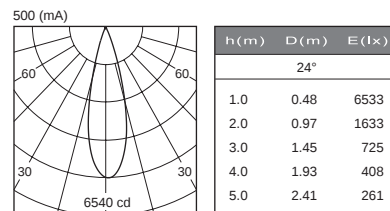

STARLUX-EYE-3-STLA



Article number	2314.401-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X3 603 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

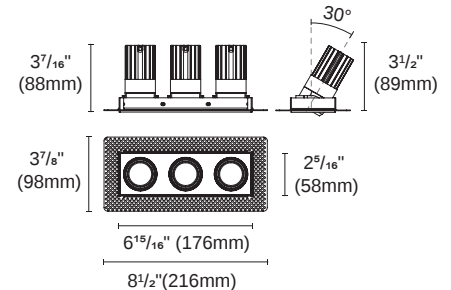**Dimmable**

Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass

INSTALLATION OPTIONS





KIG-040-DWJ

Triac/Phase , 0-10V , 1-10V , Potentiometer ,
10V PWM 5 in 1 dimming

40W , 1-3T

Type: Gear box

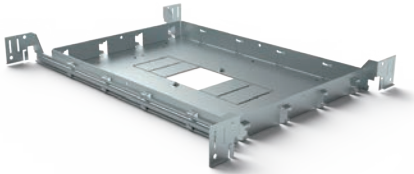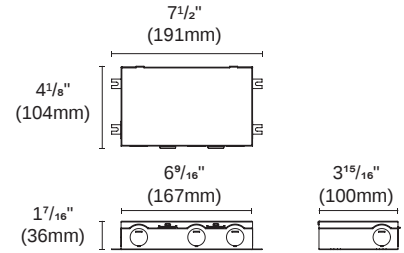


ACCH-12-61X181

for STARLUX Multiple both trim & trimless

Type: New construction plate

Cut out:

- 1 T/TL : $2^{13}/_{32}$ "x $2^{13}/_{32}$ " (61x61mm)
- 2 T/TL : $2^{13}/_{32}$ "x $4^{24}/_{32}$ " (61x121mm)
- 3 T/TL : $2^{13}/_{32}$ "x $7^{4}/_{32}$ " (61x181mm)



* Cutout accessories are available for different cutout dimensions




ACCH-12G-61X181

for STARLUX Multiple both trim & trimless

Type: IC Box


Cut out:

- 1 T/TL : $2^{13}/_{32}$ "x $2^{13}/_{32}$ " (61x61mm)
- 2 T/TL : $2^{13}/_{32}$ "x $4^{24}/_{32}$ " (61x121mm)

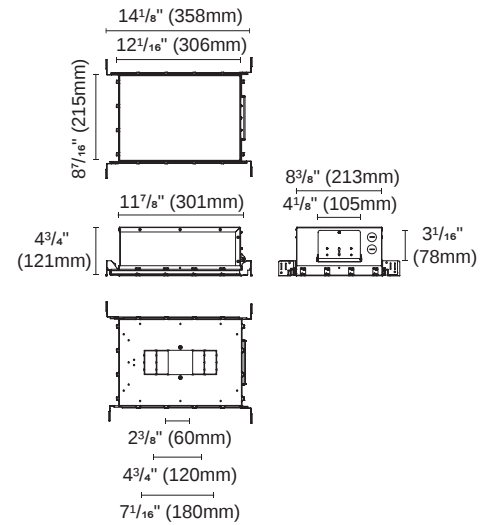

* Cutout accessories are available for different cutout dimensions

Cutout accessories



ACCI-10-R54-R60 for STARLUX round

Cut out:

Trim : $2^{4}/_{32}$ " (54mm)

Trimless : $2^{12}/_{32}$ " (60mm)




ACCH-3B-61X181

for STARLUX Multiple both trim & trimless

Type: IC Box

Cut out:

3 T/TL : $2^{13}/_{32}$ "x $7^{1}/_{8}$ " (61x181mm)

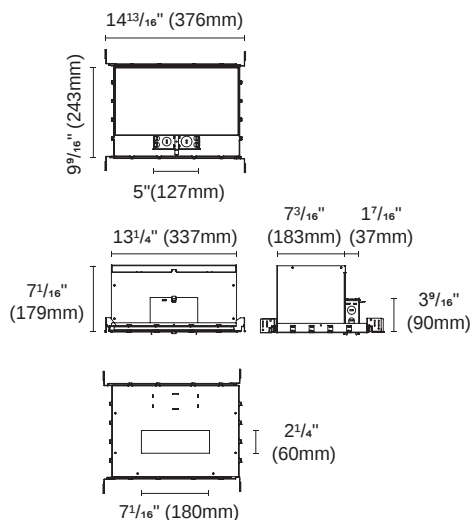

Optional driver available



KIG-040-DW

Type: Driver

Triac / 0-10V/1-10V/Potentiometer/10V
PWM 5 in 1 Dimmable LED driver
Multi-current output series 40W
For 1~3T



PUP10A-1WMC-700

Type: Driver

0/1-10V
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20A-1WMC

Type: Driver

0/1-10V
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10T-1LMC-700

Type: Driver

Triac
Output: 500mA/2-20VDC/10W
400mA/2-21VDC/8.4W
For 1T



PUP20T-1LMC

Type: Driver

Triac
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10D-1WMC-700

Type: Driver

Dali
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20D-1WMC

Type: Driver

Dali
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



ACOT-106

Type: Quick connector