

EPIC SERIES (AM)



EPIC (AM)

Designed base on the concept of "light engine modularization", making EPIC series possible to be more flexible, more practical and expandable.

The features are as follows:

- * Modularized design—easy maintenance & replacement
- * Maximize common components to reduce stock cost
- * Speed up the progress of new series development in the future
- * Interchangeable design to increase product flexibility
- * Set up design norms by modularization, minimize possible faults

Shape (Baffle size)

			
Round 2"	Round 2.8"	Round 3.5"	Round 4.5"
			
Square 2"	Square 2.8"	Square 3.5"	Square 4.5"

Mountings

		
Recessed Trim	Recessed Trimless	Millwork

Light distributions

		
Fixed	Adjustable	Wallwash

EPIC
recessed downlights



LEA-13



LEA-14



LEA-14-DW
Dim To Warm
(ETL pending)

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable	85 Wallwash
Round					
Trim					
Trimless					
Millwork					
Square					
Trim					
Trimless					
Millwork					




LEA-15



LEA-15-DW
Dim To Warm




ACOT-84-AM



ACOT-73-AM

	110 Fixed	110 Adjustable	110 Wallwash	135 Fixed	135 Adjustable	135 Wallwash
Round						
Trim						
Trimless						
Millwork						
Square						
Trim						
Trimless						
Millwork						


EPIC (AM)



Accessories
Diffusion sheet
Striped glass
Woven glass
Honeycomb louver




Round or Square
Fixed
Adjustable 0°-30°
Wallwash(Ø85,Ø110,Ø135)



Material
Aluminum die cast




Round or Square
Trim or Trimless
Mill work





Light distributions

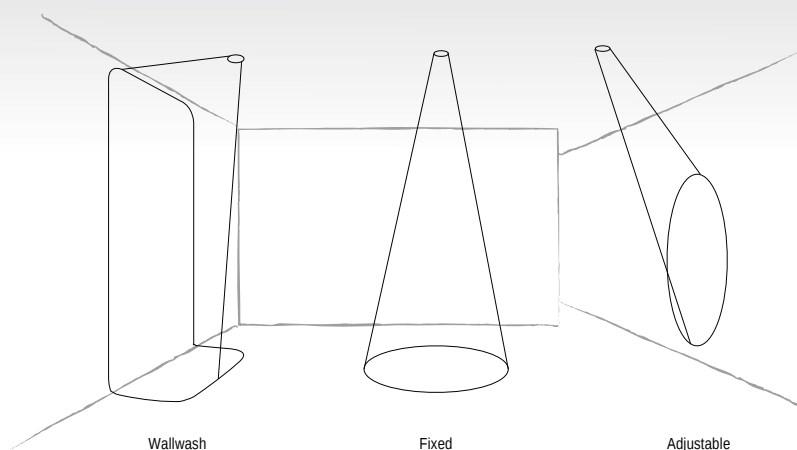Three light patterns to meet all the essential functions of your lighting concept Vertical lighting is provided by downlights with different beam angles; wall-wash and floor-mounted optics provide a wide range of wall and floor lighting; adjustable spotlight settings . If the functional area changes, the optics in the luminaire housing can be easily replaced without tools.




Wallwash

Fixed



Adjustable

Easy installation

Easy to replace, quick to assemble and completely tool-free.




Colorful

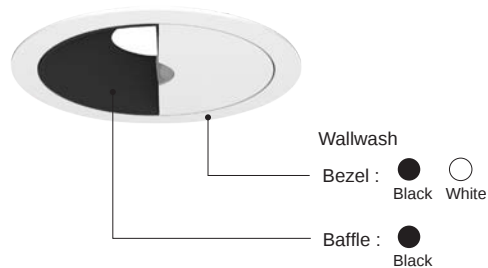
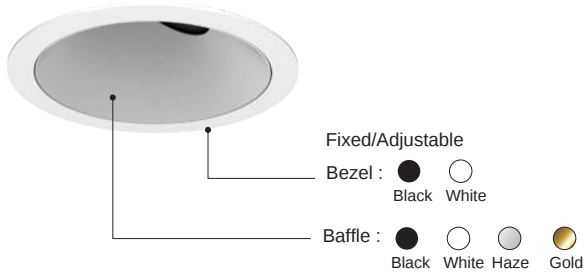


Low glare baffle

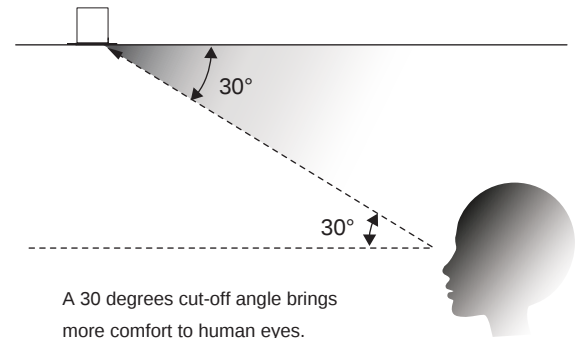
Design with 30° cut-off angle, this series ensures the low glare function that able to create a soft visual effect.




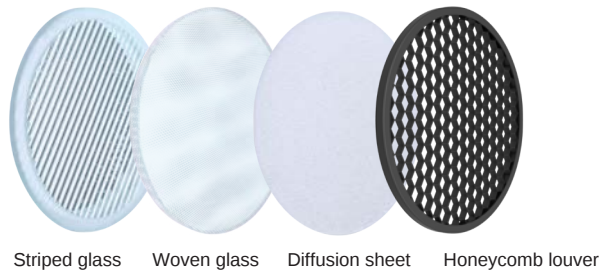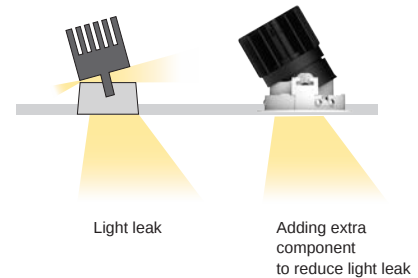Adding an extra component to the fixture prevent people seeing through the fixture a very tender thought from our designer



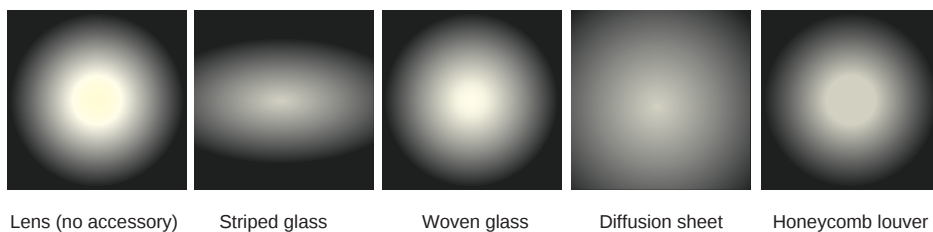
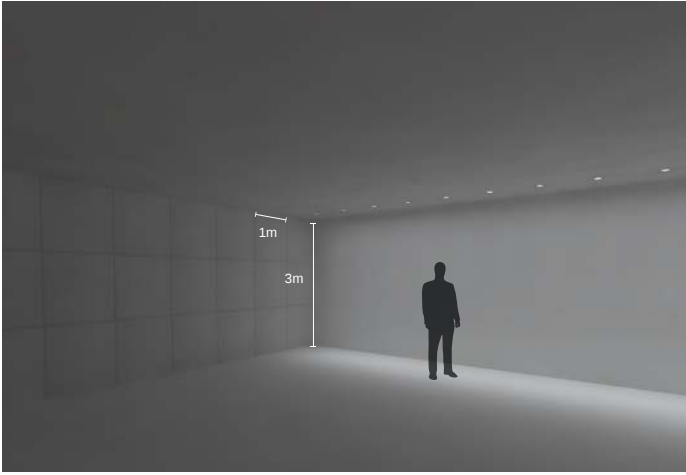
With more options to the accessories, EPIC adds more flexibility and freedom for the lighting designer. Honeycomb reduces glare; strip glass creates oval distribution; diffusion sheet & woven glass soften and even spread the light.





Wallwash

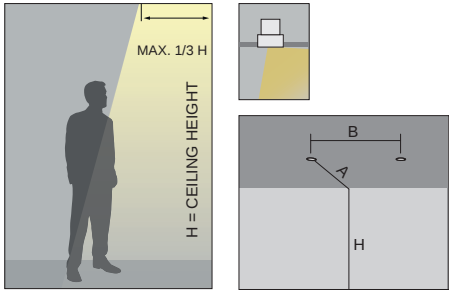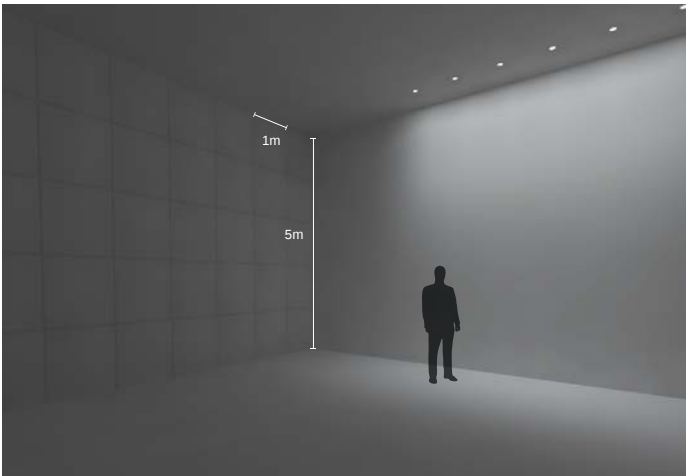EPIC a wallwash enables even illumination on the target wall without shadows. It supplies an overall effect that is clean and elegant. Generally speaking, the distance between the lighting fixture and the height of the illuminated wall ranges from 1/3 to 1/5. This wallwash function; not only broadens the illumination effect with smooth lights performance but also makes the entire area feels brighter. When combining with other function fixtures together, it can form a fusion of beauty.




RECOMMENDED DISTANCES (Meter)	EPIC 2.8"	A : H : B	0.75 : 3 : 0.75 (m)
	EPIC 3.5"	A : H : B	0.75 : 5 : 0.75 (m)
	EPIC 4.5"	A : H : B	0.75 : 5 : 0.75 (m)



Dim to Warm 1800-3000K (for EPIC 110)

This light engine features Dim to Warm, the ultimate in dimming comfort, where the light changes its colour temperature according to the dimming curve; the darker the light, the warmer the light. Like a sunset effect, the gradual change replicates the transition from a comfortable ambience to a relaxing and soothing environment. Dim to Warm is the term used to describe the function of LEDs to reduce the colour temperature (CCT) of the light as it dims, from 3000K at 100% to 1800K at nearly 0%. The light provides a relaxing ambience for a typical evening dining experience, reading in bed, a moody hotel lobby or bar environment. By moving from dim to warm, we provide a light source that is alert and bright when cooking or working, then dimmed to provide a warm ambience for hosting and relaxing in the evening.

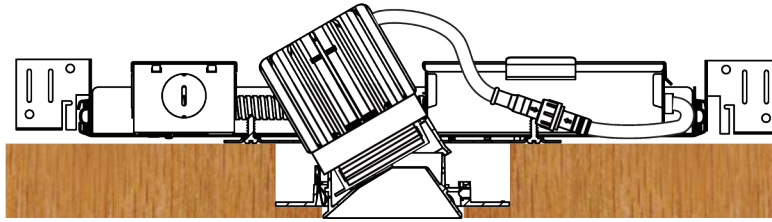EPIC 65/85/110/135
recessed downlights



Wood Ceiling Style







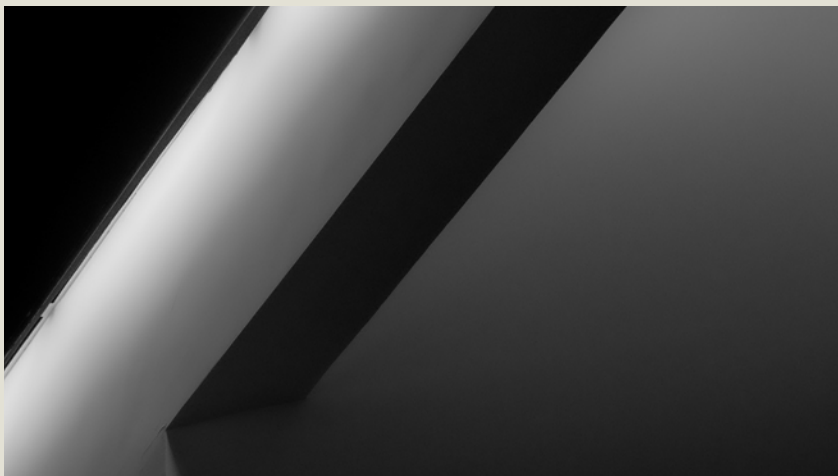


B GALLERY

B GALLERY







EPIC-65

2"



Round / Square

Fixed
Adjustable


EPIC-65-RTF



Article number	2118.137-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
HE Delivered Lumen*	903 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**

Cut out : 2 12/32" (60mm)





h(m)	D(m)	E(lx)
	20°	
1.0	0.36	4633
2.0	0.72	1158
3.0	1.08	514
4.0	1.44	289
5.0	1.80	185


EPIC-65-RTA




Article number	2118.138-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
HE Delivered Lumen*	905 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**


Cut out : 2 12/32" (60mm)





h(m)	D(m)	E(lx)
	20°	
1.0	0.35	4878
2.0	0.69	1220
3.0	1.04	542
4.0	1.38	304
5.0	1.73	195

AccessoriesACSG-5
Striped PC sheetACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup

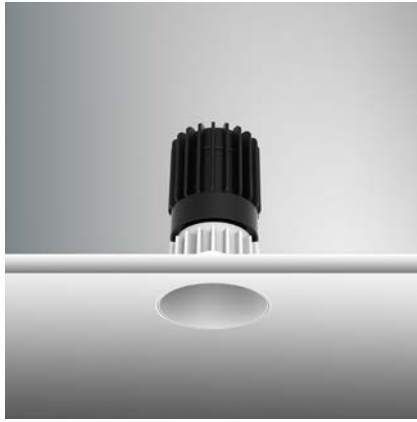
EPIC-65-RTL




Article number	2118.237F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
HE Delivered Lumen*	903 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**


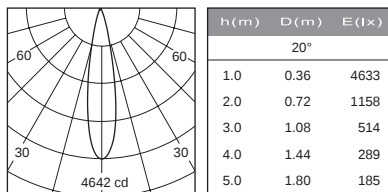
⌀ Cut out : 2 12/32" (60mm)




EPIC-65-RTLA

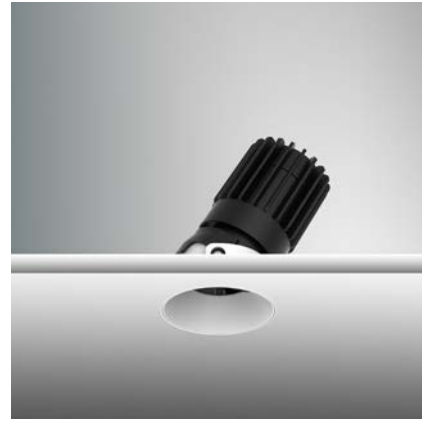


Article number	2118.238F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
HE Delivered Lumen*	905 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

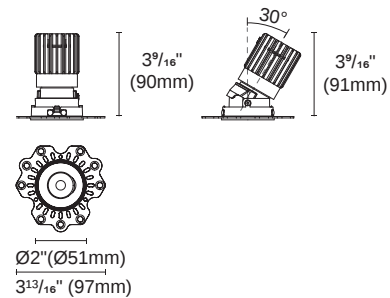**Dimmable**



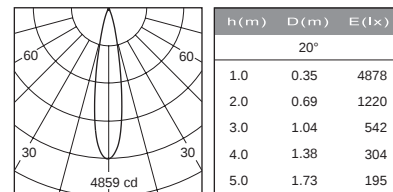
⌀ Cut out : 2 12/32" (60mm)

**Accessories**ACSG-5
Striped PC sheetACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup

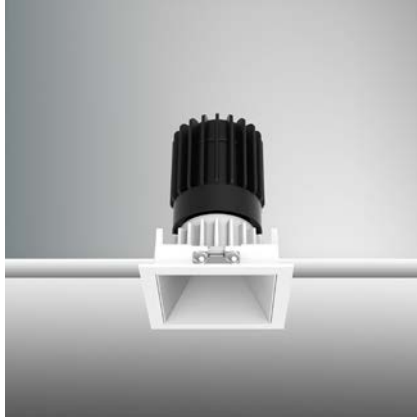
EPIC-65-STF




Article number	2118.140-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
HE Delivered Lumen*	939 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



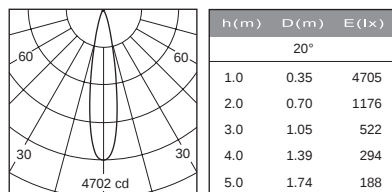
Cut out : 2 12/32"X2 12/32" (60X60mm)





EPIC-65-STA

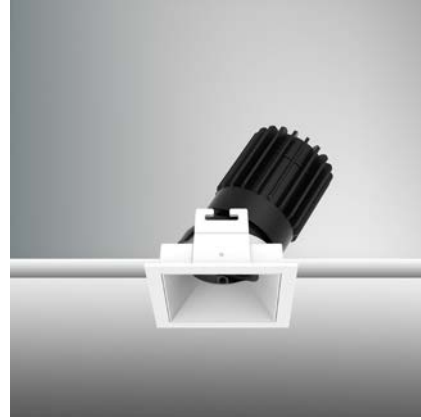


Article number	2118.141-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
HE Delivered Lumen*	890 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**

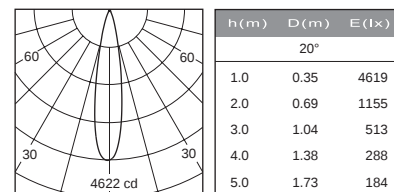

Cut out : 2 12/32"X2 12/32" (60X60mm)

**Accessories**ACSG-5
Striped PC sheetACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup

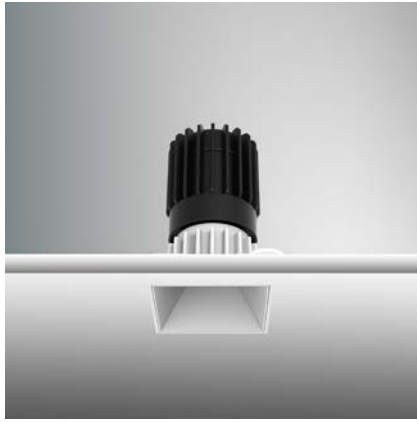
EPIC-65-STLF




Article number	2118.240A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
HE Delivered Lumen*	939 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



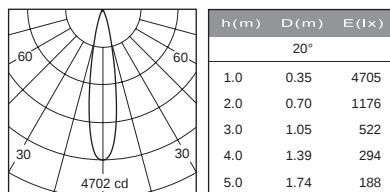
Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)





EPIC-65-STLA

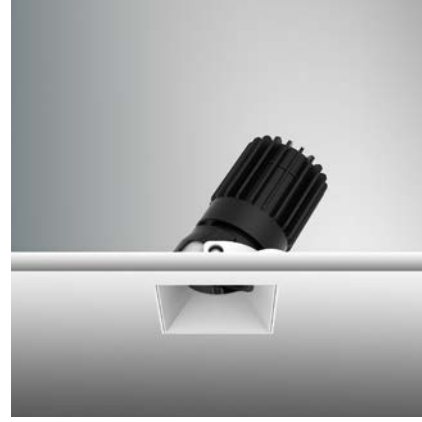


Article number	2118.241A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
HE Delivered Lumen*	890 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

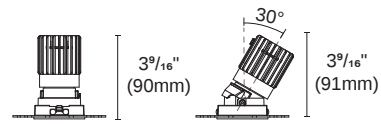**Dimmable**

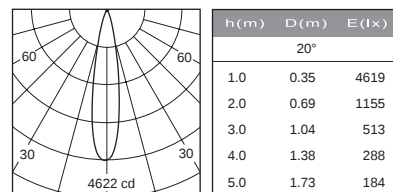Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)

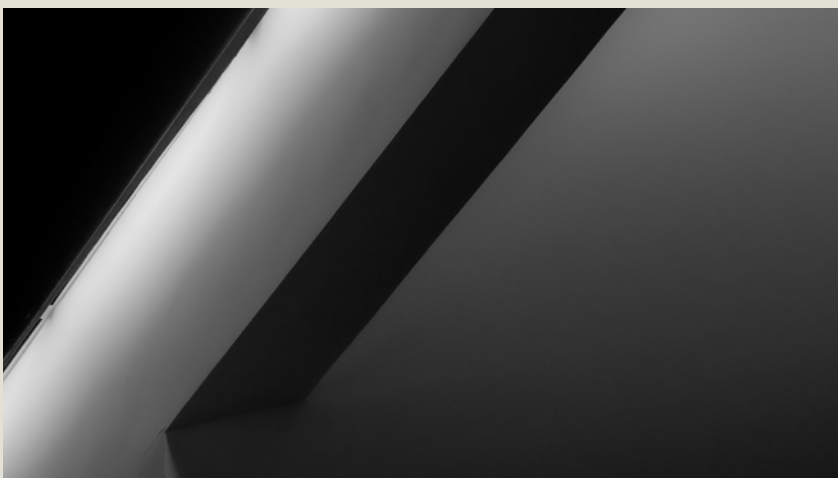**Accessories**ACSG-5
Striped PC sheetACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup





EPIC-85

2.8"



Round / Square

Fixed
Adjustable
Wallwash

EPIC-85-RTF



Article number	2118.125-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
HE Delivered Lumen*	1702 (lm)	1538 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.125-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	836 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⌀ Cut out : 3 5/32" (80mm)

AccessoriesACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

EPIC-85-RTA



Article number	2118.126-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
HE Delivered Lumen*	1687 (lm)	1495 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.126-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	809 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**

⌀ Cut out : 3 5/32" (80mm)


EPIC-85-RTW



Article number	2118.127-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
HE Delivered Lumen*	1066 (lm)	1062 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.127-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	618 (lm)	
Beam Angle	Wallwash (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




*Wallwash lens —
best optical matching angle: 15°

Dimmable



⌀ Cut out : 3 5/32" (80mm)

Accessories are not suitable for wallwash fixtures

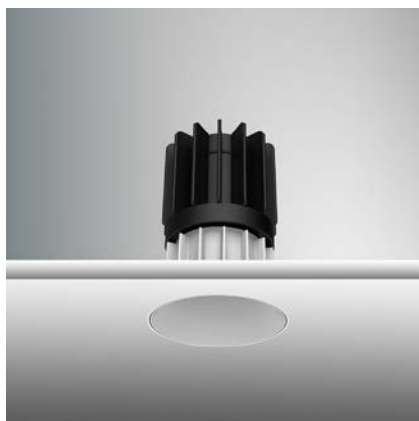EPIC-85-RTL F



Article number	2118.225F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
HE Delivered Lumen*	1702 (lm)	1538 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.225F-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	836 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⊖ Cut out : 3 5/32" (80mm)

AccessoriesACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupEP85-TL-WD
Millwork

EPIC-85-RTL A




Article number	2118.226F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
HE Delivered Lumen*	1687 (lm)	1495 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.226F-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	809 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

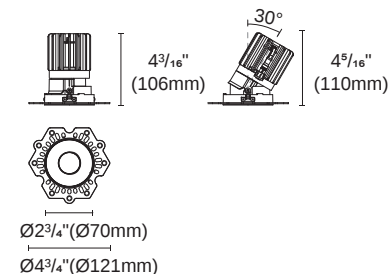**Dimmable**



⊖ Cut out : 3 5/32" (80mm)

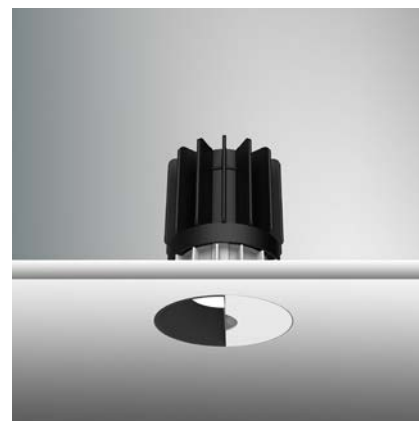EPIC-85-RTL W



Article number	2118.227F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
HE Delivered Lumen*	1066 (lm)	1062 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.227F-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	618 (lm)	
Beam Angle	Wallwash (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

*Wallwash lens — best optical matching angle: 15°

**Dimmable**



⊖ Cut out : 3 5/32" (80mm)

Accessories are not suitable for wallwash fixtures

EPIC-85-STF



Article number	2118.128-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
HE Delivered Lumen*	1717 (lm)	1543 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.128-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	835 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3 5/32"X3 5/32" (80X80mm)

AccessoriesACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

EPIC-85-STA



Article number	2118.129-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
HE Delivered Lumen*	1696 (lm)	1520 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.129-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	834 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3 5/32"X3 5/32" (80X80mm)

EPIC-85-STW



Article number	2118.130-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
HE Delivered Lumen*	1083 (lm)	1048 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.130-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	634 (lm)	
Beam Angle	Wallwash (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


*Wallwash lens — best optical matching angle: 15°

**Dimmable**



Cut out : 3 5/32"X3 5/32" (80X80mm)

Accessories are not suitable for wallwash fixtures

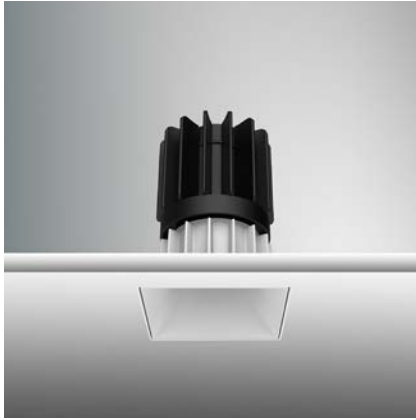EPIC-85-STLF



Article number	2118.228A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
HE Delivered Lumen*	1717 (lm)	1543 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.228A-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	835 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3 5/32"X3 5/32" (80X80mm)

AccessoriesACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupEP85-TL-WD
Millwork

EPIC-85-STLA




Article number	2118.229A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
HE Delivered Lumen*	1696 (lm)	1520 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.229A-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	834 (lm)	
Beam Angle	25°/30°/36°/50° (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

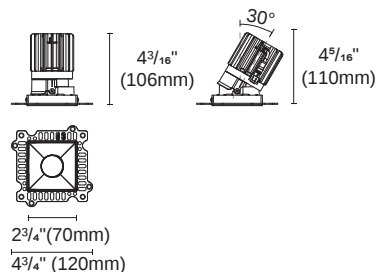**Dimmable**



Cut out : 3 5/32"X3 5/32" (80X80mm)

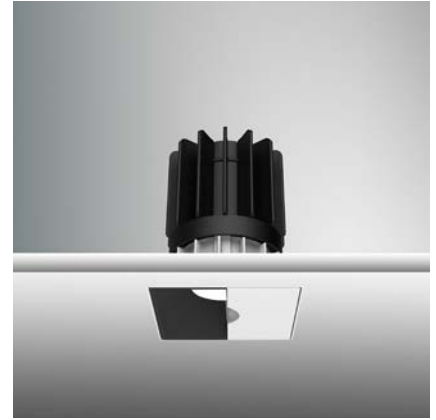EPIC-85-STLW



Article number	2118.230A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
HE Delivered Lumen*	1083 (lm)	1048 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	
Article number	2118.230A-LEA-14-DW	
Fixture Consumption	15W	
Current	350 (mA)	
Delivered Lumen	634 (lm)	
Beam Angle	Wallwash (Lens)	
CCT	1800-3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


*Wallwash lens — best optical matching angle: 15°

**Dimmable**

Cut out : 3 5/32"X3 5/32" (80X80mm)

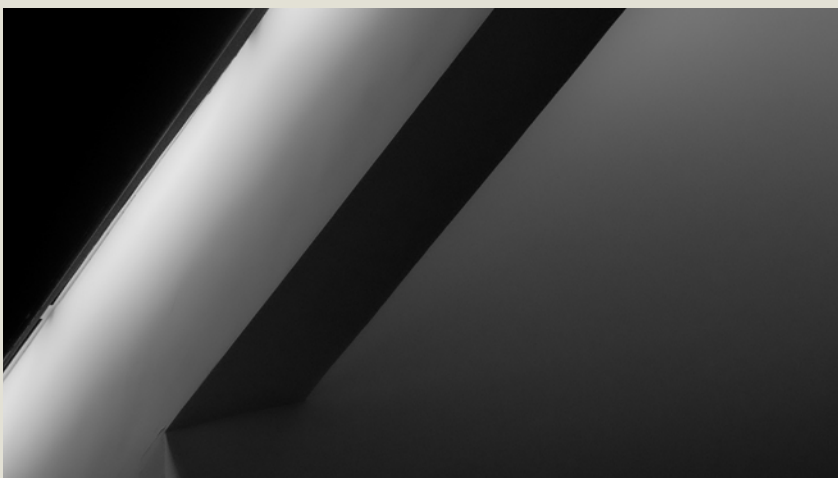Accessories are not suitable for wallwash fixtures





EPIC-110 ▶

3.5"

Round / Square

Fixed
Adjustable
Wallwash

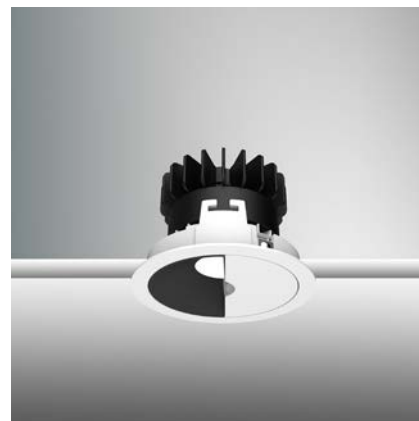
EPIC-110-RTF1



EPIC-110-RTA1




EPIC-110-RTW1



Article number	2018.481-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
HE Delivered Lumen*	2121 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC



Article number	2018.481-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)

Article number	2018.494-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
HE Delivered Lumen*	2127 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.494-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)

Article number	2018.482-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
HE Delivered Lumen*	1375 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.482-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

*Wallwash lens — best optical matching angle: 36°


**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)


AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

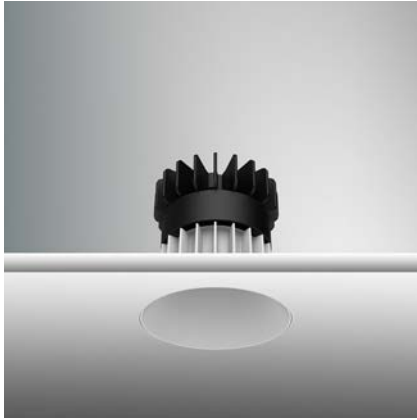
EPIC-110-RTL1F1



EPIC-110-RTLA1

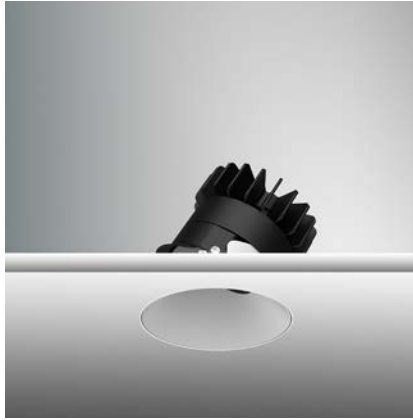


EPIC-110-RTLW1

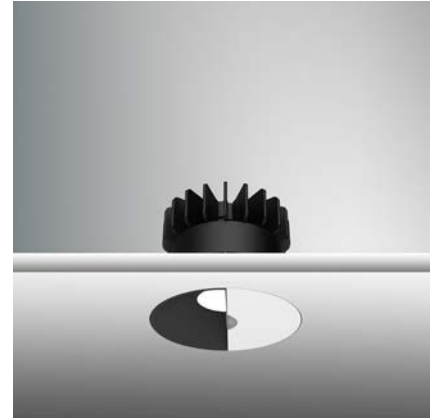

Article number	2018.275F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
HE Delivered Lumen*	2121 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC



Article number	2018.275F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

⌀ Cut out : 3^{30/32}" (100mm)

Article number	2018.294F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
HE Delivered Lumen*	2127 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.294F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



**Dimmable**

⌀ Cut out : 3^{30/32}" (100mm)

Article number	2018.276F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
HE Delivered Lumen*	1375 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.276F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

*Wallwash lens — best optical matching angle: 36°

**Dimmable**

⌀ Cut out : 3^{30/32}" (100mm)

AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures

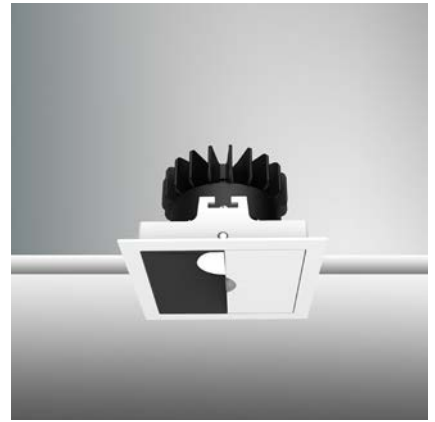
EPIC-110-STF1



EPIC-110-STA1




EPIC-110-STW1



Article number	2018.483-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
HE Delivered Lumen*	2048 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.483-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC


**Dimmable**

⚠ Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)

AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Article number	2018.495-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
HE Delivered Lumen*	2020 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.495-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC


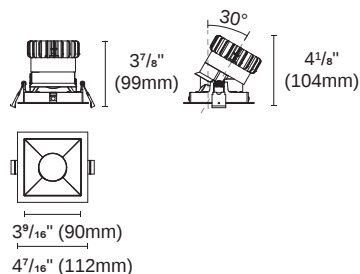
**Dimmable**

⚠ Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)

Article number	2018.484-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
HE Delivered Lumen*	1327 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.484-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC


*Wallwash lens — best optical matching angle: 36°

**Dimmable**

⚠ Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)


Accessories are not suitable for wallwash fixtures

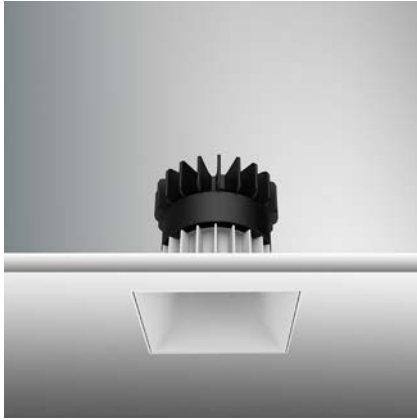EPIC-110-STLF1



Article number	2018.277A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
HE Delivered Lumen*	2048 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.277A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)



AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

EPIC-110-STLA1




Article number	2018.295A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
HE Delivered Lumen*	2020 (lm)
Beam Angle	20°/30°/45°/55°/65° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.295A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


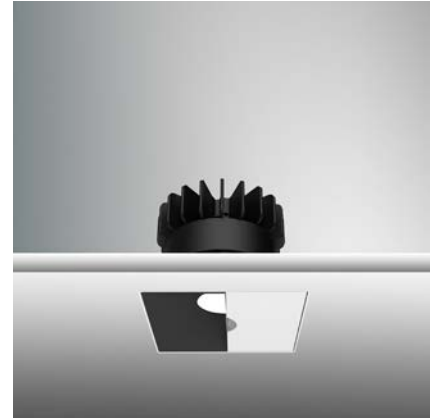
EPIC-110-STLW1



Article number	2018.278A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
HE Delivered Lumen*	1327 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.278A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

*Wallwash lens — best optical matching angle: 36°

**Dimmable**




Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories are not suitable for wallwash fixtures


EPIC-110-RTF



Article number	2018.481-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
HE Delivered Lumen*	2851 (lm)	2307 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**



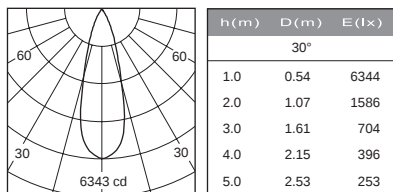
⌀ Cut out : 3³⁰/₃₂" (100mm)




EPIC-110-RTA



Article number	2018.494-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
HE Delivered Lumen*	2816 (lm)	2338 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**

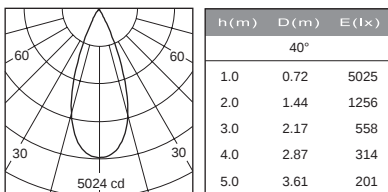⌀ Cut out : 3³⁰/₃₂" (100mm)






EPIC-110-RTW




Article number	2018.482-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
HE Delivered Lumen*	1886 (lm)	1480 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

*Wallwash lens — best optical matching angle: 36°


**Dimmable**

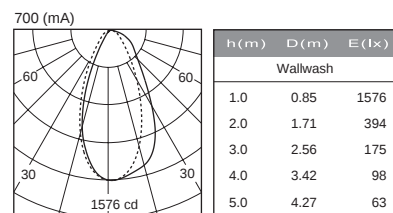⌀ Cut out : 3³⁰/₃₂" (100mm)



**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

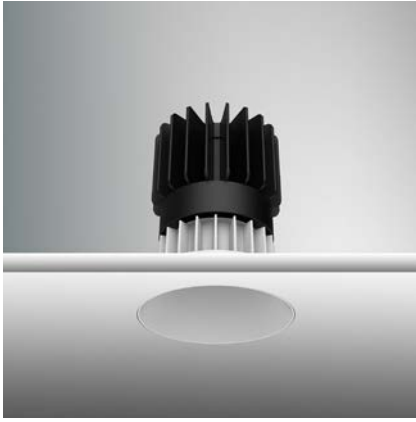
EPIC-110-RTLFL



Article number	2018.275F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
HE Delivered Lumen*	2851 (lm)	2307 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**


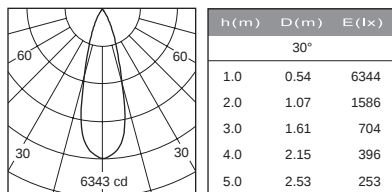
⌀ Cut out : 3^{30/32}" (100mm)




EPIC-110-RTLAL




Article number	2018.294F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
HE Delivered Lumen*	2816 (lm)	2338 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

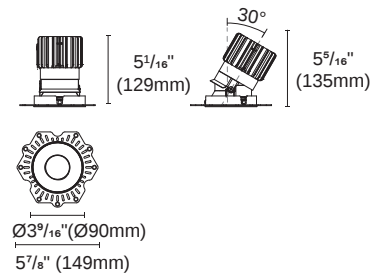**Dimmable**

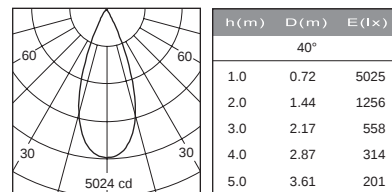⌀ Cut out : 3^{30/32}" (100mm)





EPIC-110-RTLWL

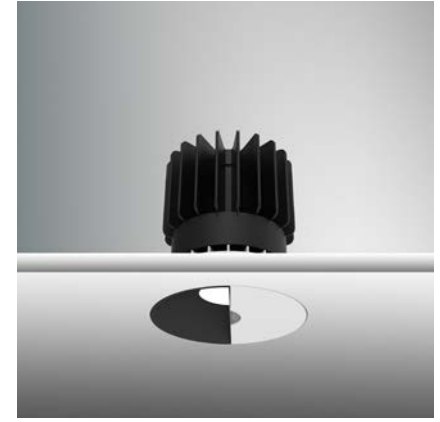


Article number	2018.276F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
HE Delivered Lumen*	1886 (lm)	1480 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

*Wallwash lens — best optical matching angle: 36°

**Dimmable**

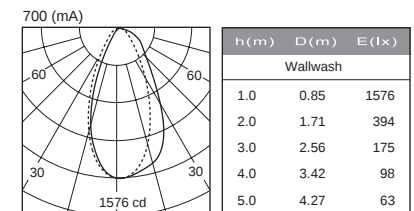⌀ Cut out : 3^{30/32}" (100mm)

**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures

EPIC-110-STF



EPIC-110-STA




EPIC-110-STW





Article number 2018.483-ACOT-84-AM


	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
HE Delivered Lumen*	2906 (lm)	2315 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable




△ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


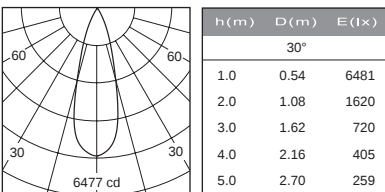


Article number 2018.495-ACOT-84-AM


	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
HE Delivered Lumen*	2835 (lm)	2346 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

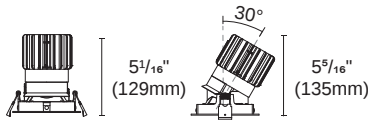

△ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

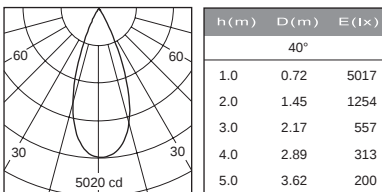



Article number 2018.484-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
HE Delivered Lumen*	1890 (lm)	1465 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	


*Wallwash lens — best optical matching angle: 36°



Dimmable



△ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

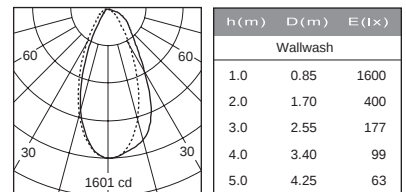

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet




WG7-1
Woven glass



ACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

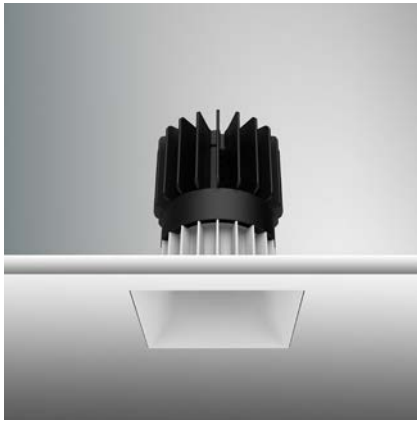EPIC-110-STLF





EPIC-110-STLA




EPIC-110-STLW

**Article number 2018.277A-ACOT-84-AM**




	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
HE Delivered Lumen*	2906 (lm)	2315 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**

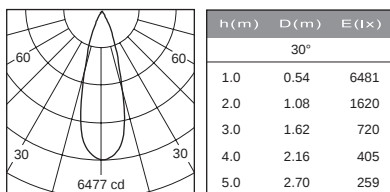
⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

**Article number 2018.295A-ACOT-84-AM**

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
HE Delivered Lumen*	2835 (lm)	2346 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



**Dimmable**

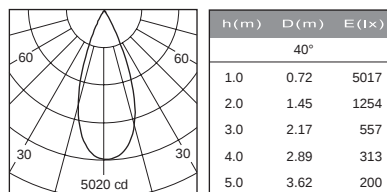⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


**Article number 2018.278A-ACOT-84-AM**

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
HE Delivered Lumen*	1890 (lm)	1465 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

*Wallwash lens — best optical matching angle: 36°





**Dimmable**

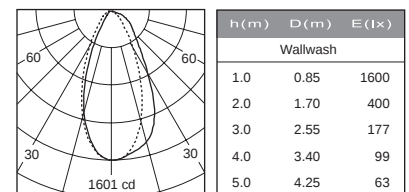⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)





**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures

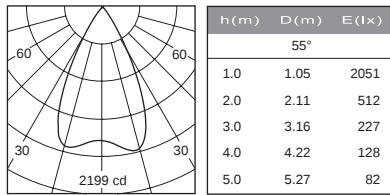
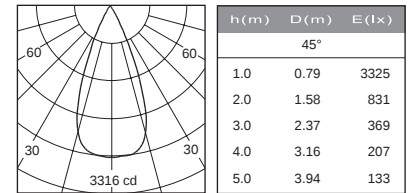
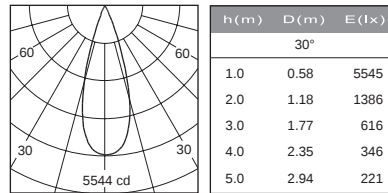
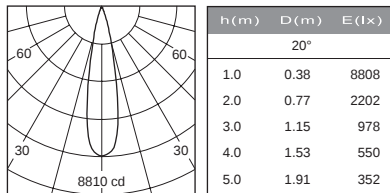
2018.481-LEA-15
2018.275F-LEA-15







2018.481-LEA15DW
2018.275F-LEA15DW

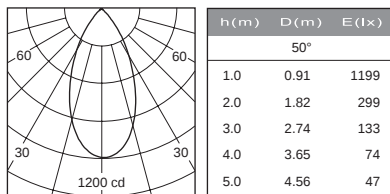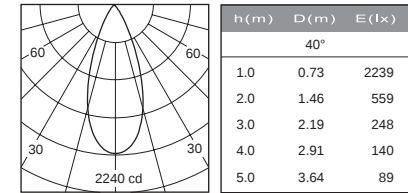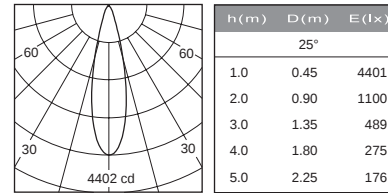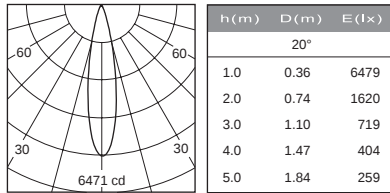


2018.494-LEA-15
2018.294F-LEA-15

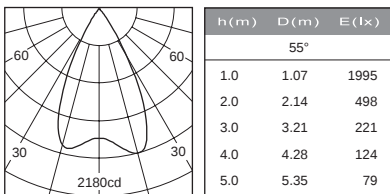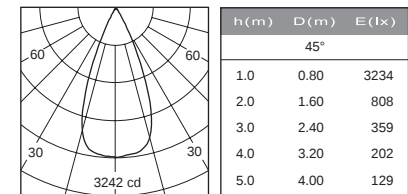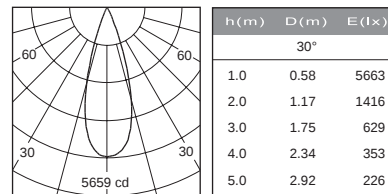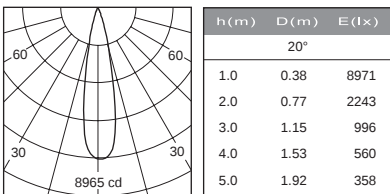

2018.494-LEA15DW
2018.294F-LEA15DW

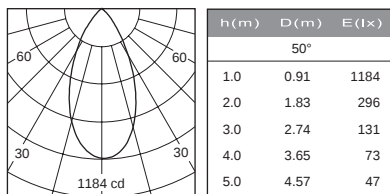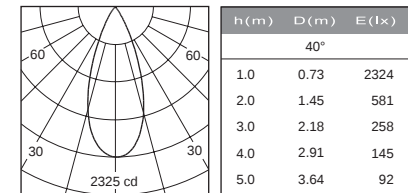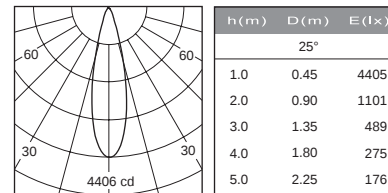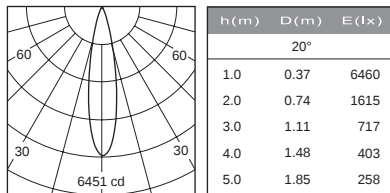


2018.482-LEA-15
2018.276F-LEA-15




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.77	1360
2.0	1.54	340
3.0	2.32	151
4.0	3.09	85
5.0	3.86	54

2018.482-LEA15DW
2018.276F-LEA15DW




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.80	811
2.0	1.60	202
3.0	2.40	90
4.0	3.21	50
5.0	4.01	32


2018.483-LEA-15
2018.277A-LEA-15




h (m)	D (m)	E (lx)
20°		
1.0	0.38	8437
2.0	0.77	2109
3.0	1.15	937
4.0	1.54	527
5.0	1.92	337



h (m)	D (m)	E (lx)
30°		
1.0	0.59	5246
2.0	1.17	1312
3.0	1.76	582
4.0	2.34	327
5.0	2.93	209




h (m)	D (m)	E (lx)
45°		
1.0	0.82	2999
2.0	1.63	749
3.0	2.45	333
4.0	3.26	187
5.0	4.08	120




h (m)	D (m)	E (lx)
55°		
1.0	1.06	2014
2.0	2.12	503
3.0	3.18	223
4.0	4.25	125
5.0	5.31	80


2018.483-LEA15DW
2018.277A-LEA15DW




h (m)	D (m)	E (lx)
20°		
1.0	0.37	6596
2.0	0.74	1649
3.0	1.10	732
4.0	1.47	412
5.0	1.84	263



h (m)	D (m)	E (lx)
25°		
1.0	0.45	4486
2.0	0.90	1121
3.0	1.35	498
4.0	1.80	280
5.0	2.25	179




h (m)	D (m)	E (lx)
40°		
1.0	0.72	2359
2.0	1.44	589
3.0	2.15	262
4.0	2.87	147
5.0	3.59	94




h (m)	D (m)	E (lx)
50°		
1.0	0.89	1273
2.0	1.77	318
3.0	2.66	141
4.0	3.55	79
5.0	4.44	50


2018.495-LEA-15
2018.295A-LEA-15




h(m)	D(m)	E(lx)
20°		
1.0	0.38	8345
2.0	0.77	2086
3.0	1.15	927
4.0	1.53	521
5.0	1.91	333



h(m)	D(m)	E(lx)
30°		
1.0	0.59	5262
2.0	1.18	1316
3.0	1.77	584
4.0	2.36	328
5.0	2.95	210




h(m)	D(m)	E(lx)
45°		
1.0	0.80	3244
2.0	1.60	761
3.0	2.40	338
4.0	3.20	190
5.0	4.01	121




h(m)	D(m)	E(lx)
55°		
1.0	1.05	2042
2.0	2.10	510
3.0	3.15	226
4.0	4.20	127
5.0	5.25	81


2018.495-LEA15DW
2018.295A-LEA15DW




h(m)	D(m)	E(lx)
20°		
1.0	0.37	6941
2.0	0.74	1735
3.0	1.11	771
4.0	1.48	433
5.0	1.85	277



h(m)	D(m)	E(lx)
25°		
1.0	0.45	4437
2.0	0.90	1109
3.0	1.34	493
4.0	1.79	277
5.0	2.24	177




h(m)	D(m)	E(lx)
40°		
1.0	0.70	2420
2.0	1.41	605
3.0	2.11	268
4.0	2.82	151
5.0	3.52	96




h(m)	D(m)	E(lx)
50°		
1.0	0.89	1239
2.0	1.78	309
3.0	2.67	137
4.0	3.57	77
5.0	4.46	49

2018.484-LEA-15
2018.278A-LEA-15



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.78	1264
2.0	1.56	316
3.0	2.34	140
4.0	3.12	79
5.0	3.90	57


2018.484-LEA15DW
2018.278A-LEA15DW



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.76	859
2.0	1.58	214
3.0	2.38	95
4.0	3.17	53
5.0	3.96	34





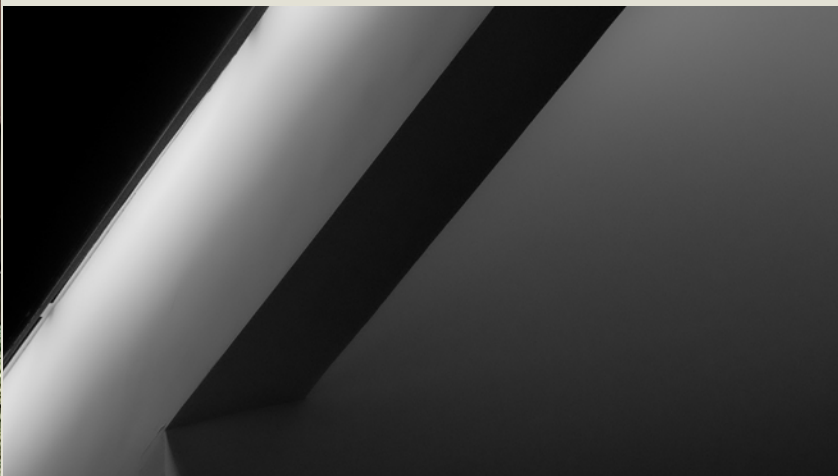

EPIC-135 ▶

4.5"




Round / Square

Fixed
Adjustable
Wallwash


EPIC-135-RTF



Article number	2018.464-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
HE Delivered Lumen*	4164 (lm)	3496 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**



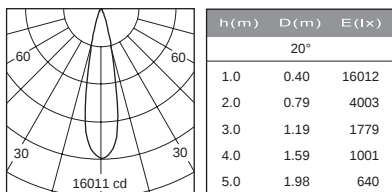
⌀ Cut out : 5 1/32" (128mm)




EPIC-135-RTA




Article number	2018.463-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
HE Delivered Lumen*	4019 (lm)	3428 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**

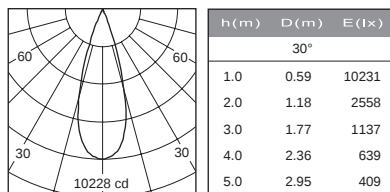⌀ Cut out : 5 1/32" (128mm)






EPIC-135-RTW

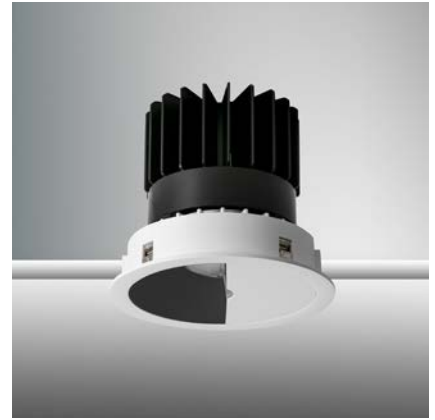


Article number	2218.146-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
HE Delivered Lumen*	2470 (lm)	2100 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

*Wallwash lens — best optical matching angle: 36°


**Dimmable**

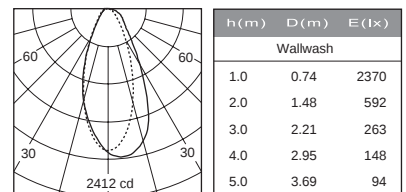⌀ Cut out : 5 1/32" (128mm)



**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

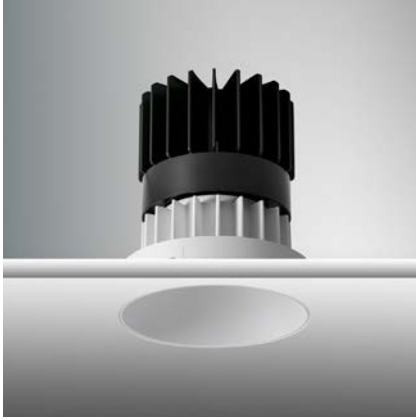
EPIC-135-RTL F



Article number	2018.256F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
HE Delivered Lumen*	4164 (lm)	3496 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**



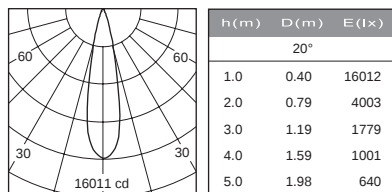
⌀ Cut out : 5 1/32" (128mm)




EPIC-135-RTL A




Article number	2018.255F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
HE Delivered Lumen*	4019 (lm)	3428 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**

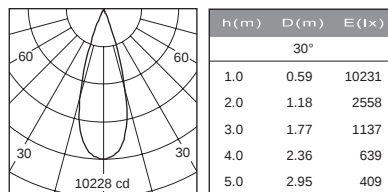⌀ Cut out : 5 1/32" (128mm)





EPIC-135-RTL W

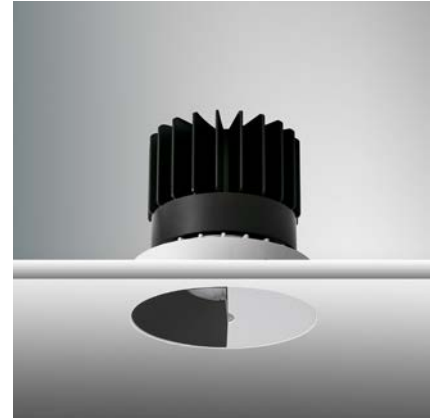


Article number	2218.218F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
HE Delivered Lumen*	2470 (lm)	2100 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

*Wallwash lens — best optical matching angle: 36°

**Dimmable**

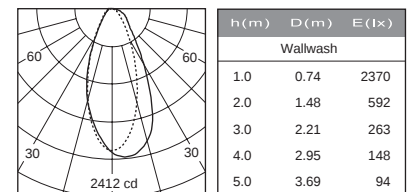⌀ Cut out : 5 1/32" (128mm)



**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-STF



Article number	2018.466-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
HE Delivered Lumen*	4105 (lm)	3540 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**


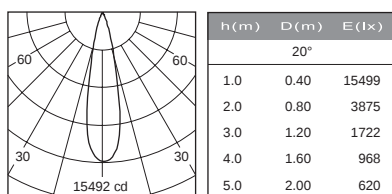
Cut out : 5 1/32"X5 1/32" (128X128mm)




EPIC-135-STA



Article number	2018.465-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
HE Delivered Lumen*	4084 (lm)	3483 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**

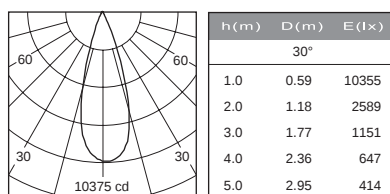Cut out : 5 1/32"X5 1/32" (128X128mm)





EPIC-135-STW




Article number	2218.147-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
HE Delivered Lumen*	2541 (lm)	2109 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

*Wallwash lens — best optical matching angle: 36°


**Dimmable**

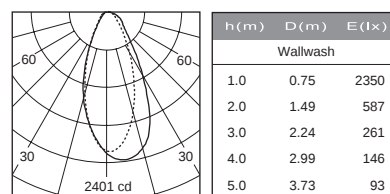Cut out : 5 1/32"X5 1/32" (128X128mm)

**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

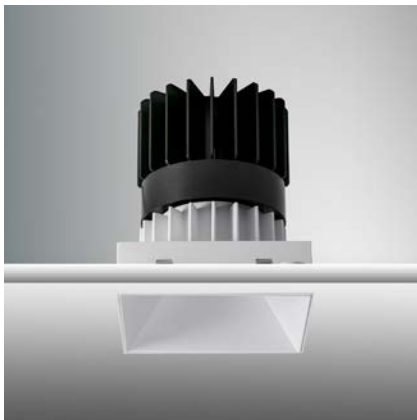
EPIC-135-STLF





EPIC-135-STLA



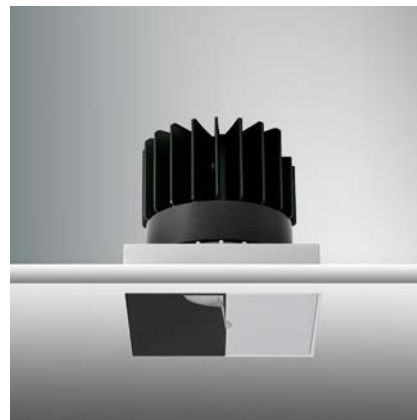
EPIC-135-STLW

**Article number** 2018.258A-ACOT-73-AM



	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
HE Delivered Lumen*	4105 (lm)	3540 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**

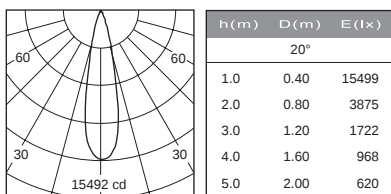
Cut out : 5 1/32"X5 1/32" (128X128mm)

**Article number** 2018.257A-ACOT-73-AM

	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
HE Delivered Lumen*	4084 (lm)	3483 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



**Dimmable**

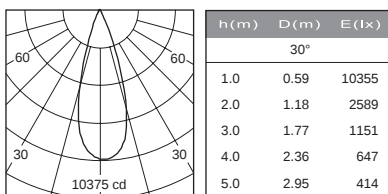Cut out : 5 1/32"X5 1/32" (128X128mm)


**Article number** 2218.219A-ACOT-73-AM

	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
HE Delivered Lumen*	2541 (lm)	2109 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

*Wallwash lens — best optical matching angle: 36°

**Dimmable**

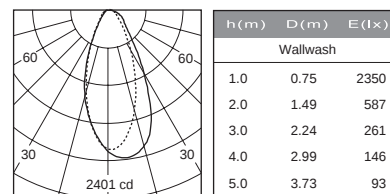Cut out : 5 1/32"X5 1/32" (128X128mm)


**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

INSTALLATION OPTIONS



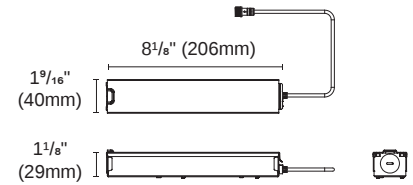
ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: Gear box



Internal space dimension:
 L 4 3/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)



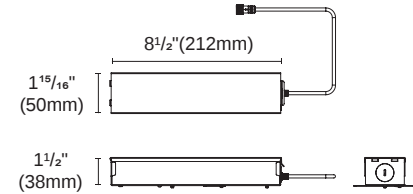
ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box



Internal space dimension:
 L 8 3/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)



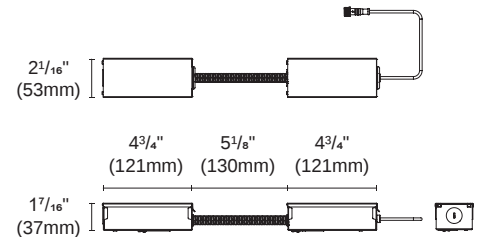
ACCG-35B-PUP20A-1WMC 0/1-10V
ACCG-35B-PUP20D-1WMC DALI
ACCG-35B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box



* Use with low ceilings



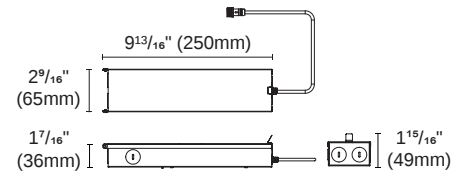ACCG-16B-PUP40A-1WMC-850 0/1-10V
ACCG-16B-PUP40D-1WMC-850 DALI
ACCG-16B-PUP40T-1LMC-850 TRIAC
 for EPIC110-3.5" (30W)
 Type: Gear box



* For single fixture connection only, not available for parallel multiple connection

ACCG-16B-PUP40A-1WMC-1200 0/1-10V
ACCG-16B-PUP40D-1WMC-1200 DALI
ACCG-16B-PUP40T-1LMC-1200 TRIAC
 for EPIC135-4.5"
 Type: Gear box

Internal space dimension:
 L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)



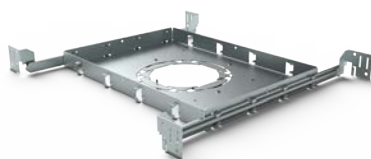

ACCH-12-60 for EPIC65-2"

Type: New construction plate

Cut out:

Round : $\varnothing 2\frac{12}{32}$ " ($\varnothing 60$ mm)

Square : $\square 2\frac{12}{32}$ " ($\square 60$ mm)



ACCH-12-80 for EPIC85-2.8"


Type: New construction plate

Cut out:

Round : $\varnothing 3\frac{5}{32}$ " ($\varnothing 80$ mm)

Square : $\square 3\frac{5}{32}$ " ($\square 80$ mm)

Also for Millwork



ACCH-12H-100 for EPIC110-3.5"

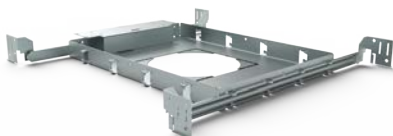

Type: New construction plate

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)

Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork



ACCH-12H-125


for EPIC135-4.5"

Type: New construction plate


Cut out:

Round : $\varnothing 5\frac{1}{32}$ " ($\varnothing 128$ mm)

Square : $\square 5\frac{1}{32}$ " ($\square 128$ mm)



INSTALLATION OPTIONS

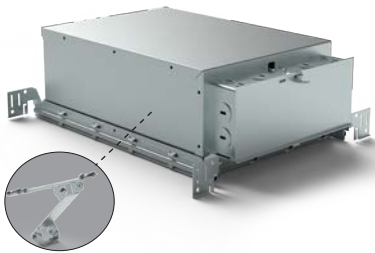

Driver is secured on patent designed bracket

ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
ACCH-12D-60-PUP10D-1WMC-350 DALI
ACCH-12D-60-PUP10T-1LMC-350 TRIAC

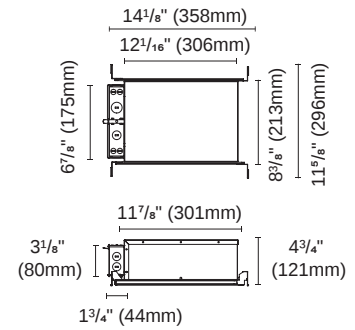
for EPIC65-2"

Type: IC Box

Cut out:

Round : $\varnothing 2\frac{12}{32}$ " ($\varnothing 60$ mm)

Square : $\square 2\frac{12}{32}$ " ($\square 60$ mm)



ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC

for EPIC85-2.8"

Type: IC Box

Cut out:

Round : $\varnothing 3\frac{5}{32}$ " ($\varnothing 80$ mm)

Square : $\square 3\frac{5}{32}$ " ($\square 80$ mm)

Also for Millwork



ACCH-12B-100-PUP20A-1WMC 0/1-10V
ACCH-12B-100-PUP20D-1WMC DALI
ACCH-12B-100-PUP20T-1LMC TRIAC

for EPIC110-3.5" (18-21W)

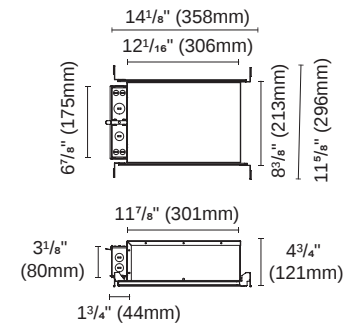
Type: IC Box

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)

Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork



ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
ACCH-7B-100-PUP40D-1WMC-850 DALI
ACCH-7B-100-PUP40T-1LMC-850 TRIAC

for EPIC110-3.5" (25W)

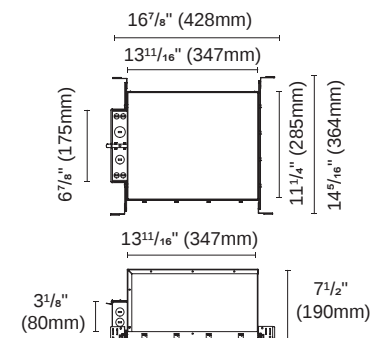
Type: IC Box

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)

Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork



ACCH-7B-125-PUP40A-1WMC-1200 0/1-10V
ACCH-7B-125-PUP40D-1WMC-1200 DALI
ACCH-7B-125-PUP40T-1LMC-1200 TRIAC

for EPIC135-4.5"

Type: IC Box

Cut out:

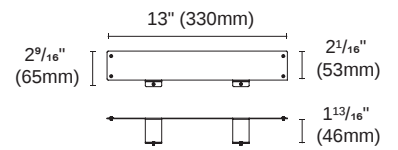
Round : $\varnothing 5\frac{1}{32}$ " ($\varnothing 128$ mm)

Square : $\square 5\frac{1}{32}$ " ($\square 128$ mm)



ACCI-3

Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY



ACCI-5

Type: Remodel stand

