

BRAVO SERIES (AM)



BRAVO (AM)

The full range of recessed LED downlights with their compact tapered design provides excellent visual comfort, energy efficiency, easy installation and good architectural integration.

The most advanced LED modules on the market are installed to ensure reliable, quality lighting. Full range of optics with 30 degree cut-off angle and a variety of mounting solutions to meet any lighting need, even in double-height ceilings, in any material and environment. The adjustable BRAVO also features a precise and reliable tilt and rotation system, even when the product is already in place.

Shape
(Baffle Size)



Round
2.8"



Square
2.8"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable





Cone baffle

It is a multifunctional accent light that can highlight a single object or architectural element.

Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

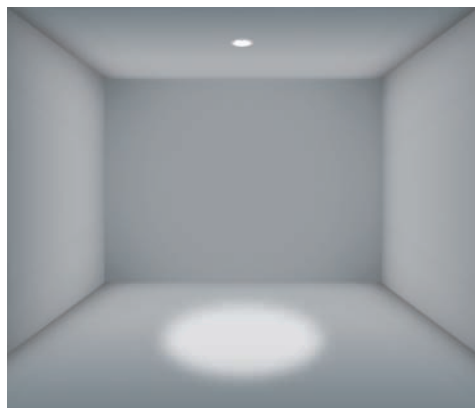
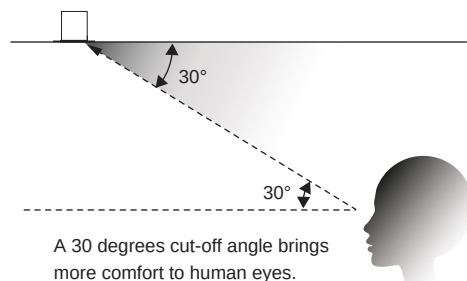


Pinhole baffle

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

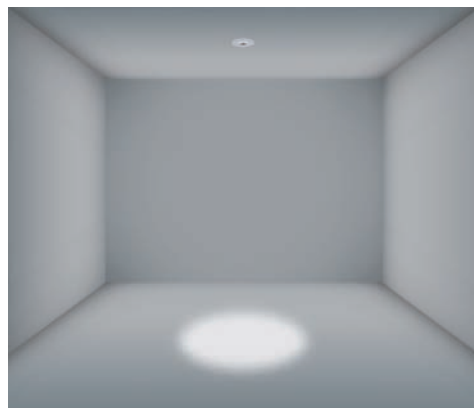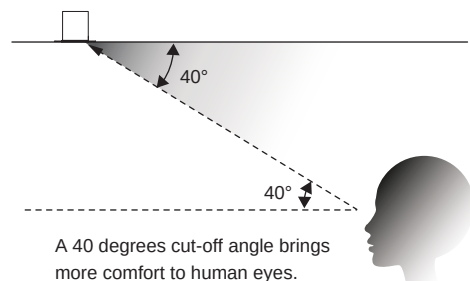




Pinhole baffle
Suitable for hotels, restaurants, residences,
Karaoke rooms and other low Angle-adjustable
accent lighting for small spaces.

BRAVO
adjustable

round / square

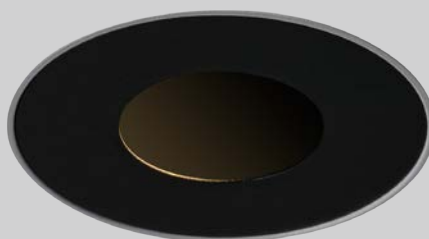



Specification

3000 K

CRI $\geq$ 90

DALI, TRIAC, 1-10V

Types (round & square)



Colours

Bezel : ☒ Black ☐ White

Baffle : ☒ Black ☐ White

Beam Angle



15°/24°/36°/50° (Lens)


NON-IC




BRAVO-85-RTA3



Article number	2218.139-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

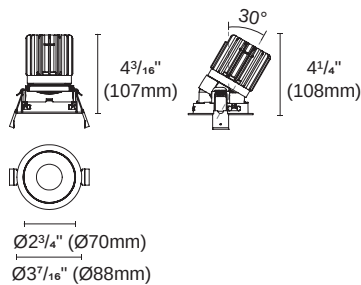

Cut out : 3 5/32" (80mm)


BRAVO-85-RTA4



Article number	2218.140-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

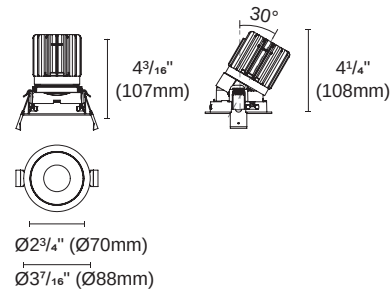

Cut out : 3 5/32" (80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass



BRAVO-85-RTLA3



Article number	2218.212F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)



BRAVO-85-RTLA4



Article number	2218.213F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable




⌀ Cut out : 3 5/32" (80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass


BRAVO-85-STA3

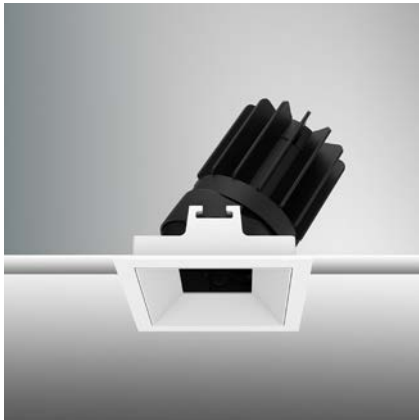

Article number	2218.141-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

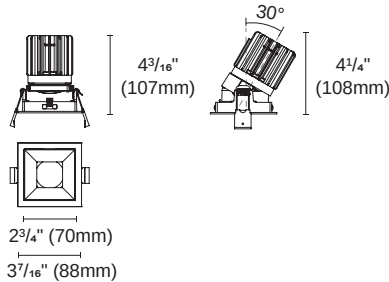

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STA4



Article number	2218.142-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

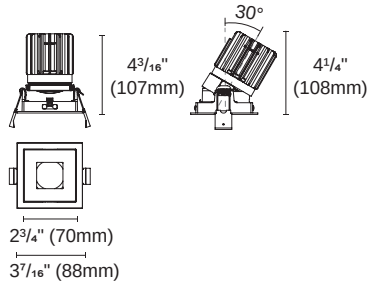


Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

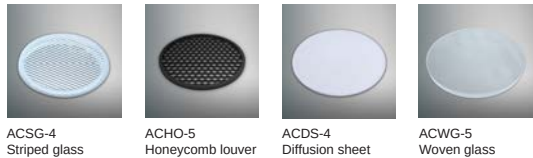


BRAVO-85-STLA3

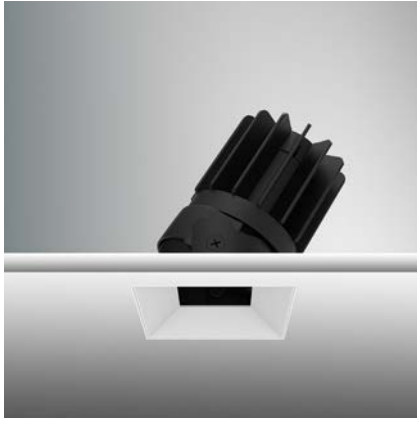

Article number	2218.214A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

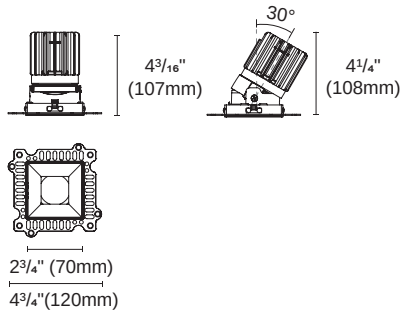
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STLA4



Article number	2218.215A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

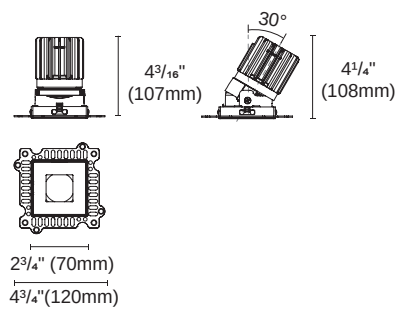
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass

BRAVO
adjustable



round / square



Specification

3000 K
CRI ≥ 90
DALI, TRIAC, 1-10V

Types (round & square)



Colours

Bezel : ☒ Black ☐ White
Baffle : ☒ Black ☐ White

Beam Angle

15°/24°/36°/50° (Lens)

IC




BRAVO-85-RTA1



Article number	2118.549-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

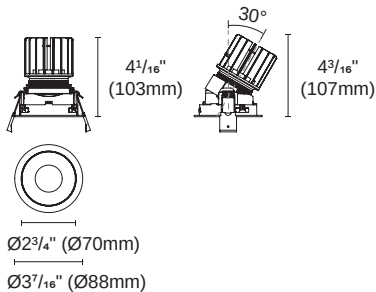

Cut out : 3 5/32" (80mm)


BRAVO-85-RTA2



Article number	2118.550-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

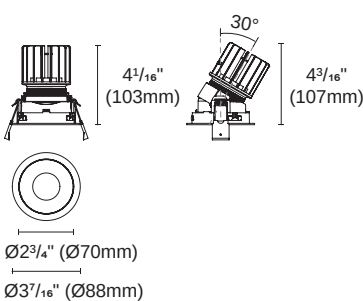

Cut out : 3 5/32" (80mm)

Accessories

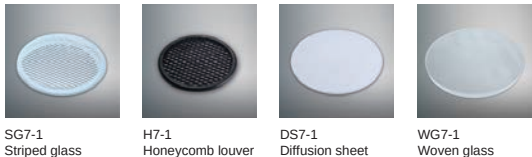

SG7-1
Striped glass

H7-1
Honeycomb louver

DS7-1
Diffusion sheet

WG7-1
Woven glass


BRAVO-85-RTLA1



Article number	2118.650F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

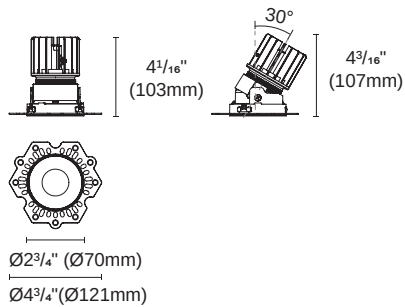

⌀ Cut out : 3 5/32" (80mm)


BRAVO-85-RTLA2

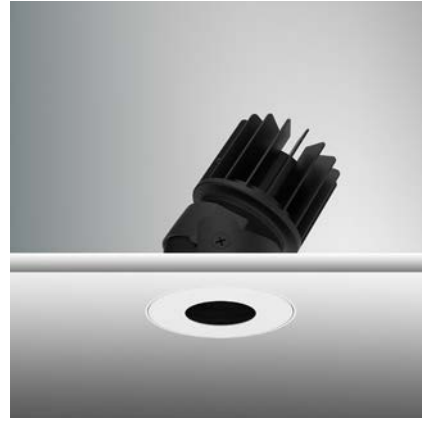

Article number	2118.651F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

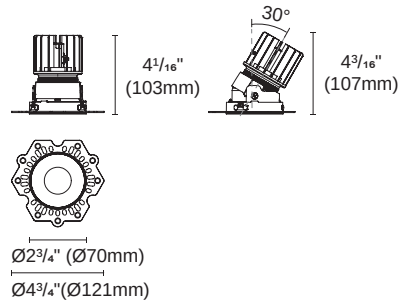


⌀ Cut out : 3 5/32" (80mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


BRAVO-85-STA1

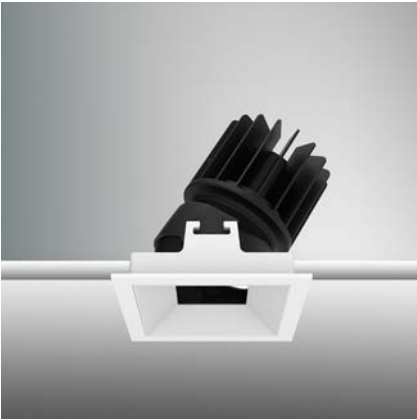

Article number	2118.552-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

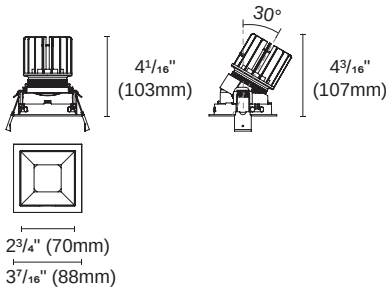


 Cut out : 3 5/32"X3 5/32" (80X80mm)


BRAVO-85-STA2



Article number	2118.562-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

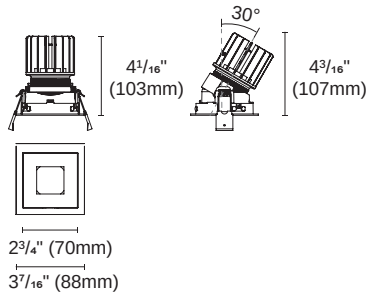

 Cut out : 3 5/32"X3 5/32" (80X80mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet




WG7-1
Woven glass


BRAVO-85-STLA1



Article number	2118.653A-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

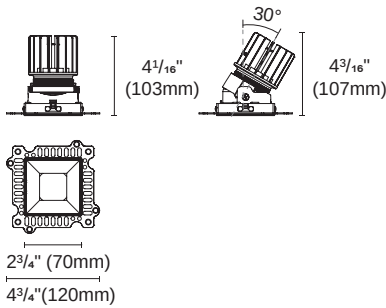


 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STLA2



Article number	2118.658A-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

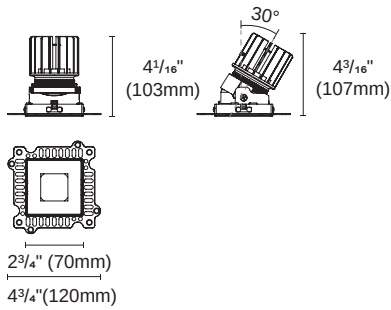

 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories




SG7-1 Striped glass H7-1 Honeycomb louver DS7-1 Diffusion sheet WG7-1 Woven glass


INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
for BRAVO-2.8" round / square (8W)
Type: Gear box

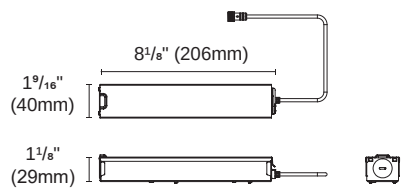

Internal space dimension:
L 4 3/4" (108mm)X W 1 3/8" (35mm)X H 1" (26mm)

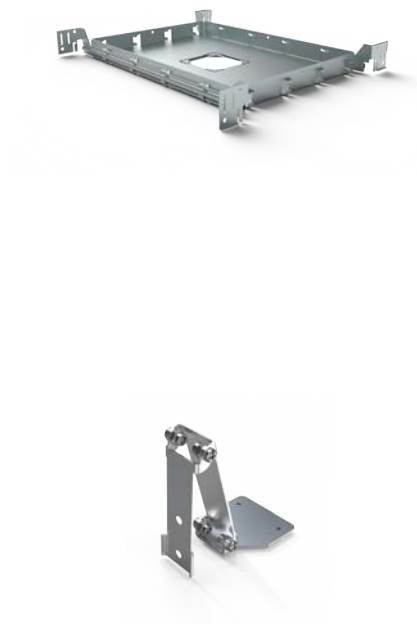


ACCCH-12-80
for BRAVO-2.8" round / square (8W / 20W)
Type: New construction plate




ACCI-5
Type: Remodel stand



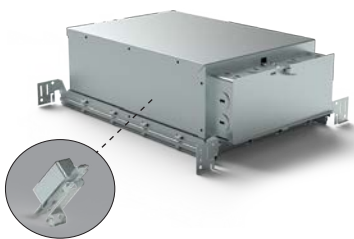

Driver is secured on patent designed bracket

ACCH-12D-80-PUP20A-1WMC 0/1-10V
 ACCH-12D-80-PUP20D-1WMC DALI
 ACCH-12D-80-PUP20T-1LMC TRIAC
 for BRAVO-2.8" round / square (20W)
 Type: IC Box



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

