

NANIA SERIES (AM)



NANIA (AM)

The specially designed thin trim, and low glare modules, make less existence of the fixture to the area.

Easy change module from the front for more convenience during installation.

Suitable for residential and shop applications.

Material: Aluminum forging heatsink , aluminum die casting trim.

Shape
(Baffle Size)



Round
3.5"


Mountings



Recessed
Trim

Recessed
Trimless

Light distributions



Fixed


Adjustable

NANIA (AM)




Light distribution

NANIA is highly flexible and adapts to evolving conditions in shops. The high-quality lens produces precise beam characteristics with three different beam angles. Excellent colour rendering value (CRI ≥ 90) at 2700 K, 3000 K, or 4000 K ensures outstanding product presentation. NANIA is simply mounted without tool used.

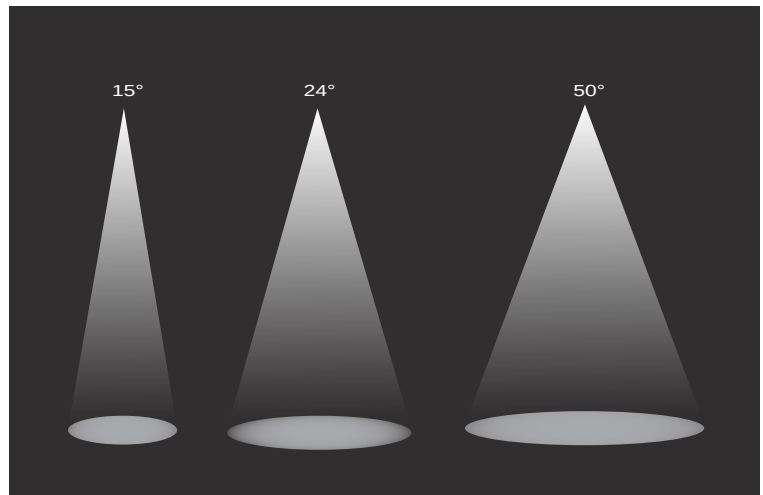

Trimless combinations

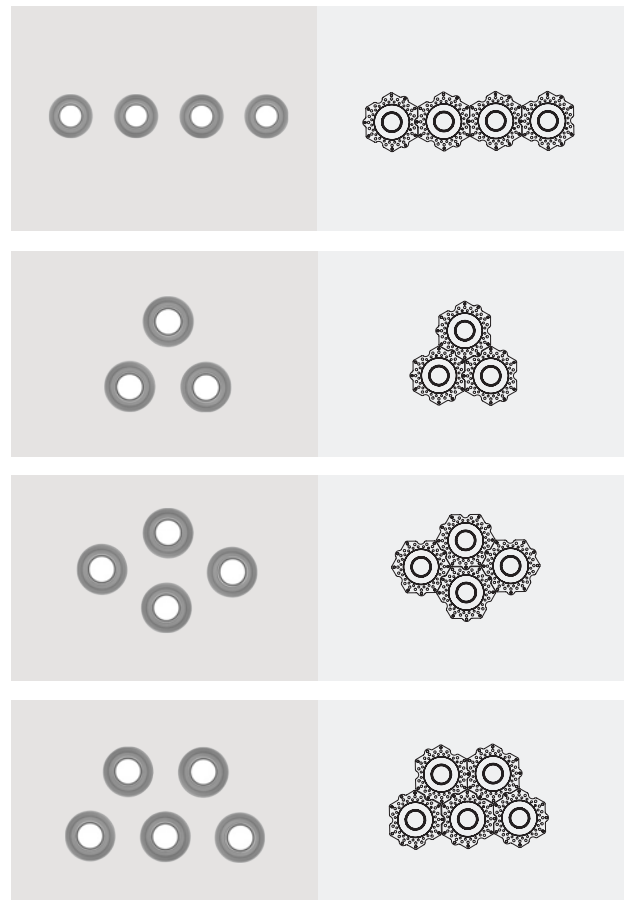


NANIA round
fixed / adjustable



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
TRIAC, 1-10V , DALI

Types (round)



Colours

Bezel :  Black  White
Baffle :  Black  White

Beam Angle

   
15°/24°/36°/50° (Lens)






NANIA-100-RTF



Article number	2118.575-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 3 21/32" (93mm)


NANIA-100-RTA



Article number	2118.576-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

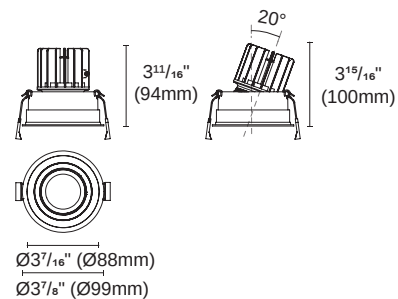

Cut out : 3 21/32" (93mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


NANIA-100-RTL



Article number	2118.663-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable




○ Cut out : 3²¹/₃₂" (93mm)


NANIA-100-RTLA

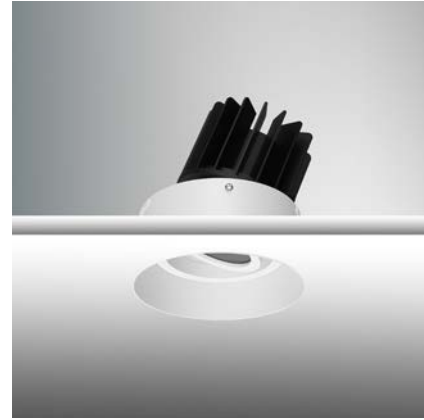

Article number	2118.664-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

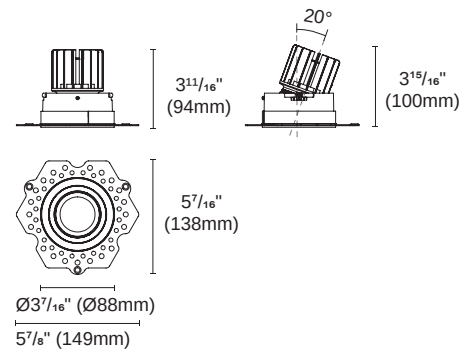

○ Cut out : 3²¹/₃₂" (93mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

INSTALLATION OPTIONS



ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
Type: Gear box

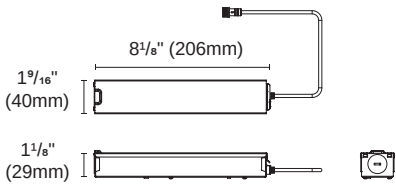

Internal space dimension:
L $4\frac{1}{4}"$ (108mm) X W $1\frac{3}{8}"$ (35mm) X H 1" (26mm)



ACCH-12-R93
Type: New construction plate

