




KANO SERIES (AM)



KANO (AM)

KANO is designed to improve the concept of downlight with high power LED and low glare baffle design. Therefore, it provides comfort, circular and anti glare distribution. Overall appearance shows neat and elegant for interior area. In other words, KANO is able to use as primary or decorative illumination for widely applications; such as office, restaurant, hotel, highend store, residential housing and so on.

Shape



1T

2T

4T

5T

10T

15T

Mountings



Recessed
Trim

Recessed
Trimless

Light distributions



Fixed

Adjustable

Wallwash

KANO recessed downlights
fixed / adjustable / wallwash




Specification

2700 K, 3000 K, 4000 K,
CRI $\geq$ 90
IP20

Types



fixed		1T/2T/4T/5T/10T/15T
adjustable		5T/10T/15T
wallwash		5T/10T/15T

Colours

Bezel :  Black  White

Baffle :  Black


Custom baffle colour

 White  Gold  Chrome  Rosegold
(MOQ is required for custom colours)

Beam Angle

  
15°/30°/40° (Reflector)



Wallwash



Light engine installation






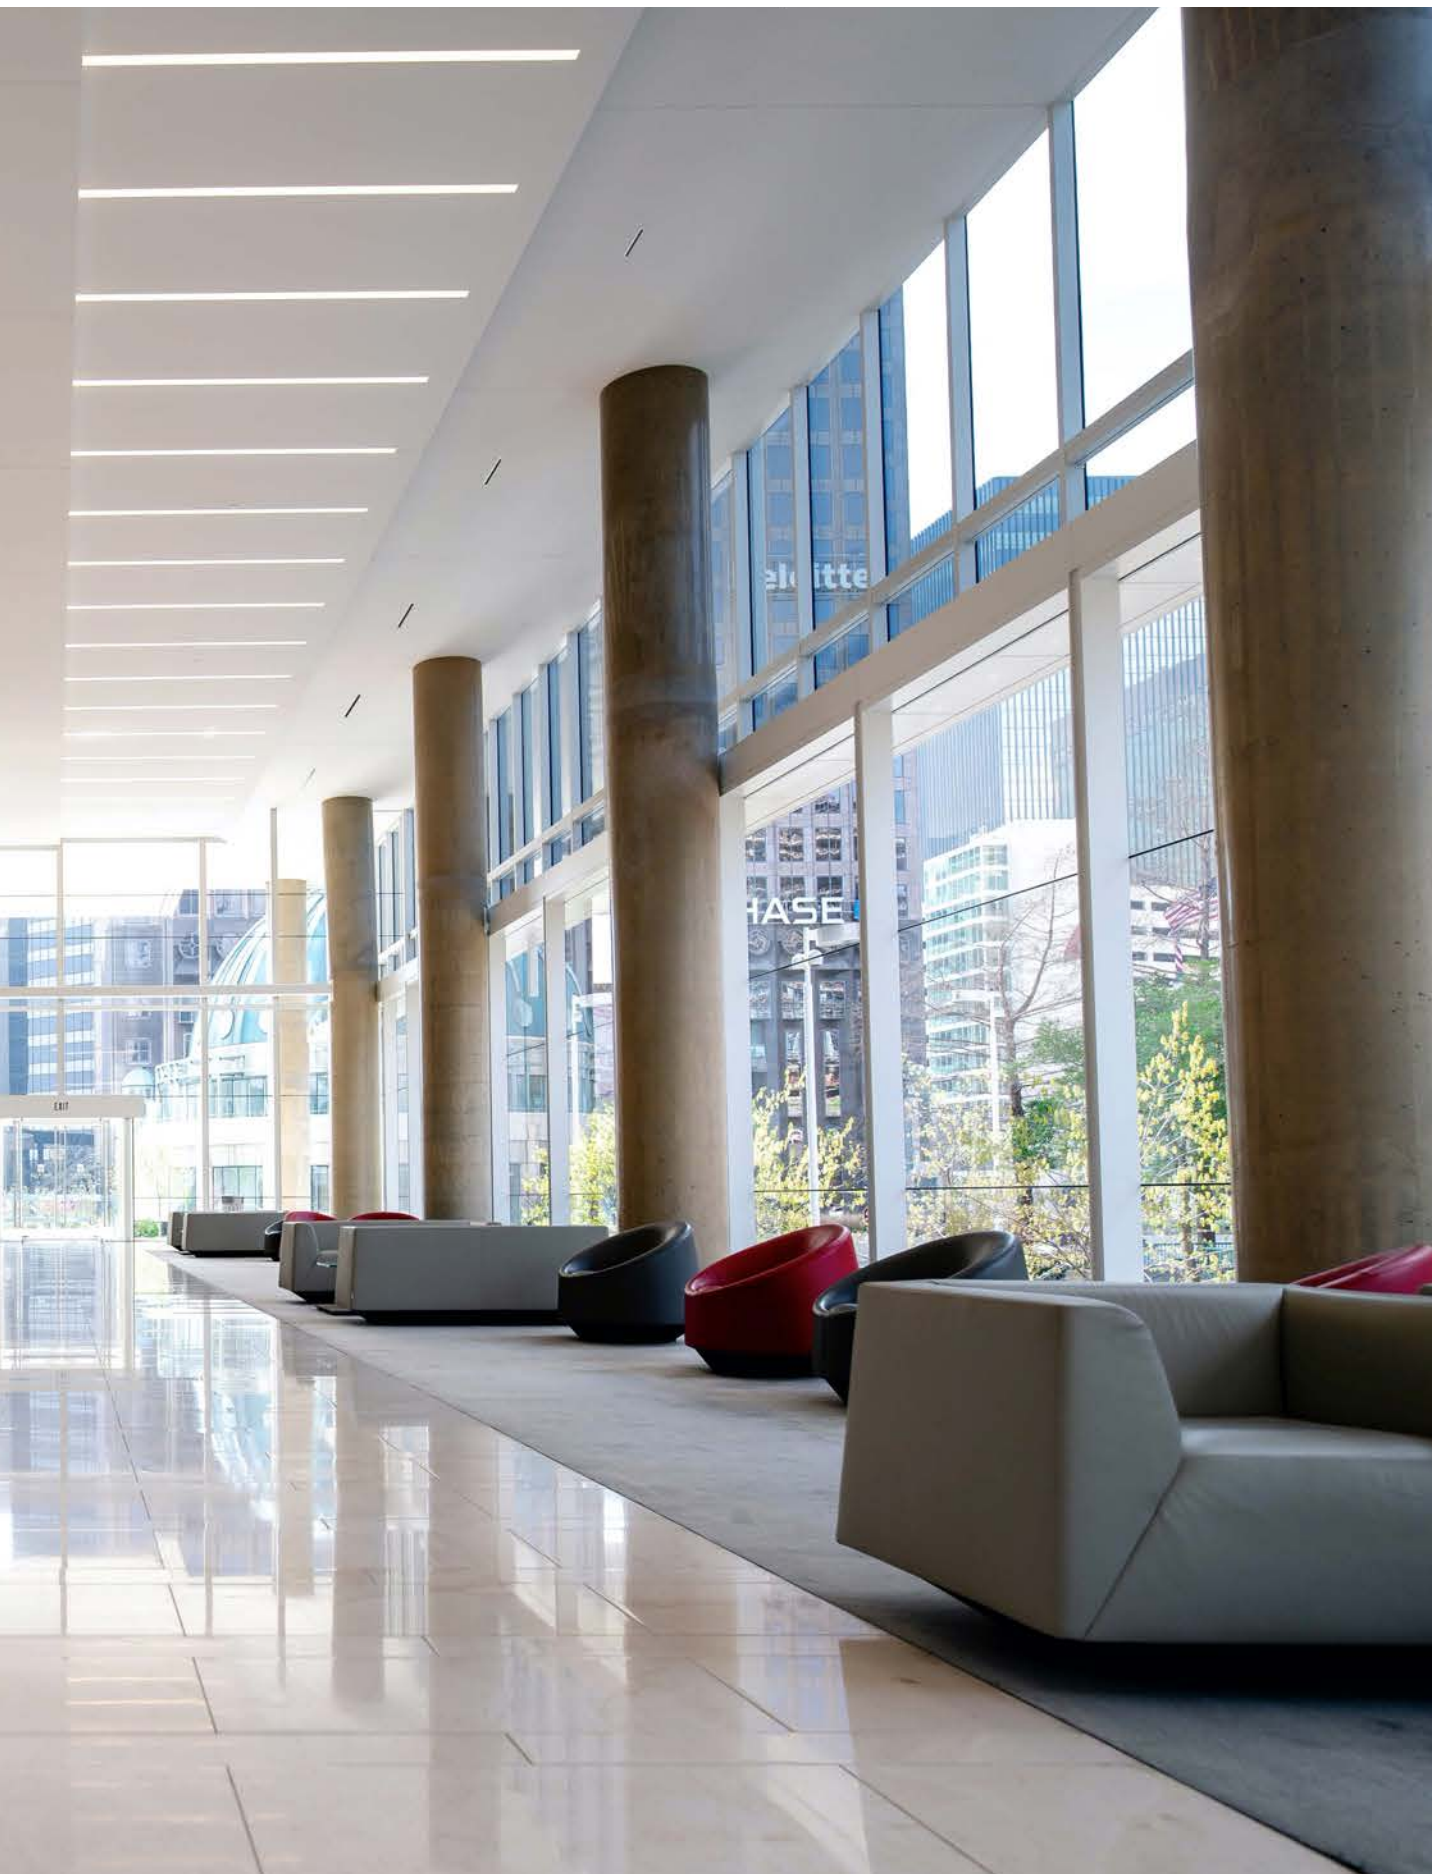


KANO-II-1-TF



Article number	1814.400-1-AM
Fixture Consumption	4.5W
Voltage	120-277 V
Delivered Lumen	171 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI




Cut out : 1¹⁸/₃₂"X1¹⁸/₃₂" (40X40mm)

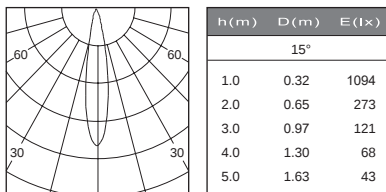


KANO-II-2-TF



Article number	1814.400-2-AM
Fixture Consumption	7W
Voltage	120-277 V
Delivered Lumen	326 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



Cut out : 1¹⁷/₃₂"X2¹⁸/₃₂" (39X65mm)

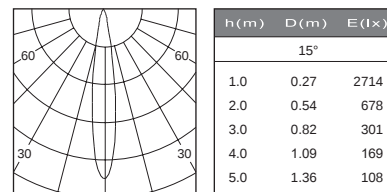

KANO-II-4-TF




Article number	1814.413-4-AM
Fixture Consumption	11W
Voltage	120-277 V
Delivered Lumen	656 (lm)
Beam Angle	15°/30°/45° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0700-RD




Dimmable

0-10V



Cut out : 2²⁰/₃₂"X2²³/₃₂" (67X69mm)

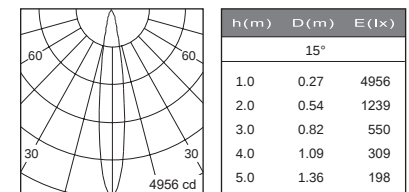



KANO-III-5-TF



Article number	2114.412-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD

**Dimmable**

0-10V

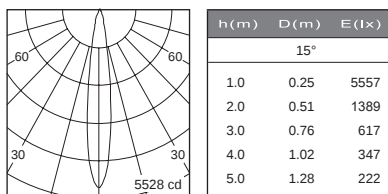
 Cut out : 1¹⁷/₃₂"X5¹⁴/₃₂" (39X138mm)


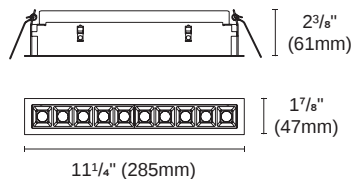
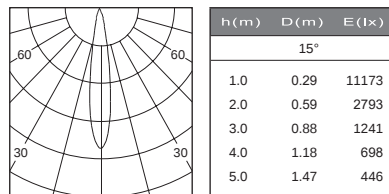
KANO-III-10-TF



Article number	2114.412-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD

**Dimmable**

0-10V


 Cut out : 1²⁰/₃₂"X10²³/₃₂" (41X272mm)


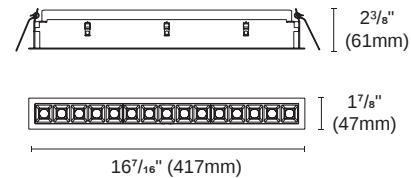
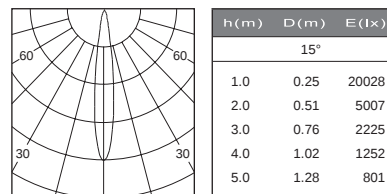
KANO-III-15-TF



Article number	2114.412-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD

**Dimmable**

0-10V


 Cut out : 1²⁰/₃₂"X15²⁹/₃₂" (41X404mm)


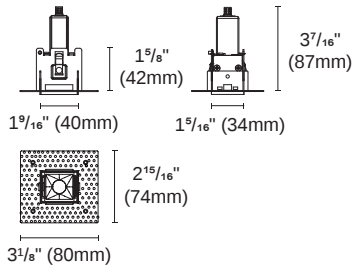
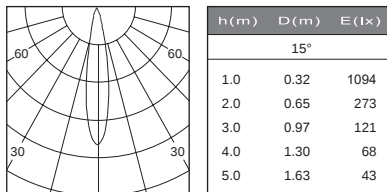
KANO-II-1-TLF



Article number	1814.402-1-AM
Fixture Consumption	4.5W
Voltage	120-277 V
Delivered Lumen	171 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



Locking Type : Push


 Cut out : 1²⁵/₃₂"X1³¹/₃₂" (45X50mm)


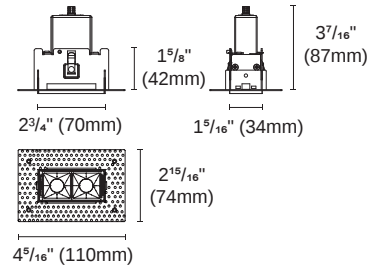
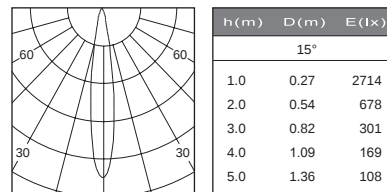
KANO-II-2-TLF



Article number	1814.402-2-AM
Fixture Consumption	7W
Voltage	120-277 V
Delivered Lumen	326 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



Locking Type : Push


 Cut out : 1²⁵/₃₂"X3⁵/₃₂" (45X80mm)


KANO-II-4-TLF





Article number	1814.402-4-AM
Fixture Consumption	11W
Voltage	120-277 V
Delivered Lumen	656 (lm)
Beam Angle	15°/30°/45° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0700-RD

**Dimmable**

0-10V

Locking Type : Push

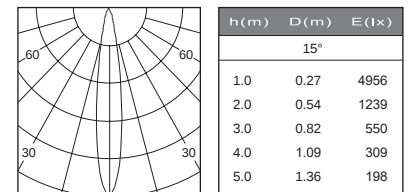
 Cut out : 2³⁰/₃₂"X3⁵/₃₂" (75X80mm)


KANO-III-5-TLF





Article number	2114.409-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD

**Dimmable**

0-10V

Locking Type : Push

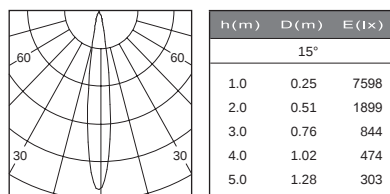
 Cut out : 1²⁶/₃₂"X6¹/₃₂" (46X153mm)


KANO-III-10-TLF





Article number	2114.409-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD

**Dimmable**

0-10V

Locking Type : Push

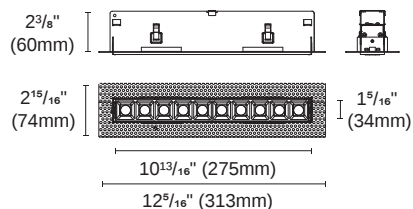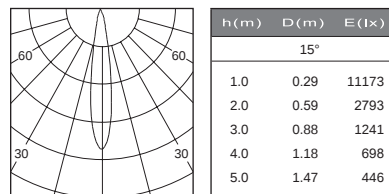
 Cut out : 1²⁶/₃₂"X11⁹/₃₂" (46X286mm)


KANO-III-15-TLF





Article number	2114.409-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD

**Dimmable**

0-10V

Locking Type : Push

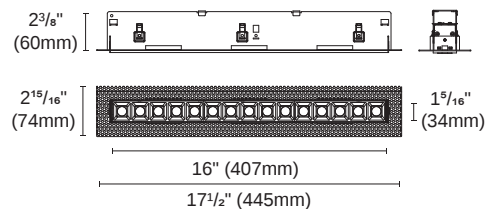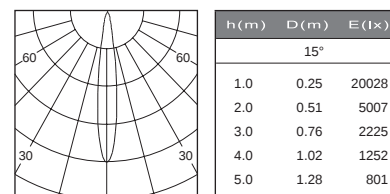
 Cut out : 1²⁶/₃₂"X16¹⁵/₃₂" (46X418mm)



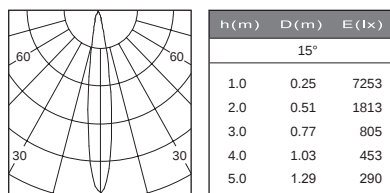
KANO-II-5-TA



Article number	1814.401-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD

**Dimmable**

0-10V


 Cut out : 2²⁴/₃₂"X6¹⁰/₃₂" (70X160mm)


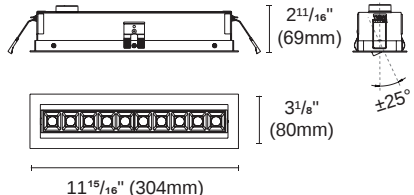
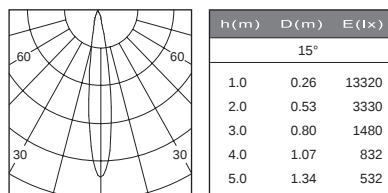
KANO-II-10-TA



Article number	1814.401-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD

**Dimmable**

0-10V


 Cut out : 2²⁴/₃₂"X11¹⁷/₃₂" (70X293mm)


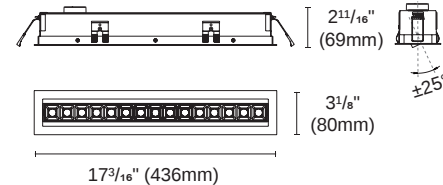
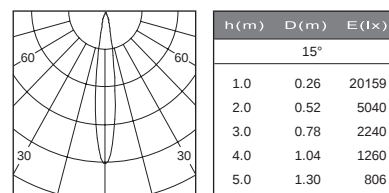
KANO-II-15-TA



Article number	1814.401-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD

**Dimmable**

0-10V


 Cut out : 2²⁴/₃₂"X16²³/₃₂" (70X425mm)


KANO-II-5-TLA




Article number	1914.429-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD




Dimmable

0-10V

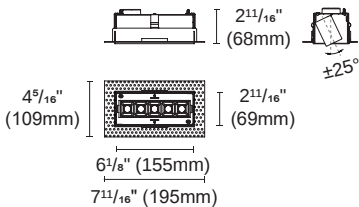

Cut out : 3²/₃₂"X6²⁹/₃₂" (78X168mm)

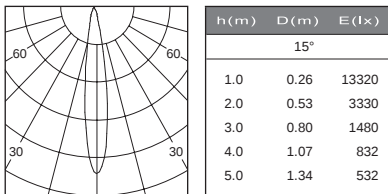

KANO-II-10-TLA




Article number	1914.429-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD




Dimmable

0-10V

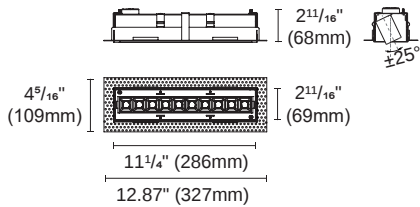

Cut out : 3²/₃₂"X11²⁶/₃₂" (78X300mm)

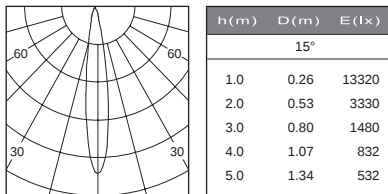

KANO-II-15-TLA




Article number	1914.429-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD




Dimmable

0-10V

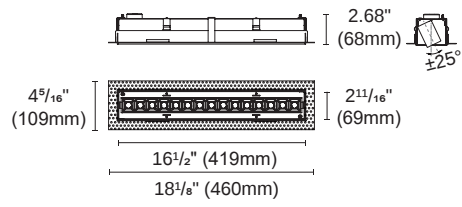


Cut out : 3²/₃₂"X17²/₃₂" (78X433mm)

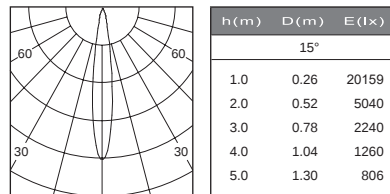



KANO-III-5-TW



Article number	2114.413-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	431 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD

**Dimmable**


0-10V

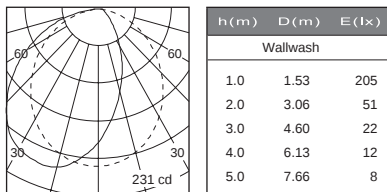
 Cut out : 1¹⁷/₃₂"X5¹⁵/₃₂" (39X138mm)


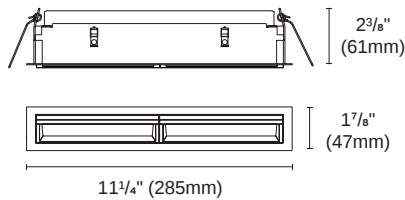
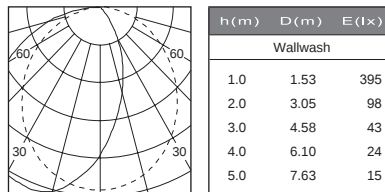
KANO-III-10-TW



Article number	2114.413-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	834 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD

**Dimmable**


0-10V


 Cut out : 1²⁰/₃₂"X10²³/₃₂" (41X272mm)


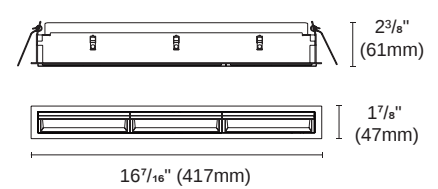
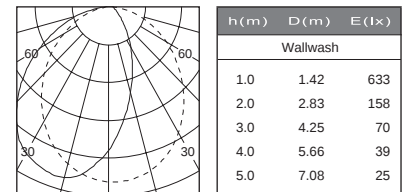
KANO-III-15-TW



Article number	2114.413-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1217 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PSB50W-0850-56

**Dimmable**

0-10V


 Cut out : 1²⁰/₃₂"X15²⁹/₃₂" (41X404mm)


KANO-II-5-TLW




Article number	2114.411-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	431 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD




Dimmable

0-10V



Cut out : 1 26/32"X6 1/32" (46X153mm)

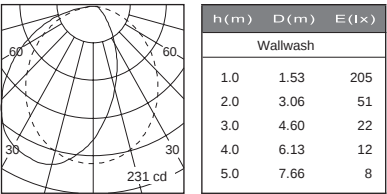

KANO-II-10-TLW




Article number	2114.411-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	834 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD




Dimmable

0-10V

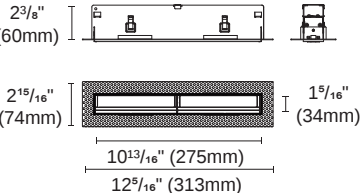


Cut out : 1 26/32"X11 8/32" (46X286mm)

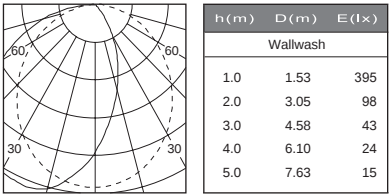

KANO-II-15-TLW




Article number	2114.411-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1217 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PSB50W-0850-56




Dimmable

0-10V

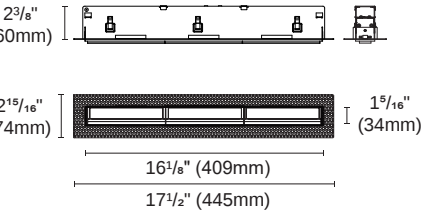


Cut out : 1 26/32"X16 15/32" (46X418mm)

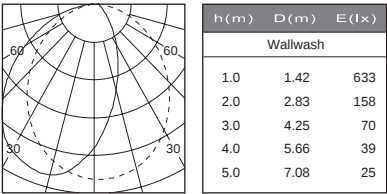




ACCG-26A-LSC4W700P UNI non dim
Type: Gear box and Driver
for 1T / 2T

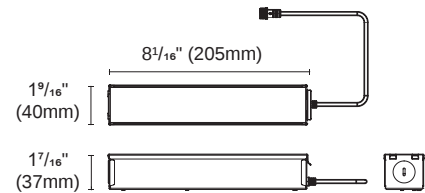

Inside: L 7 3/4" (197mm)X W 1 1/2" (38mm)X H 1 9/16" (34mm)



ACCG-20A-LBS12W-16-C0700-RD
for KANO-4
ACCG-20A-LBS12W-16-C0600-RD
for KANO-5
ACCG-20A-LBS30W-42-C0600-RD
for KANO-10
ACCG-20A-LBS30W-48-C0550-RD
for KANO-15
ACCG-20A-PSB50W-0850-56
for KANO-15-WW
Type: Gear box and Driver
0-10V

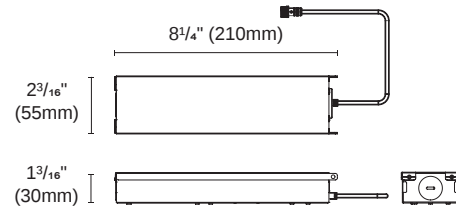


Inside: L 7 7/8" (200mm)X W 2 1/16" (53mm)X H 1 1/16" (27mm)





ACCG-25-69x272

Type: New construction plate
Trim Fixed (1T/2T/4T/5T/10T)
Trim Wallwash (5T/10T)

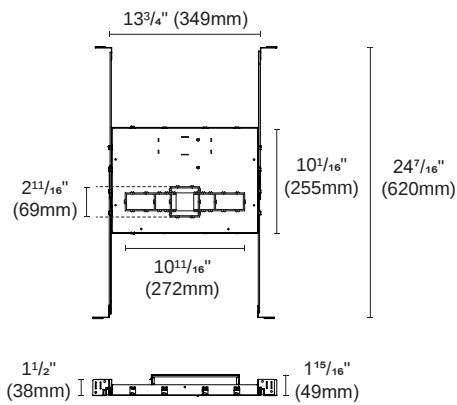


ACCH-1-70x426

Type: New construction plate
Trim Fixed (15T) ,
Trim Adjustable (5T/10T/15T),
Trim Wallwash (15T)

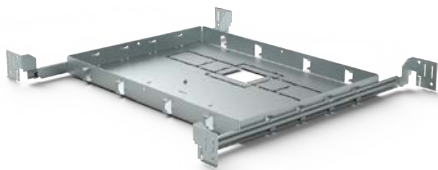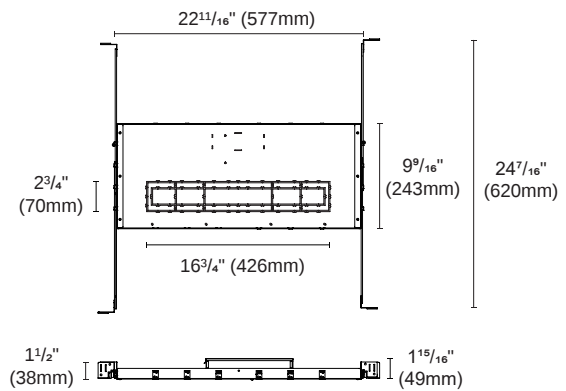

ACCG-25-75X284

Type: New construction plate
Trimless Fixed (1TL/2TL/4TL/5TL/10TL)
Trimless Wallwash (5TL/10TL)

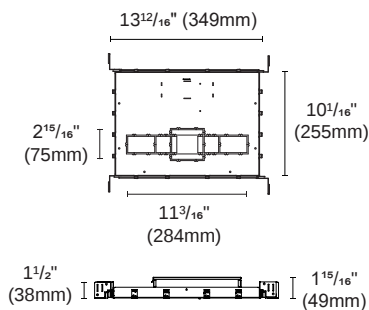

ACCH-1-78X432

Type: New construction plate
Trimless Fixed (15TL) ,
Trimless Adjustable (5TL/10TL/15TL)
Trimless Wallwash (15TL)

