

# DISPLAY LIGHTING (AM)

## Display lighting

- Micro-sized design showcase lighting
- Unique optical design, fine surface treatment
- Perfect for your boutiques & retail experience
- Emphasize the value of product





# Display lighting

The Display lighting series represents a significant advancement in small-scale innovation, specifically designed to revolutionize the lighting methodologies utilized for store windows. It ensures optimal visibility of displayed items with minimal obstruction. This elegant yet robust product features outstanding lighting performance and effectively enhances the presentation of showcased items. Equipped with the latest generation of LED light sources, available in color temperatures of 3000K and 4000K, the DIVA series guarantees high quality, efficiency, and exceptional color rendition. Its introduction fundamentally transforms the lighting paradigm for display cabinets, thereby facilitating the comprehensive showcasing of all merchandise.

Whether functioning as an essential minimalist lighting fixture or accentuating the intricate details of items, it maximizes exposure in an exemplary manner. This unique, premium-quality product offers a novel shopping experience through its innovative optical lens. It improves light distribution while minimizing glare, ensuring an optimal illumination experience.

## Types

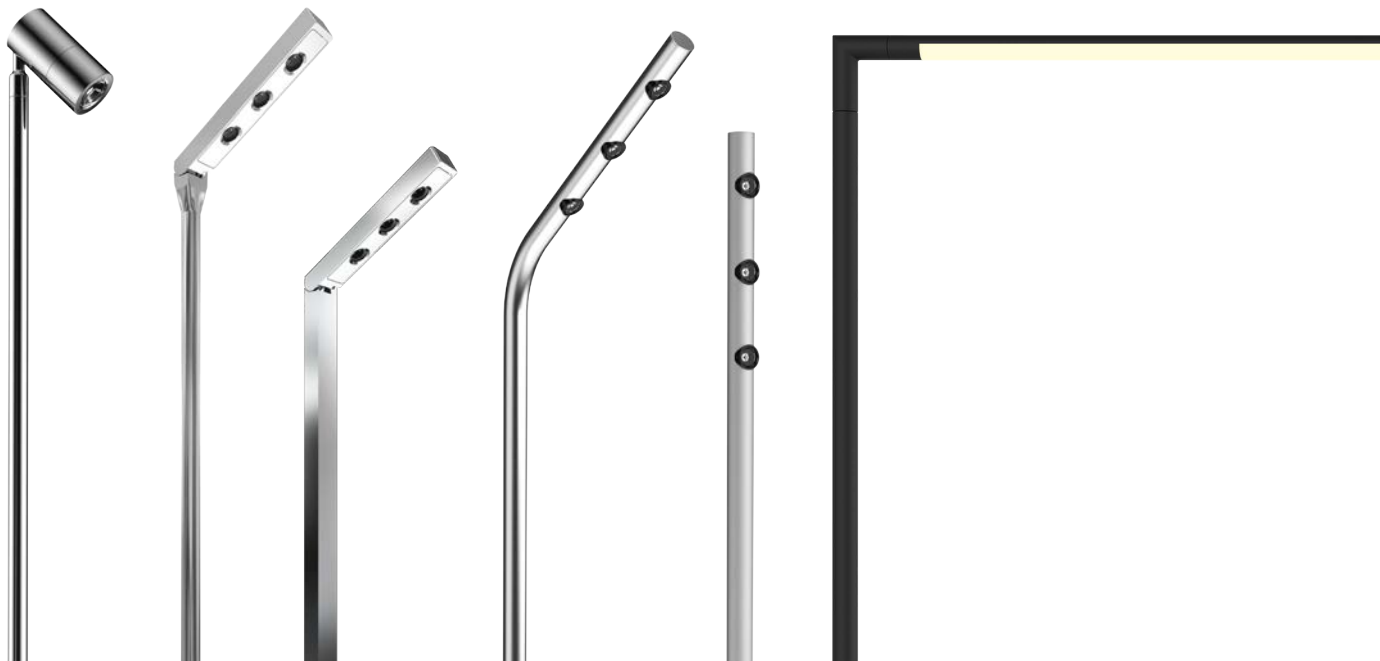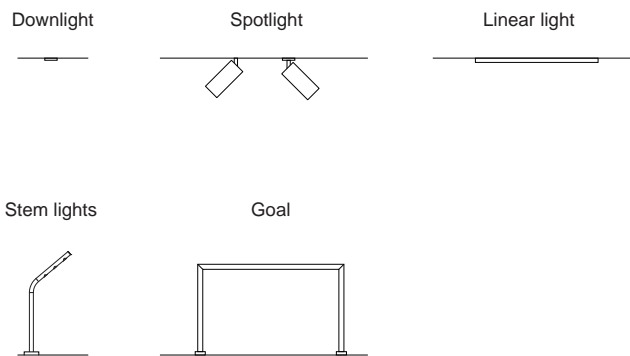



This fixture is designed for showcases and niches with diverse choices associated with a height of 12 mm. The miniature design and exquisite outfit create an ideal performance for the shelves, cabinets, niches, and showcases of associate-related businesses.




# TAURUS Fixed


TAURUS-12-F




## Colours

Body : Brass 

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.100	1W / 1W	300 mA	84 lm / 52 lm	20° (Lens)	3000K	90+




 Cut out : 10.5mm

# TAURUS Chameleon eyes


TAURUS-20-A




## Colours

Body : Brass 

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.101	1W / 1W	300 mA	84 lm / 58 lm	20° (Lens)	3000K	90+



 Cut out : 18mm



## The most robust spotlight

This recessed premium spotlight is designed to display the beauty of fine items from the showcase. Even though its size is small, this spotlight carries robust lighting capabilities and adds a touch of brilliance to your environment. Furthermore, its 360° rotation and 90° tilt versatility, grant you flexible control over lighting to ensure every detail of your items is highlighted.


Moreover, this fixture is available in two sizes to meet the most sophisticated requirements in limited spaces. It is an ideal light fixture for the retail, hospitality, and luxury residential sectors. Appreciating the exquisite design and outstanding performance, the DIVA series brings elegance and sophisticated efficiency. This will provide an extraordinary display experience with a boutique and stylish design.



Quick-install luminaire base with DC power jack



Quick-install DC Jack

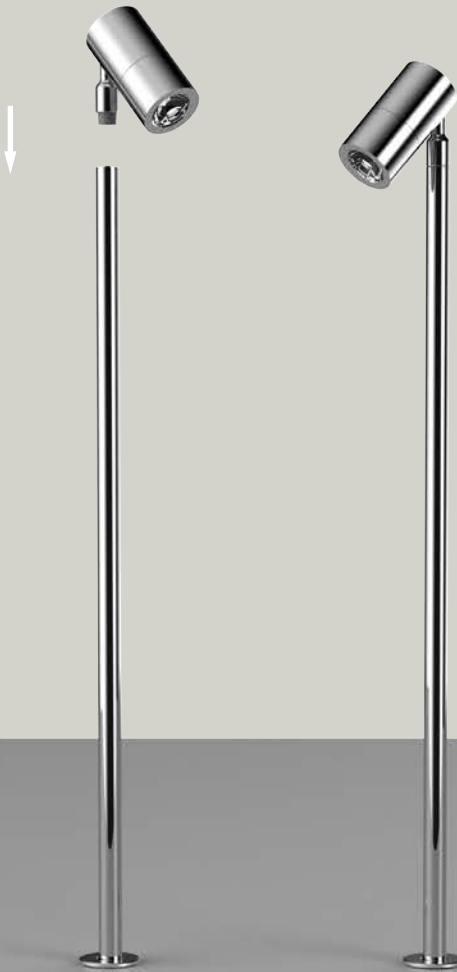

# DIVA Spotlight-13


DIVA-13-RTSP



## Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.101	1W / 1W	350 mA	125 lm / 90 lm	20°/25°/40°(Lens)	3000K	90+

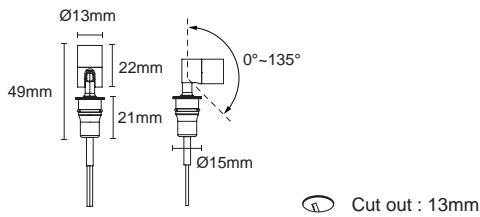

# DIVA Spotlight-15


DIVA-15-RTSP



## Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.102	1.7W / 2W	500 mA	180 lm / 140 lm	20°/30°/45°(Lens)	3000K	90+

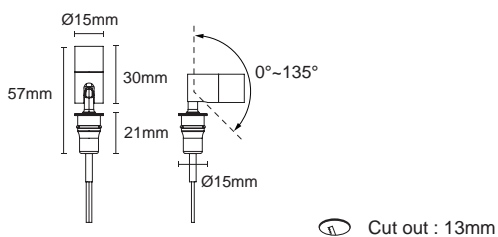

# DIVA Spotlight-21


DIVA-21-RTSP



## Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.103	2.6W / 3W	700 mA	255 lm / 210 lm	15°/25°/40°(Lens)	3000K	90+

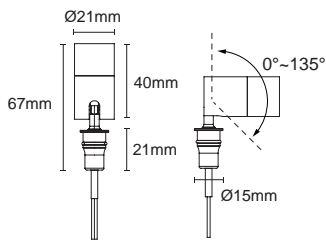

Cut out : 13mm



**"Do not hot swap"**

Ensure the power is turned off prior to installation or removal.  
Operating under live power may result in damage to the luminaire.

# DIVA Stem lights-13


DIVA-13-RSP



### Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.104B	1W / 1W	350 mA	125 lm / 90 lm	20°/25°/40°(Lens)	3000K	90+

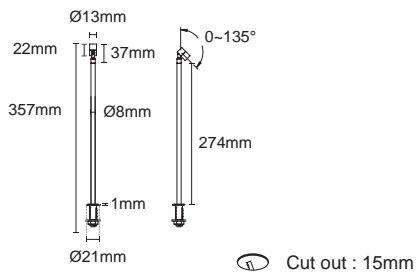

# DIVA Stem lights-15


DIVA-15-RSP



### Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.105B	1.7W	500 mA	180 lm / 140 lm	20°/30°/45°(Lens)	3000K	90+

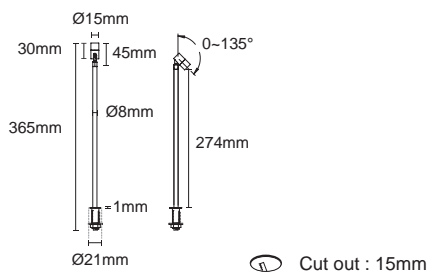

# DIVA Stem lights-21


DIVA-21-RSP



## Colours

Haze  Chrome  Black  Brass

Article number	LED / Fixture Consumption	Constant Current	LED Lumen	Beam Angle	CCT	CRI
2668.106B	2.6W	700 mA	255 lm / 210 lm	15°/25°/40°(Lens)	3000K	90+

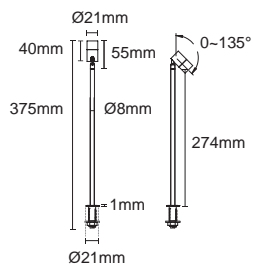

Cut out : 15mm



**"Do not hot swap"**

Ensure the power is turned off prior to installation or removal.  
Operating under live power may result in damage to the luminaire.

# Variety of styles


The diva series represents an exemplary choice for the presentation of your products. It not only showcases a visually stunning design but also provides robust functionality to enhance the appeal of your product displays. This lighting fixture is equipped with two varieties of bases, namely thin and thick, each catering to diverse display requirements and aesthetic preferences. The thin base offers a sleek, minimalist aesthetic that seamlessly integrates with the tabletop. In contrast, the thick base presents increased stability and elegance, characterized by a diamond-patterned design that imparts a sense of luxury and sophistication. The diva series produces exceptional lighting effects, accentuating the beauty and brilliance of your products. Whether utilized for commercial displays or home environments, it enables your products to emanate distinctive charm, ensuring outstanding display performance and a gratifying user experience.



# Height adjustable

Liberal and flexible 360-degree rotating and adjustment in height and base for different applications whenever you require.

Its unique adjustable function feature ensures that can adjust according to different display needs. Allowing each piece of jewelry to receive proper illumination to show its beauty and uniqueness.

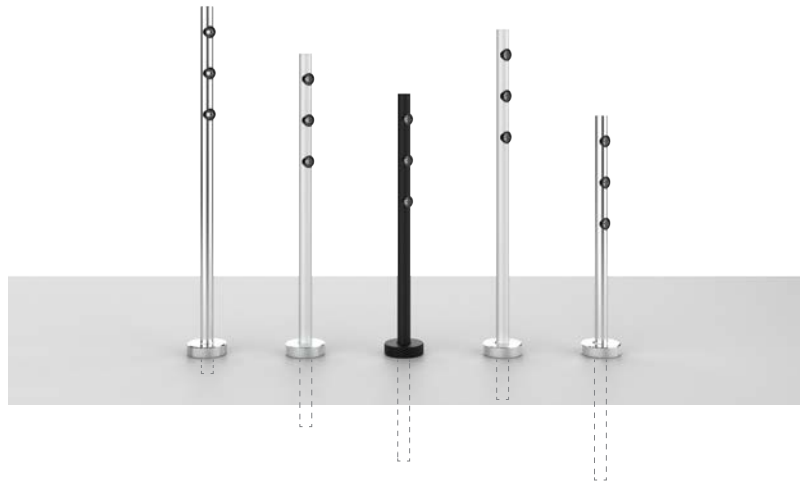





# DIVA Bend


DIVA-B



## Colours


Haze  Chrome  Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 2468.102A	3W	350 mA	270 lm	228 lm	20° (Lens)	3000K	90+
 2468.102B	3W	350 mA	270 lm	228 lm	20° (Lens)	3000K	90+

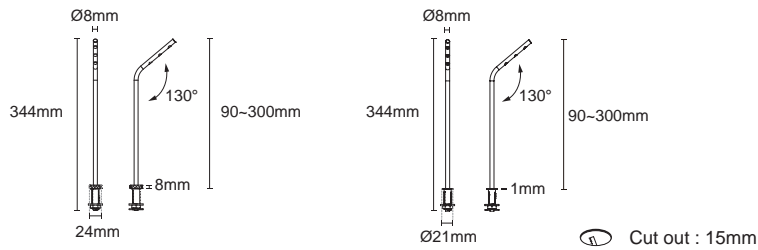



# DIVA Upright

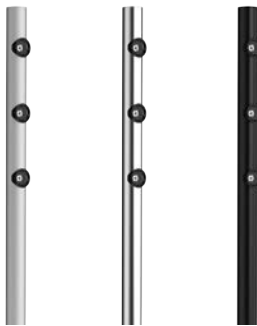
DIVA-U



## Colours

Haze  Chrome  Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 2468.103A	3W	350 mA	270 lm	228 lm	20° (Lens)	3000K	90+
 2468.103B	3W	350 mA	270 lm	228 lm	20° (Lens)	3000K	90+

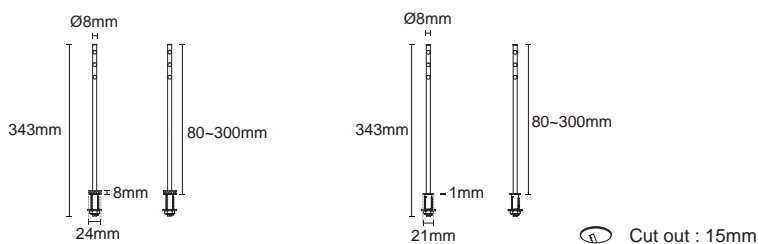

# DIVA Adjustable


DIVA-A



## Colours

Haze  Chrome  Black

Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2468.112	3W	350 mA	270 lm	-	20° (Lens)	3000K	90+

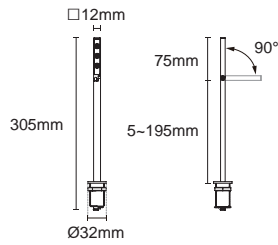

Cut out : 25mm

# DIVA Adjustable


DIVA-A1



## Colours

Haze  Chrome  Black


Article number	LED Consumption	Constant Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2568.112B	3W	350 mA	270 lm	-	20° (Lens)	3000K	90+

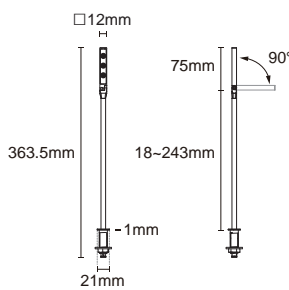

Cut out : 15mm

# Wiring diagram




Downlight & Spotlight & Stem lights




recessed  
or  
plug in




C.C.

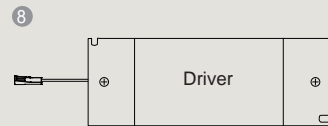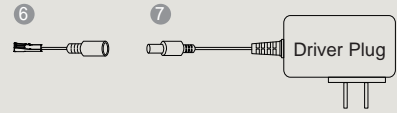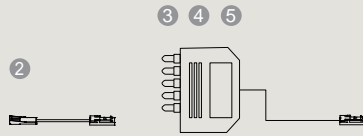



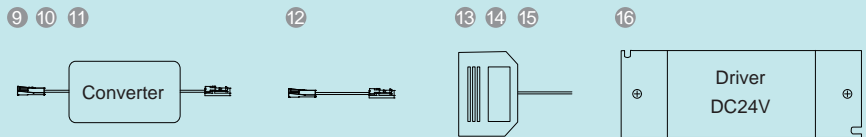



C.V.



## Accessory

	<p>CS-TQ-37-60 Type: Connection for recessed</p>	<p>Quick connector cord Length : 2.37"(6cm)</p>
---	--	---

## C.C Accessory (Constant Current)

	<p>CS-TOP3-37-150 Type: TOP junction box for recessed</p>	<p>3 way series connection cord Length : 6"(15.24cm)</p>		<p>CS-TD-37-100 Type: Driver connection for recessed and plug in</p>	<p>Driver connection cord Length : 3.94"(10cm)</p>
	<p>CS-TOP6-37-150 Type: TOP junction box for plug in</p>	<p>6 way series connection cord 3 way series connection cord Length : 6"(15.24cm)</p>		<p>CS-TT-37-910 Type: Connection for recessed and plug in</p>	<p>Connection cord Length : 36"(91.44cm)</p>
	<p>LD-PI3536AF-EU LD-PI3536AF-AM Type: Driver Plug for plug in</p>	<p>I/P: 100-240V, O/P: 350mA/3-36VDC/max.8w CE/UL/CUL 3W x 1-2 pcs</p>			
	<p>RDSL20-5001L-UN Type: Driver for plug in</p>	<p>I/P: 100-277V, O/P: 350mA/5-40VDC/max.20w CE/ENEC/CCC/CUL 3W x 1-4 pcs</p>			

## C.V Accessory (Constant Voltage)

	<p>EB-0088-300 Type: Converter for recessed</p>	<p>I/P: 24V, O/P: 300mA/max.3-9V</p>		<p>CS-TOP3-38-150 Type: TOP junction box for recessed</p>	<p>3 way parallel connection cord Length : 6"(15.24cm)</p>
	<p>EB-0088-350 Type: Converter for plug in</p>	<p>I/P: 24V, O/P: 350mA/max.3-9V</p>		<p>CS-TOP6-38-150 CS-TOP3-38-150 Type: TOP junction box for plug in</p>	<p>6 way parallel connection cord 3 way parallel connection cord Length : 6"(15.24cm)</p>
	<p>EB-0088-700 Type: Converter for recessed</p>	<p>I/P: 24V, O/P: 700mA/max.3-9V</p>		<p>AED15-24VLSTB-IP44 Type: Driver for recessed and plug in</p>	<p>I/P: 220-240V, O/P: 24VDC/max.15w CE/TUV/UKCA</p>
	<p>CS-TT-38-910 Type: Connection for recessed and plug in</p>	<p>Connection cord Length : 36"(91.44cm)</p>		<p>AED12-24VLSTB-UL Type: Driver for recessed and plug in</p>	<p>I/P: 120V, O/P: 24VDC/max.12w CE/CUL/FCC</p>


# ► Customize your modular setup

Adapting to various spaces, shapes, and sizes.


## Module options

---


Flood module

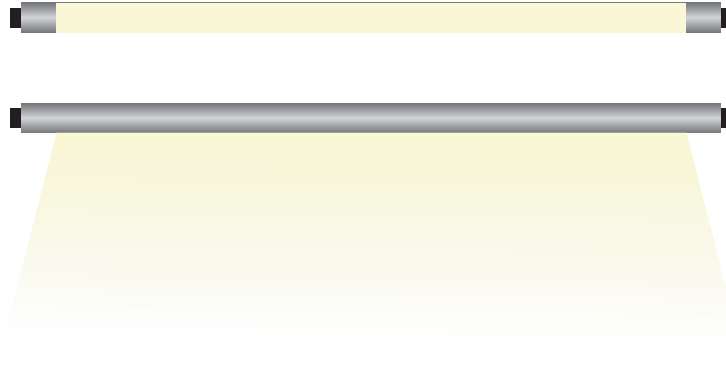



Dot module

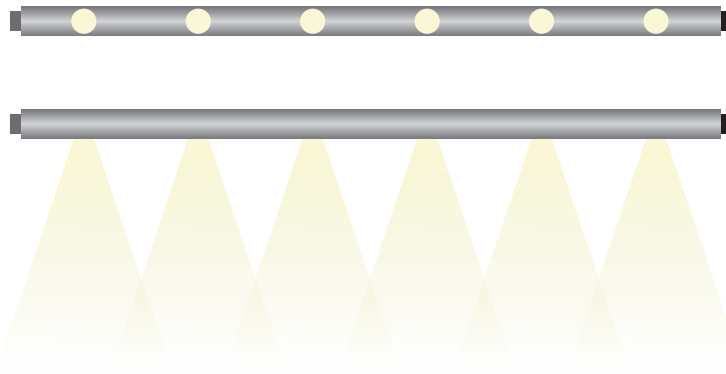

## Configuration options : Goal Light

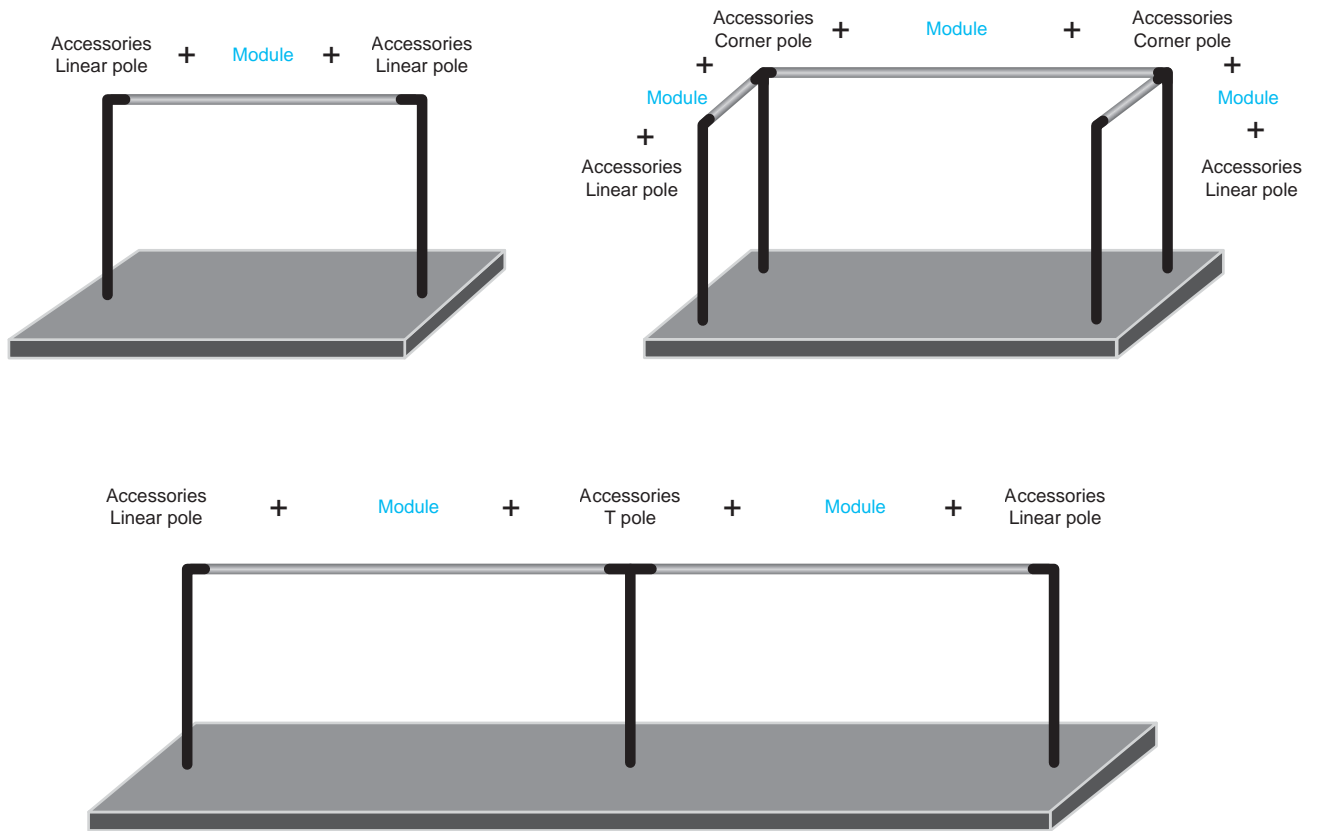


## Configuration options : Linear Light

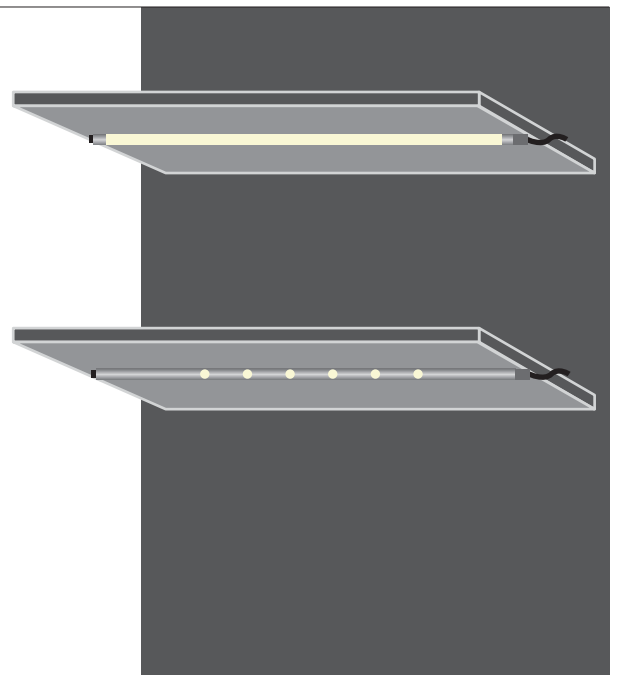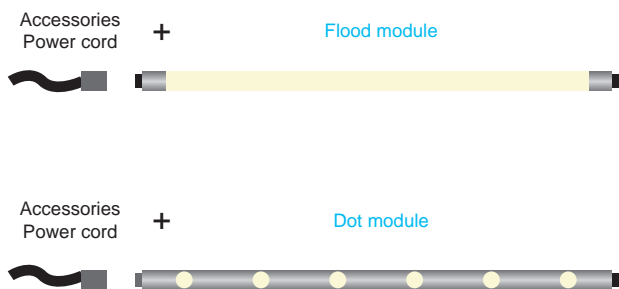


# Goal Light

The DIVA-Goal line is a supremely lightweight, sleek, and flexible fixture. It injects innovation into the world of illumination without cumbersome installation procedures. It's easy to assemble and convenient to use two vertical poles and one horizontal bar. The horizontal bar can rotate 360 degrees and offer a variety of color temperatures to swiftly refresh your space design.

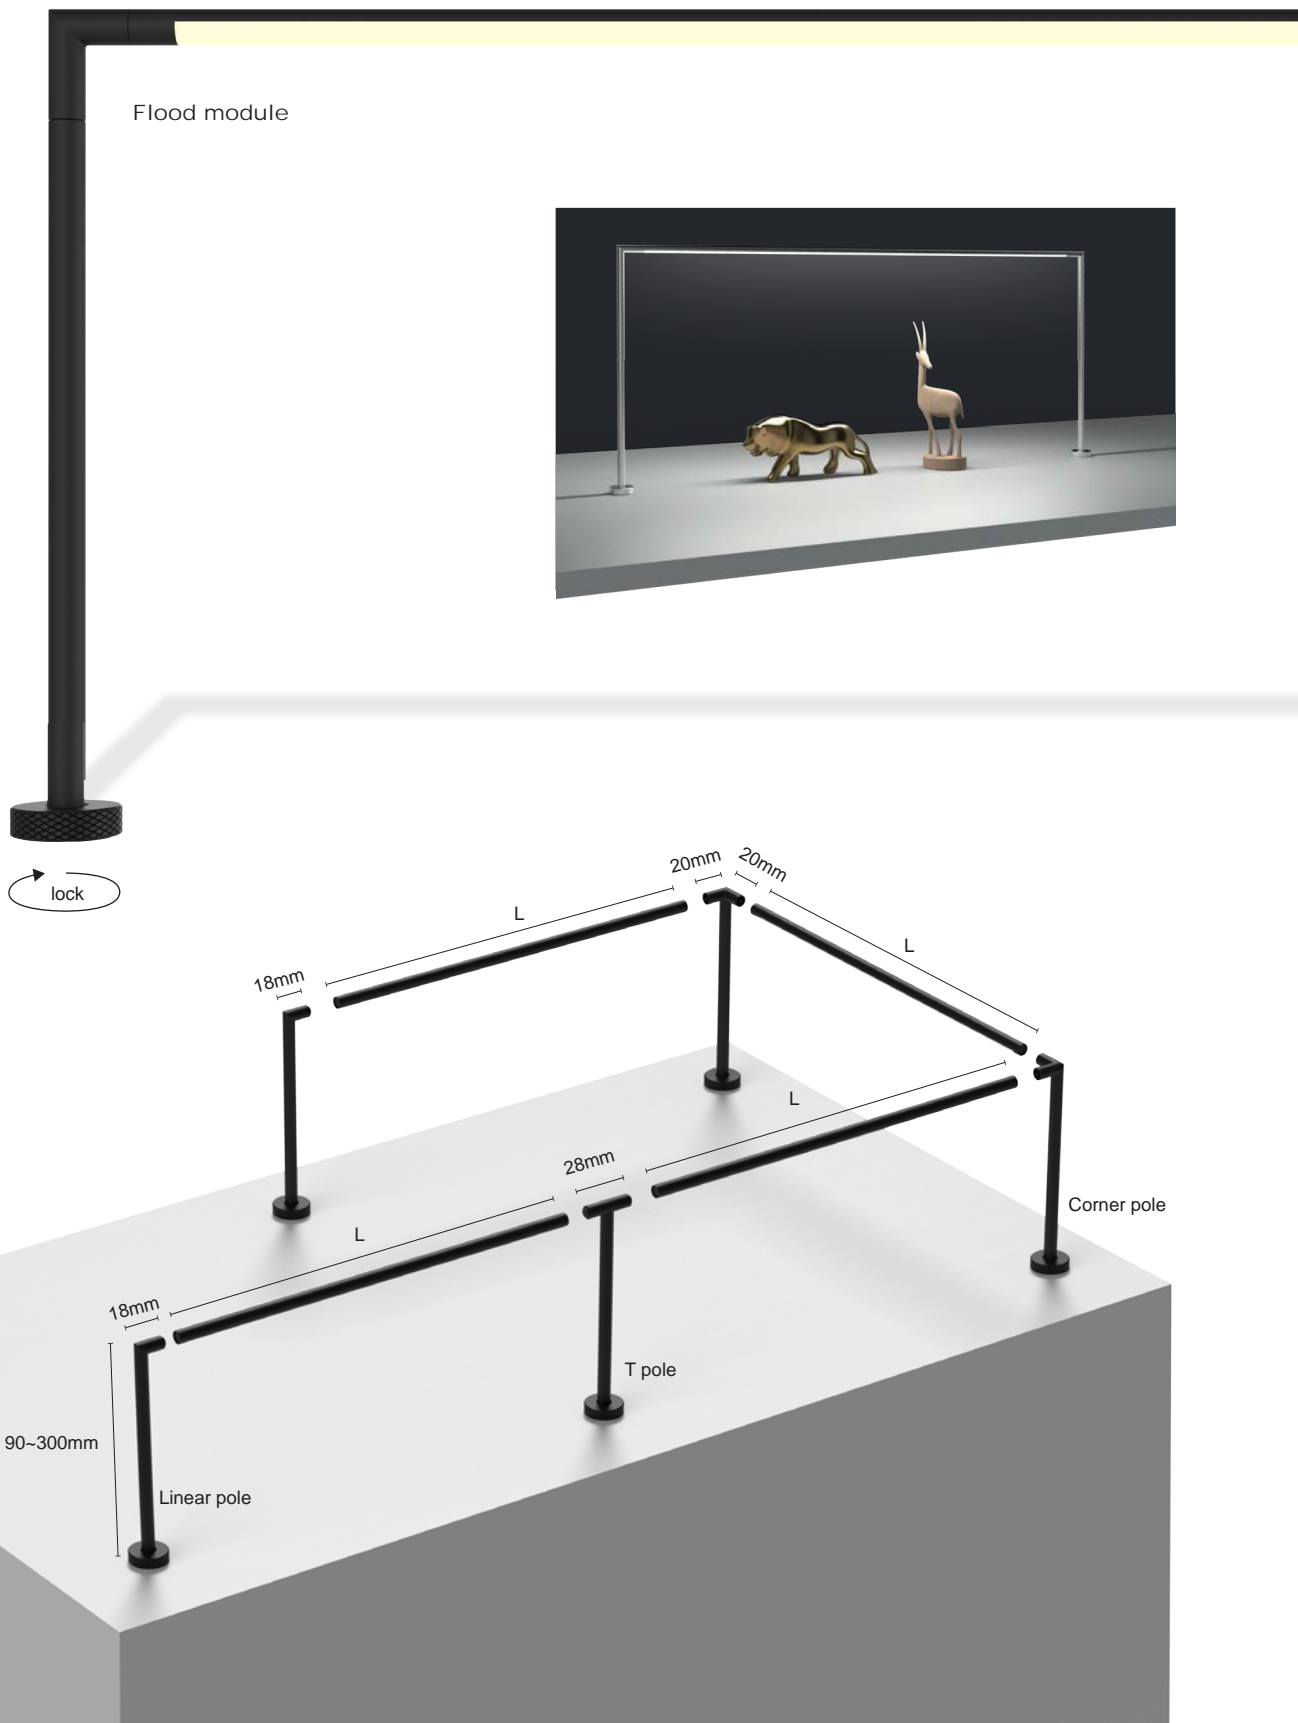


Dot module

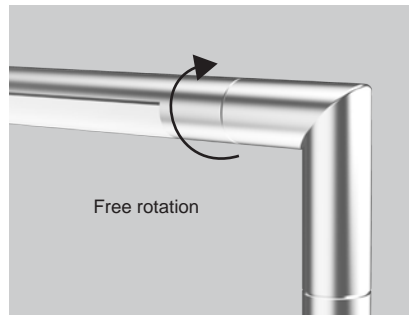


Accessories - Poles


Ⓢ Cut out : 14mm

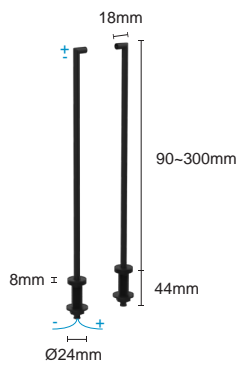

DIVA8-POLE-LA2  
Linear pole

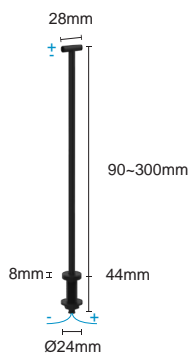

DIVA8-POLE-TA2  
T pole

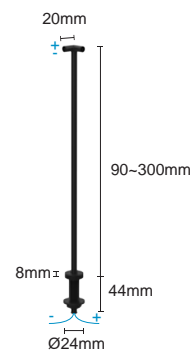

DIVA8-POLE-CA2  
Corner pole



# Linear Light

The best lighting solution for display shelves is designed to create a harmonious atmosphere and provide even light distribution, making it an ideal lighting choice.

## Flood module

This is the ideal lighting choice for creating a harmonious atmosphere and ensuring even light distribution.





### Dot module

It provides a balanced light effect with no shadow left under it. While simultaneously highlighting the most important subjects, this is the ideal solution for achieving accent lighting. The light cuts emphasize the details you want to bring out.



### Accessories - Power cord




**CP-39-200**  
Power cord  
Length:200cm



### Accessories - Chips



**NS-0746**  
Clip (Included in fixture)

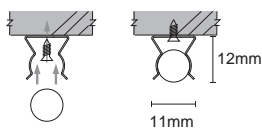

# DIVA-II Flood

DIVA-II-F




## Colours

Haze  Black

	Article number	Length (mm)	LED Consumption	Constant Voltage	LED / Delivered Lumen	Beam Angle	CCT	CRI
269	2668.107A	269	3.2W	DC24V	399 lm / 313 lm	120°	3000K	90+
	2668.107A-6	234	2.8W	DC24V	342 lm / 269 lm	120°	3000K	90+
	2668.107A-5	199	2.3W	DC24V	285 lm / 224 lm	120°	3000K	90+
	2668.107A-4	164	1.8W	DC24V	228 lm / 179 lm	120°	3000K	90+
	2668.107A-3	129	1.4W	DC24V	171 lm / 134 lm	120°	3000K	90+
	2668.107A-2	94	0.9W	DC24V	114 lm / 89 lm	120°	3000K	90+
	2668.107A-1	59	0.5W	DC24V	57 lm / 44 lm	120°	3000K	90+
549	2668.107B	549	6.9W	DC24V	855 lm / 672 lm	120°	3000K	90+
	2668.107B-7	514	6.4W	DC24V	798 lm / 627 lm	120°	3000K	90+
	2668.107B-6	479	6W	DC24V	741 lm / 583 lm	120°	3000K	90+
	2668.107B-5	444	5.5W	DC24V	684 lm / 538 lm	120°	3000K	90+
	2668.107B-4	409	5W	DC24V	627 lm / 493 lm	120°	3000K	90+
	2668.107B-3	374	4.6W	DC24V	570 lm / 448 lm	120°	3000K	90+
	2668.107B-2	339	4.1W	DC24V	513 lm / 403 lm	120°	3000K	90+
	2668.107B-1	304	3.7W	DC24V	456 lm / 358 lm	120°	3000K	90+
864	2668.107C	864	11W	DC24V	1368 lm / 1076 lm	120°	3000K	90+
	2668.107C-8	829	10.5W	DC24V	1311 lm / 1031 lm	120°	3000K	90+
	2668.107C-7	794	10.1W	DC24V	1254 lm / 986 lm	120°	3000K	90+
	2668.107C-6	759	9.6W	DC24V	1197 lm / 941 lm	120°	3000K	90+
	2668.107C-5	724	9.2W	DC24V	1140 lm / 897 lm	120°	3000K	90+
	2668.107C-4	689	8.7W	DC24V	1083 lm / 852 lm	120°	3000K	90+
	2668.107C-3	654	8.3W	DC24V	1026 lm / 807 lm	120°	3000K	90+
	2668.107C-2	619	7.8W	DC24V	969 lm / 762 lm	120°	3000K	90+
	2668.107C-1	584	7.3W	DC24V	912 lm / 717 lm	120°	3000K	90+

IP20



### Driver Accessory



AED15-24VLSTB-IP44  
Type: Driver

I/P: 220-240V,  
O/P: 24VDC/max.15w  
CE/TUV/UKCA



AED12-24VLSTB-UL  
Type: Driver

I/P: 120V,  
O/P: 24V/max.12w  
CE/CUL/FCC




### Colours

Haze  Black

	Article number	Length (mm)	LED Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
6P	2668.108A	479	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
	2668.108A-3	409	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
	2668.108A-2	339	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
	2668.108A-1	269	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
12P	2668.108B	724	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
	2668.108B-3	654	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
	2668.108B-2	584	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
	2668.108B-1	549	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
18P	2668.108C	864	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+
	2668.108C-1	794	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+

IP20



### Accessory



EB-0088-250 for 6P  
Type: Converter

I/P: 24Vdc  
O/P: 250mA/max.18V



EB-0088-500 for 12P  
Type: Converter

I/P: 24Vdc  
O/P: 500mA/max.18V



EB-0088-750 for 18P  
Type: Converter

I/P: 24Vdc  
O/P: 750mA/max.18V



AED15-250ILS  
Type: Driver

I/P: 100-240Vac,  
O/P: 250mA/18-55V/13.5W  
UL/CUL/CE/TUV/SAA



AED15-500ILS  
Type: Driver

I/P: 100-240Vac,  
O/P: 500mA/12-35V/15W  
UL/CUL/CE/TUV/SAA




SLT35-1000IL-UN  
Type: Driver


I/P: 110-277Vac,  
O/P: 750mA/2-50V/35W  
UL/CE/ENEC



6P

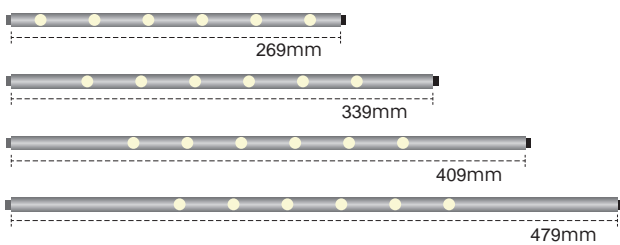

12P

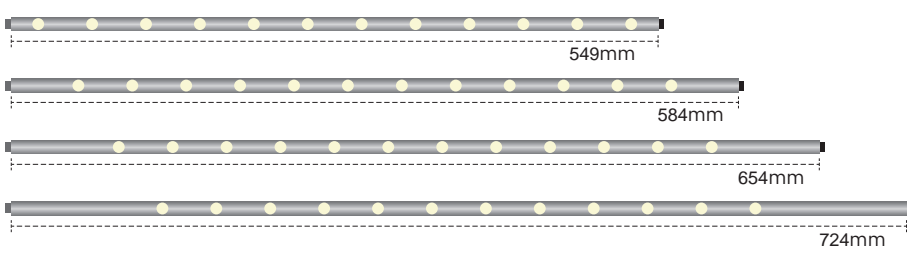

18P

