

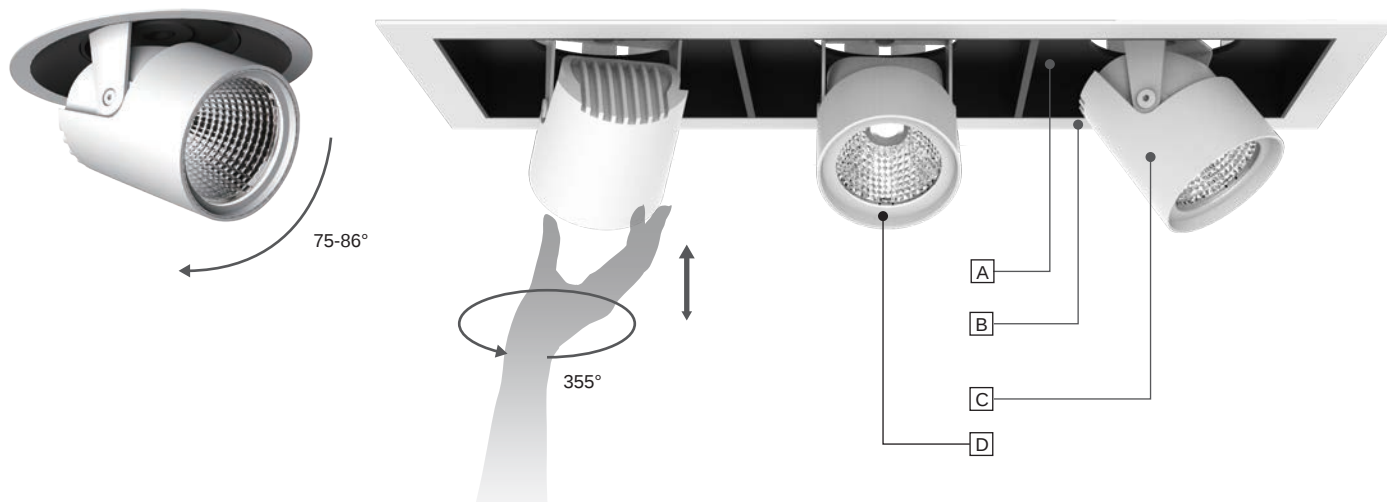


DEINO 1/2/3 (EU)



Material: Aluminum die casting heatsink & housing & trim with powder coating finish, plastic trim with liquid coating finish, plastic baffle with liquid coating or plating finish.





Color available - A / B / C / D

● Black ○ White







DEINO-64-RSP1



Article number	1819.231
LED Consumption	13W
Current	350 (mA)
Voltage	AC 120-240V
Lumen	1387 (lm)
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+

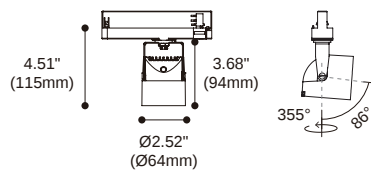Colours :  
Black White

**Dimmable**

h (m)	D (m)	E (lx)
50°		
1.0	0.87	1536
2.0	1.75	383
3.0	2.63	170
4.0	3.51	95
5.0	4.39	61




AccessoriesACDS-7
Diffusion sheet

DEINO-88-RSP1



Article number	1819.232
LED Consumption	26W
Current	700 (mA)
Voltage	AC 120-240V
Lumen	2670 (lm)
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+

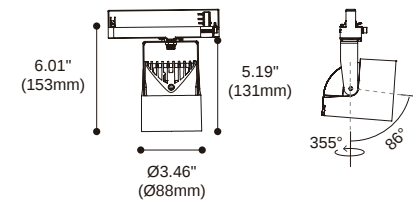Colours :  
Black White

**Dimmable**

h (m)	D (m)	E (lx)
35°		
1.0	0.61	5777
2.0	1.22	1444
3.0	1.83	641
4.0	2.44	361
5.0	3.05	231




AccessoriesDS7-2
Diffusion sheet

DEINO-64-RSP2



Article number	1619.208
LED Consumption	13W
Current	350 (mA)
Voltage	AC 100-240V
Lumen	1387 (lm)
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+

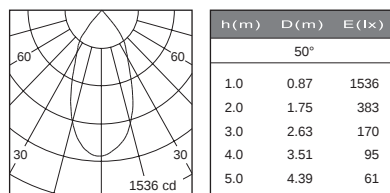Colours :  
Black White





**Dimmable****Accessories**ACDS-7
Diffusion sheet

DEINO-88-RSP2



Article number	1619.209
LED Consumption	26W
Current	700 (mA)
Voltage	AC 100-240V
Lumen	2670 (lm)
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+

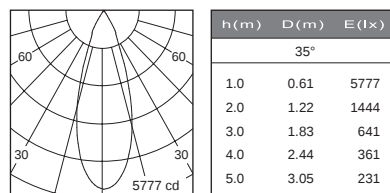Colours :  
Black White



**Dimmable****Accessories**DS7-2
Diffusion sheet

DEINO-120-RSP2



Article number	1619.210
LED Consumption	40W
Current	1050 (mA)
Voltage	AC 220-240V
Lumen	4058 (lm)
Beam Angle	12°/24°/40° (Reflector)
CCT	3000K
CRI	90+


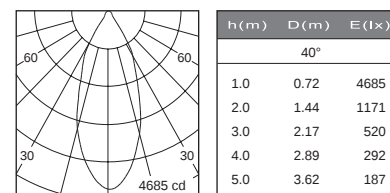

Colours :  
Black White

**Dimmable**

DEINO-64-RTSP




Article number	1618.156
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+



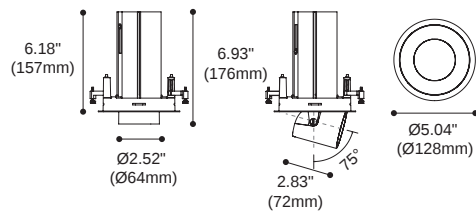
**Dimmable**

h (m)	D (m)	E (lx)
	50°	
1.0	0.87	1444
2.0	1.75	361
3.0	2.62	160
4.0	3.50	90
5.0	4.38	57

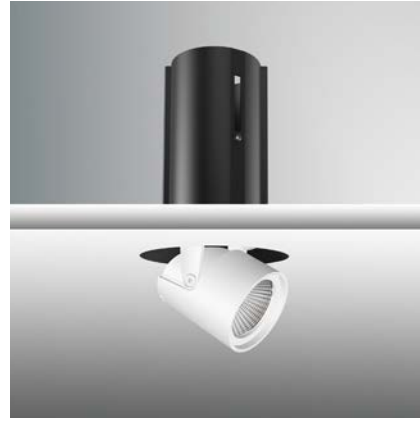DEINO-64-RTLSP



Article number	1618.233
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+

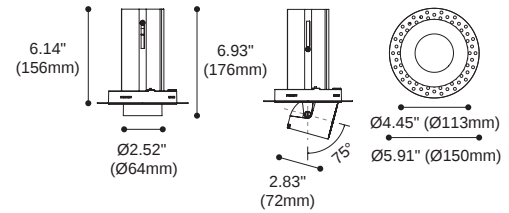**Dimmable**

h (m)	D (m)	E (lx)
	50°	
1.0	0.87	1444
2.0	1.75	361
3.0	2.62	160
4.0	3.50	90
5.0	4.38	57

AccessoriesACDS-7
Diffusion sheet



DEINO-88-RTSP



Article number	1618.157
LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+



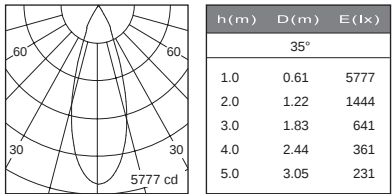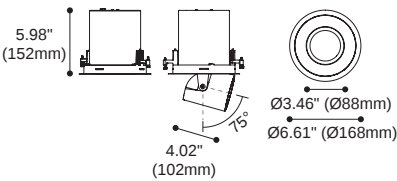Dimmable



h (m)	D (m)	E (lx)
35°		
1.0	0.61	5777
2.0	1.22	1444
3.0	1.83	641
4.0	2.44	361
5.0	3.05	231



DEINO-88-RTLSP



Article number	1618.234
LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+



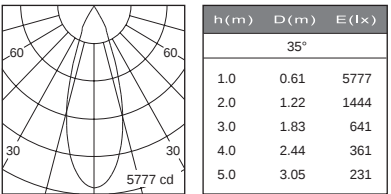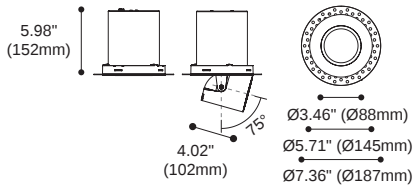Dimmable



h (m)	D (m)	E (lx)
35°		
1.0	0.61	5777
2.0	1.22	1444
3.0	1.83	641
4.0	2.44	361
5.0	3.05	231

Accessories



DS7-2
Diffusion sheet

DEINO-64-STSP1



Article number	2014.438-1
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+

DEINO-64-STSP2



Article number	2014.438-2
LED Consumption	13W x2
Current	350 (mA)
Lumen	1387 (lm)x2
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+



DEINO-64-STSP3




Article number	2014.438-3
LED Consumption	13W x3
Current	350 (mA)
Lumen	1387 (lm)x3
Beam Angle	15°/25°/40°/50° (Reflector)
CCT	3000K
CRI	90+




Dimmable



Dimmable



Dimmable



Accessories



ACDS-7
Diffusion sheet


DEINO-88-STSP1



Article number	2014.439-1
LED Consumption	26W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+



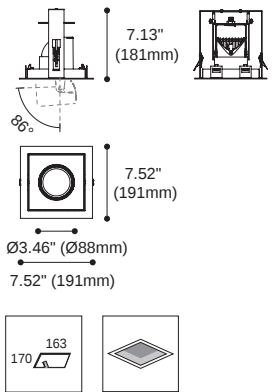Dimmable




DEINO-88-STSP2



Article number	2014.439-2
LED Consumption	26W x2
Current	700 (mA)
Lumen	2670 (lm) x2
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+



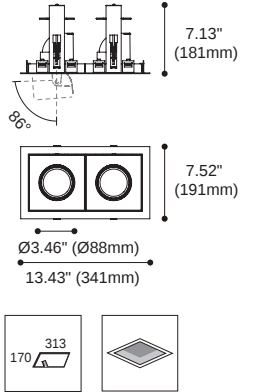Dimmable




DEINO-88-STSP3



Article number	2014.439-3
LED Consumption	26W x3
Current	700 (mA)
Lumen	2670 (lm) x3
Beam Angle	15°/25°/35° (Reflector)
CCT	3000K
CRI	90+



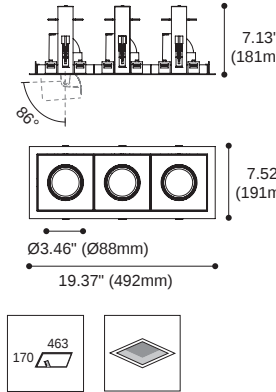Dimmable



Accessories



DS7-2
Diffusion sheet