

HADES-II SERIES (EU)



HADES-II (EU)

Multiple series designed with different wattages and modules to choose from. With high performance output to fulfill the applications required by designers, a good alternatives for retrofit and new design. The mixed of modules allow the designers to create and achieve the lighting needs. HADES can be sold in complete fixture or separate as parts for different types of purchasing needs. It is suitable for both commercial and residential applications.

Shape




1 lamp
85



1 lamp
85



2 lamp
85



3 lamp
85

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable

NATUZZI
Location: Taiwan 2017







NATUZZI
Location: Taiwan 2017



HADES-II (S)

HADES-SF-108-RTA





Article number	1418.107
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

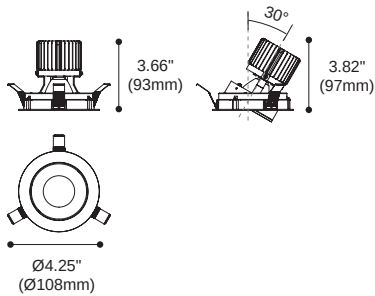

HADES-II (B)

HADES-BF-152-RTA-2





Article number	1418.130
LED Consumption	26W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

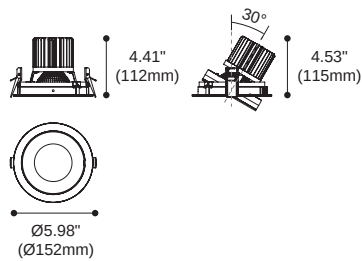

h (m)	D (m)	E (lx)
30°		
1.0	0.47	5325
2.0	0.95	1331
3.0	1.42	591
4.0	1.90	332
5.0	2.38	213

HADES-BF-152-RTA-1




Article number	1418.150
LED Consumption	40W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

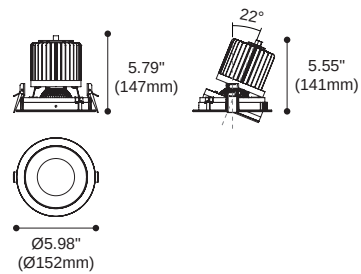

HADES-II (S)

HADES-SF-STA1-1







Article number	2014.418-1
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



h (m)	D (m)	E (lx)
	40°	
1.0	0.69	4886
2.0	1.39	1222
3.0	2.09	542
4.0	2.79	305
5.0	3.49	195

HADES-SF-STA2-1







Article number	2014.418-2
LED Consumption	13W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



h (m)	D (m)	E (lx)
	40°	
1.0	0.69	4886
2.0	1.39	1222
3.0	2.09	542
4.0	2.79	305
5.0	3.49	195

HADES-SF-STA3-1







Article number	2014.418-3
LED Consumption	13W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable







h (m)	D (m)	E (lx)
	40°	
1.0	0.69	4886
2.0	1.39	1222
3.0	2.09	542
4.0	2.79	305
5.0	3.49	195

HADES-SF-STLA1



Article number	1414.433-1
LED Consumption	13W
Current	350 (mA)
Lumen	1387 (lm)
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White

**Dimmable**





h(m)	D(m)	E(lx)
	40°	
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86

HADES-SF-STLA2



Article number	1414.433-2
LED Consumption	13W X2
Current	350 (mA)
Lumen	1387 (lm) X2
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White

**Dimmable**





h(m)	D(m)	E(lx)
	40°	
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86

HADES-SF-STLA3



Article number	1414.433-3
LED Consumption	13W X3
Current	350 (mA)
Lumen	1387 (lm) X3
Beam Angle	30°/40°
CCT	3000K
CRI	90+

Colours :  
Black White

**Dimmable**

h(m)	D(m)	E(lx)
	40°	
1.0	0.68	2161
2.0	1.37	540
3.0	2.05	240
4.0	2.74	135
5.0	3.42	86

HADES-II (B)

HADES-BF-STA1-2






Article number	2014.410-1
LED Consumption	26W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

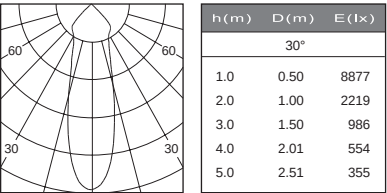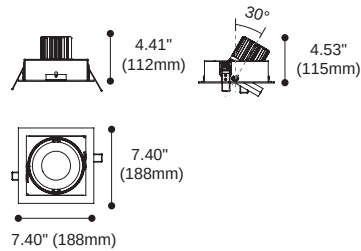

HADES-BF-STA2-2





Article number	2014.410-2
LED Consumption	26W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

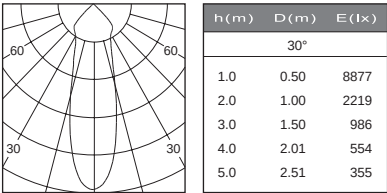

HADES-BF-STA3-2






Article number	2014.410-3
LED Consumption	26W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/30°
CCT	3000K
CRI	90+

Colours :  
Black White






Dimmable

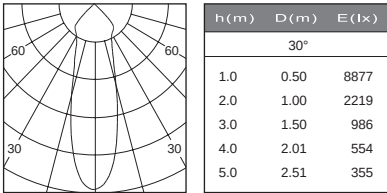

HADES-BF-STLA1-2






Article number	1414.419-1
LED Consumption	26W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/30°
CCT	3000K
CRI	90+
Colours :  	
Black White	

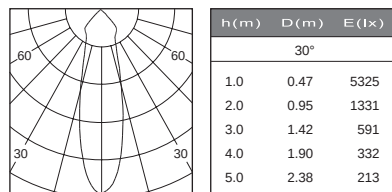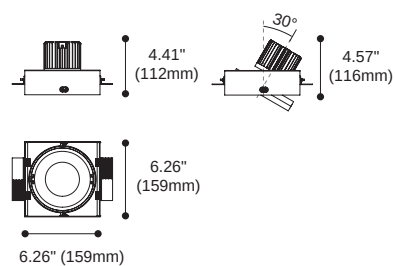**Dimmable**

HADES-BF-STLA2-2






Article number	1414.419-2
LED Consumption	26W X2
Current	700 (mA)
Lumen	2670 (lm) X2
Beam Angle	10°/30°
CCT	3000K
CRI	90+
Colours :  	
Black White	

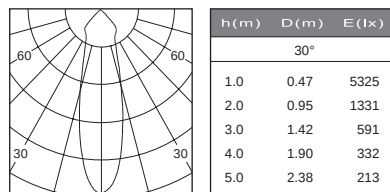**Dimmable**

HADES-BF-STLA3-2



Article number	1414.419-3
LED Consumption	26W X3
Current	700 (mA)
Lumen	2670 (lm) X3
Beam Angle	10°/30°
CCT	3000K
CRI	90+
Colours :  	
Black White	

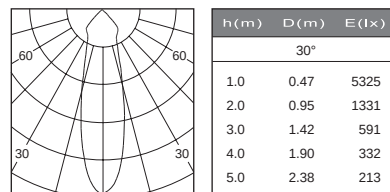**Dimmable**

HADES-II (B)

HADES-BF-STA1-1





Article number	2014.411-1
LED Consumption	40W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

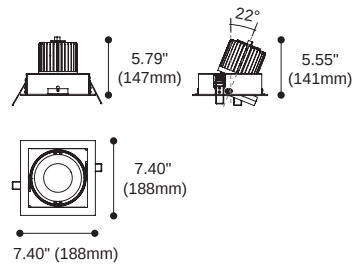

HADES-BF-STA2-1





Article number	2014.411-2
LED Consumption	40W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



HADES-BF-STA3-1




Article number	2014.411-3
LED Consumption	40W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



HADES-BF-STLA1-1





Article number	1414.453-1
LED Consumption	40W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

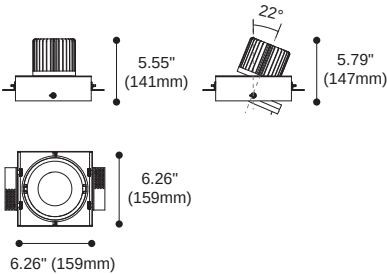

HADES-BF-STLA2-1





Article number	1414.453-2
LED Consumption	40W X2
Current	1050 (mA)
Lumen	4058 (lm) X2
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



HADES-BF-STLA3-1



Article number	1414.453-3
LED Consumption	40W X3
Current	1050 (mA)
Lumen	4058 (lm) X3
Beam Angle	15°/40°
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

