

WALLED SERIES (EU)




WALLED (EU)


Material: Aluminum forging heatsink with anodized black finish, aluminum die casting housing with powder coating finish.

The extra-thin trim make it smooth to the ceiling just feel like trimless, easy installation perfectly suitable for commercial space.


Shape



Mountings



Light distributions






WALLED-EYE-S-LED



Article number	2218.131
LED Consumption	26W
Current	700 (mA)
Delivered Lumen	1924 (lm)
Beam Angle	20°/50° (Reflector)
CCT	3000K
CRI	90+

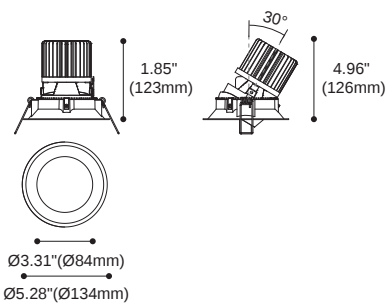Colours  
Black White

**Dimmable**




h(m)	D(m)	E(lx)
	20°	
1.0	0.38	7496
2.0	0.76	1874
3.0	1.13	832
4.0	1.51	468
5.0	1.89	299

WALLED-FLAT-S-LED



Article number	2218.130
LED Consumption	26W
Current	700 (mA)
Delivered Lumen	2029 (lm)
Beam Angle	15°/30° (Reflector)
CCT	3000K
CRI	90+

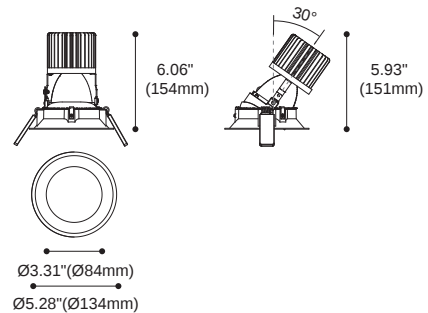Colours  
Black White


**Dimmable**

h(m)	D(m)	E(lx)
	30°	
1.0	0.56	5236
2.0	1.13	1309
3.0	1.69	581
4.0	2.25	327
5.0	2.82	209


WALLED-EYE-B-LED



Article number	2218.133
LED Consumption	40W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	20°/40° (Reflector)
CCT	3000K
CRI	90+
Colours	  Black White



Dimmable

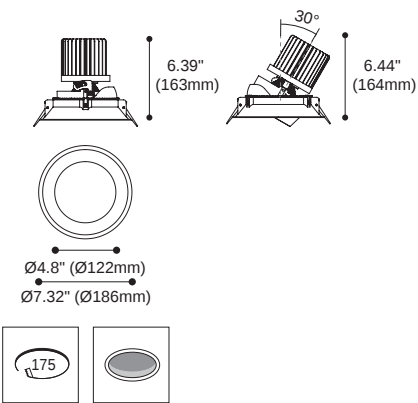

WALLED-FLAT-B-LED



Article number	2218.132
LED Consumption	40W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	20°/40° (Reflector)
CCT	3000K
CRI	90+
Colours	  Black White



Dimmable

