

AQUA SERIES (EU)

AQUA series is designed with powerful IP65 function, along with soft and bright visual effects, creating the interaction of light and shadow, fully presenting the charm of the space. Aqua series is ideal for entrance, stairway, bathrooms and outdoor corridor.

Material: Aluminum die cast heatsink, aluminum die cast trim, trim can be made into black & white.





This waterproof recessed light is designed for humid environments, making it perfect for bathrooms, kitchens, balconies, and corridors. It offers reliable, efficient lighting and comes in three sizes: large, medium, and small, to fit various spaces. Whether for a cozy ambiance or functional lighting, this light is an excellent choice to brighten any area.







Colours

Bezel : Black ☒ White ☐


Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 2118.147	13W	350 mA	1332 lm	858 lm	24°/45° (Reflector)	3000K	90+

Dimmable

 TRIAC 1-10V

 IP65

Optional Accessory



honeycomb louver




Waterproof junction box

IES

 24°

Fixed UGR<13



2118.147

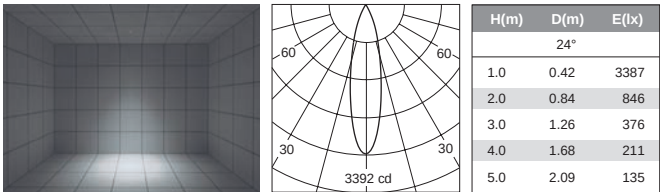

 45°

Fixed UGR<19

2118.147

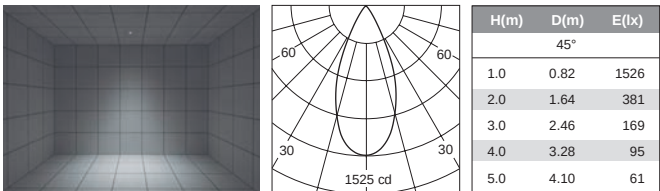



Colours


Bezel : Black ☒ White ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 2118.148-HE	15W	450 mA	2445 lm	1845 lm	45°/60° (Reflector)	3000K	90+

Dimmable



Optional Accessory



honeycomb louver





Waterproof junction box

IES




Fixed UGR<19

2118.148-HE



H(m)	D(m)	E(lx)
45°		
1.0	0.85	3084
2.0	1.71	771
3.0	2.56	342
4.0	3.42	192
5.0	4.27	123





Cut out : 110mm



Fixed UGR<19

2118.148-HE



H(m)	D(m)	E(lx)
60°		
1.0	1.12	2241
2.0	2.23	560
3.0	3.35	249
4.0	4.47	140
5.0	5.58	89



Colours


Bezel : Black ☒ White ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
 2318.185-HE	25W	750 mA	4076 lm	2979 lm	48°/66° (Reflector)	3000K	90+

Dimmable



Optional Accessory



honeycomb louver



Waterproof junction box



IES



48°

Fixed UGR<16

2318.185-HE





H(m)	D(m)	E(lx)
48°		
1.0	0.90	4734
2.0	1.80	1183
3.0	2.70	526
4.0	3.61	295
5.0	4.51	189




66°

Fixed UGR<19

2318.185-HE



H(m)	D(m)	E(lx)
66°		
1.0	1.29	2722
2.0	2.58	680
3.0	3.87	302
4.0	5.17	170
5.0	6.46	108



Cut out : 130mm

