
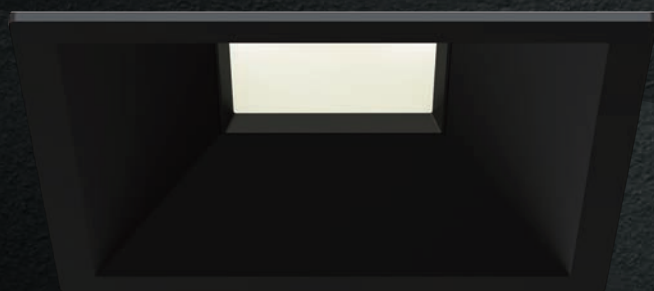


BRANKO SERIES (EU)

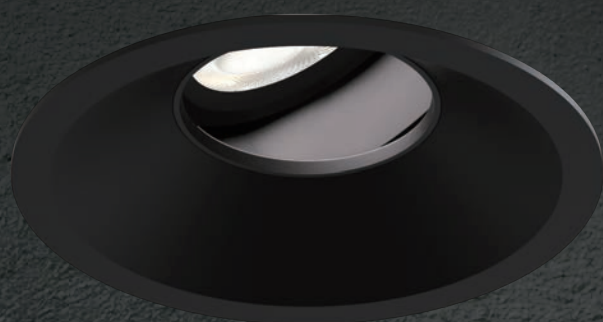

BRANKO (EU)

Invisibility : This lighting fixture boasts a unique design that seamlessly integrates with the ceiling, remaining virtually invisible. It creates an understated lighting effect without drawing attention to itself.

Low UGR : $UGR < 10$, providing a soft and even illumination for a comfortable lighting environment, and minimizing discomfort and fatigue to eyes



Versatile Application : The fixture's discreet and gentle lighting makes it well-suited for various settings, including residential spaces and hospitality environments. It complements these spaces by offering unobtrusive yet effective lighting.

In summary, this invisible lighting fixture combines subtlety with functionality, offering a comfortable and inconspicuous lighting solution suitable for diverse environments.



Cone



It is a multifunctional accent light that can highlight a single object or architectural element. Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

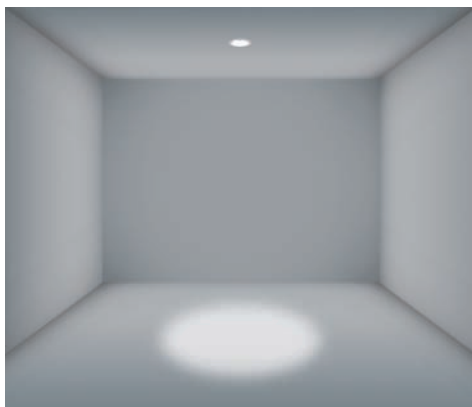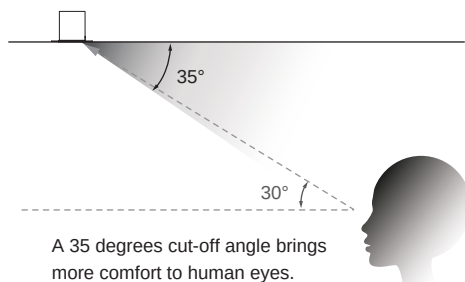

Pinhole

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

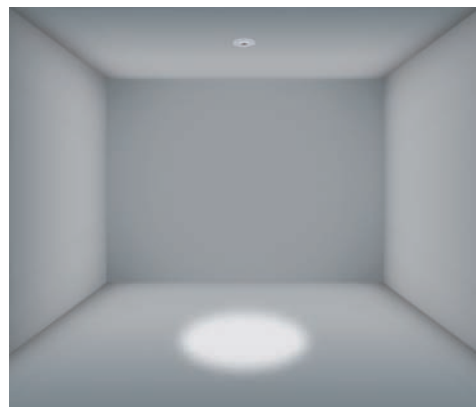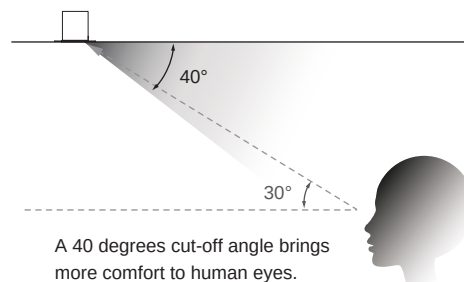

BRANKO
Recessed downlights



ACOT-68



ACOT-69-WCW
Tunable white



ACOT-70
ACOT-70A Narrow beam
ACOT-70-WCW Tunable white

Round

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable
Cone				
Trim-A				
Trim-B				
Trimless				
Pinhole				
Trim-A				
Trim-B				
Trimless				

Square

Cone				
Trim-A				
Trim-B				
Trimless				
Pinhole				
Trim-A				
Trim-B				
Trimless				



LEE-15
LEE-15A Narrow beam
LEE-15-DW Dim to warm



ACOT-72
ACOT-72-WCW Tunable white

110
Fixed

110
Adjustable

Cone

Trim-A



Trim-B



Trimless



Pinhole

Trim-A



Trim-B



Trimless



Cone

Trim-A



Trim-B



Trimless



Pinhole

Trim-A



Trim-B



Trimless









BRANKO 65



Round

Fixed

Adjustable

BRANKO-65 Round-Fixed-Cone



BRANKO A-65C-RTF
BRANKO B-65C-RTF
BRANKO B-65C-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.125-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.125-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.116-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.116-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.210F-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.210F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable



Optional Accessory




2318.116-ACOT-68




 Cut out : 60mm (Trim-B)

2318.116-ACOT-69-WCW




 Cut out : 60mm (Trim-B)

2318.210F-ACOT-68



 Cut out : 60mm (Trimless)

2318.210F-ACOT-69-WCW





 Cut out : 60mm (Trimless)

IES



Fixed UGR<9

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.29	2020
2.0	0.58	505
3.0	0.87	224
4.0	1.16	126
5.0	1.46	80



Fixed UGR<8

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.39	1648
2.0	0.77	412
3.0	1.16	183
4.0	1.54	103
5.0	1.93	65



Fixed UGR<13

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.62	954
2.0	1.24	238
3.0	1.86	106
4.0	2.47	59
5.0	3.09	38



Fixed UGR<18

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.72	760
2.0	1.44	190
3.0	2.16	84
4.0	2.87	47
5.0	3.59	30

BRANKO-65 Round-Adjustable-Cone

BRANKO A-65C-RTA
BRANKO B-65C-RTA
BRANKO B-65C-RTLA





Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.126-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.126-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.117-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.117-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.211F-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.211F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable



Optional Accessory




2318.117-ACOT-68




 Cut out : 60mm (Trim-B)

2318.117-ACOT-69-WCW




 Cut out : 60mm (Trim-B)

2318.211F-ACOT-68



 Cut out : 60mm (Trimless)

2318.211F-ACOT-69-WCW





 Cut out : 60mm (Trimless)

IES



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.30	2066
2.0	0.60	516
3.0	0.90	229
4.0	1.20	129
5.0	1.50	82



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.41	1777
2.0	0.83	444
3.0	1.24	197
4.0	1.66	111
5.0	2.07	71



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.62	937
2.0	1.24	234
3.0	1.86	104
4.0	2.48	58
5.0	3.11	37



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.75	718
2.0	1.50	179
3.0	2.25	79
4.0	3.00	44
5.0	3.75	28

BRANKO-65 Round-Fixed-Pinhole



BRANKO A-65P-RTF
BRANKO B-65P-RTF
BRANKO B-65P-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.118-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.118-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.120-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.120-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.212F-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.212F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




2318.120-ACOT-68




2318.120-ACOT-69-WCW



2318.212F-ACOT-68



2318.212F-ACOT-69-WCW





IES



Fixed UGR<8

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.27	2150
2.0	0.53	537
3.0	0.80	238
4.0	1.06	134
5.0	1.33	85



Fixed UGR<7

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
24°		
1.0	0.39	1796
2.0	0.78	449
3.0	1.16	199
4.0	1.55	112
5.0	1.94	71



Fixed UGR<14

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
30°		
1.0	0.56	1012
2.0	1.12	252
3.0	1.68	112
4.0	2.24	63
5.0	2.80	40



Fixed UGR<20

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68



H(m)	D(m)	E(lx)
35°		
1.0	0.66	730
2.0	1.31	182
3.0	1.96	81
4.0	2.62	45
5.0	3.37	29

BRANKO-65 Round-Adjustable-Pinhole


BRANKO A-65P-RTA
BRANKO B-65P-RTA
BRANKO B-65P-RTLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.119-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.119-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.121-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.121-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.213F-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.213F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+



 Cut out : 55mm (Trim-A)




 Cut out : 55mm (Trim-A)


Dimmable



Optional Accessory




2318.121-ACOT-68




 Cut out : 60mm (Trim-B)

2318.121-ACOT-69-WCW




 Cut out : 60mm (Trim-B)

2318.213F-ACOT-68



 Cut out : 60mm (Trimless)

2318.213F-ACOT-69-WCW



 Cut out : 60mm (Trimless)



IES



15°

Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.28	2171
2.0	0.56	542
3.0	0.83	241
4.0	1.11	135
5.0	1.39	86



25°

Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.39	1698
2.0	0.77	424
3.0	1.16	188
4.0	1.54	106
5.0	1.93	67



35°

Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.58	933
2.0	1.17	233
3.0	1.75	109
4.0	2.34	58
5.0	2.92	37



40°

Adjustable

2118.174-ACOT-68
2118.267F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.69	734
2.0	1.38	183
3.0	2.07	81
4.0	2.76	45
5.0	3.46	29



BRANKO 85



Round / Square

Fixed
Adjustable

BRANKO-85 Round-Fixed-Cone

BRANKO A-85C-RTF
BRANKO B-85C-RTF
BRANKO B-85C-RTLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.127-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.127-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.127-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



	2318.110-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.110-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.110-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



	2318.206F-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.206F-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.206F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable






Optional Accessory



ACHO-5
Honeycomb louver



ACOT-108
Suction cup (for trimless)





IES



Fixed UGR<10

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2657
2.0	0.94	664
3.0	1.41	295
4.0	1.88	166
5.0	2.35	106



Fixed UGR<9

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
35°		
1.0	0.60	2217
2.0	1.19	554
3.0	1.79	246
4.0	2.38	138
5.0	2.98	88



Fixed UGR<15

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.83	1271
2.0	1.67	317
3.0	2.50	141
4.0	3.34	79
5.0	4.17	50



Fixed UGR<20

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
55°		
1.0	1.04	852
2.0	2.09	213
3.0	3.13	94
4.0	4.18	53
5.0	5.22	34



Fixed UGR<7

2318.127-ACOT-70A
2318.110-ACOT-70A
2318.206F-ACOT-70A



H(m)	D(m)	E(lx)
10°		
1.0	0.18	4146
2.0	0.36	1037
3.0	0.55	460
4.0	0.73	259
5.0	0.91	165

BRANKO-85 Round-Adjustable-Cone

BRANKO A-85C-RTA
BRANKO B-85C-RTA
BRANKO B-85C-RTLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.128-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.128-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.128-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



	2318.111-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.111-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.111-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



	2318.207F-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.207F-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.207F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver




S-007
Snoot



 Cut out : 75mm (Trim-A)



 Cut out : 80mm (Trim-B)





 Cut out : 80mm (Trimless)

IES



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2267
2.0	0.94	666
3.0	1.41	296
4.0	1.88	166
5.0	2.35	106



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
35°		
1.0	0.59	2168
2.0	1.18	542
3.0	1.76	240
4.0	2.35	135
5.0	2.94	86



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.83	1263
2.0	1.66	315
3.0	2.49	140
4.0	3.32	78
5.0	4.15	50



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
55°		
1.0	1.04	842
2.0	2.08	210
3.0	3.13	93
4.0	4.17	52
5.0	5.21	33



Adjustable

2318.128-ACOT-70A
2318.111-ACOT-70A
2318.207F-ACOT-70A



H(m)	D(m)	E(lx)
10°		
1.0	0.18	4229
2.0	0.37	1057
3.0	0.55	469
4.0	0.74	246
5.0	0.92	169

BRANKO-85 Round-Fixed-Pinhole

BRANKO A-85P-RTF
BRANKO B-85P-RTF
BRANKO B-85P-RTLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.112-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.112-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.112-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



	2318.114-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.114-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.114-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



	2318.208F-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.208F-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.208F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+






Dimmable






Optional Accessory






ACHO-5
Honeycomb louver






IES






H(m)	D(m)	E(lx)
25°		
1.0	0.42	2810
2.0	0.85	702
3.0	1.27	312
4.0	1.69	175
5.0	2.11	112



H(m)	D(m)	E(lx)
30°		
1.0	0.56	2289
2.0	1.11	572
3.0	1.67	254
4.0	2.23	143
5.0	2.78	91



H(m)	D(m)	E(lx)
45°		
1.0	0.82	1248
2.0	1.64	312
3.0	2.45	138
4.0	3.27	77
5.0	4.09	49



H(m)	D(m)	E(lx)
55°		
1.0	1.01	904
2.0	2.02	226
3.0	3.02	100
4.0	4.03	56
5.0	5.04	36

BRANKO-85 Round-Adjustable-Pinhole

BRANKO A-85P-RTA
BRANKO B-85P-RTA
BRANKO B-85P-RTLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.113-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.113-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.113-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



Trim-B								
	2318.115-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.115-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.115-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Trimless								
	2318.209F-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.209F-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.209F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver




S-007
Snoot



 Cut out : 75mm (Trim-A)



 Cut out : 80mm (Trim-B)





 Cut out : 80mm (Trimless)

IES



Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.43	2660
2.0	0.87	665
3.0	1.30	295
4.0	1.73	166
5.0	2.17	106



Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.56	2270
2.0	1.12	567
3.0	1.68	252
4.0	2.24	141
5.0	2.80	90



Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.82	1240
2.0	1.63	310
3.0	2.45	137
4.0	3.27	77
5.0	4.08	49



Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	1.01	897
2.0	2.03	224
3.0	3.04	99
4.0	4.05	56
5.0	5.07	35

BRANKO-85 Square-Fixed-Cone

BRANKO A-85C-STF
BRANKO B-85C-STF
BRANKO B-85C-STLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	2418.101-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.101-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.101-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



Trim-B	2418.109-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.109-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.109-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Trimless	2418.200A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.200A-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.200A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




ACHO-5
Honeycomb louver



 Cut out : 75x75mm (Trim-A)



 Cut out : 80x80mm (Trim-B)





 Cut out : 80x80mm (Trimless)

IES



Fixed UGR<2

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	2501
2.0	0.89	625
3.0	1.33	277
4.0	1.78	156
5.0	2.22	100



Fixed UGR<2

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	2176
2.0	1.13	543
3.0	1.70	241
4.0	2.27	136
5.0	2.83	87



Fixed UGR<9

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1214
2.0	1.62	303
3.0	2.43	143
4.0	3.24	75
5.0	4.05	48



Fixed UGR<15

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	882
2.0	1.99	220
3.0	2.98	98
4.0	3.98	55
5.0	4.97	35

BRANKO-85 Square-Adjustable-Cone

BRANKO A-85C-STA
BRANKO B-85C-STA
BRANKO B-85C-STLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2418.105-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.105-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.105-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+


*Also available in IP54 and IP65 for varied protection needs.



	2418.111-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.111-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.111-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




	2418.202A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.202A-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.202A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver


S-007
Shoot



 Cut out : 75x75mm (Trim-A)



 Cut out : 80x80mm (Trim-B)





 Cut out : 80x80mm (Trimless)

IES



Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	2476
2.0	0.89	619
3.0	1.33	275
4.0	1.77	154
5.0	2.21	99



Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	2189
2.0	1.14	547
3.0	1.71	243
4.0	2.29	136
5.0	2.86	89



Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1222
2.0	1.63	305
3.0	2.44	135
4.0	3.26	76
5.0	4.07	48



Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	892
2.0	1.98	223
3.0	2.97	99
4.0	3.96	55
5.0	4.95	35

BRANKO-85 Square-Fixed-Pinhole

BRANKO A-85P-STF
BRANKO B-85P-STF
BRANKO B-85P-STLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2418.102-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.102-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.102-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



Trim-B								
	2418.110-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.110-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.110-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Trimless								
	2418.201A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.201A-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.201A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




ACHO-5
Honeycomb louver



Cut out : 75x75mm (Trim-A)



Cut out : 80x80mm (Trim-B)





Cut out : 80x80mm (Trimless)

IES

25°

Fixed UGR<7

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	2445
2.0	0.88	611
3.0	1.32	271
4.0	1.76	152
5.0	2.21	97

30°

Fixed UGR<8

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	2153
2.0	1.14	538
3.0	1.71	239
4.0	2.28	134
5.0	2.85	86

45°

Fixed UGR<15

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1198
2.0	1.62	299
3.0	2.43	133
4.0	3.24	74
5.0	4.05	47

55°

Fixed UGR<19

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.98	872
2.0	1.96	218
3.0	2.94	96
4.0	3.93	54
5.0	4.91	34

BRANKO-85 Square-Adjustable-Pinhole

BRANKO A-85P-STA
BRANKO B-85P-STA
BRANKO B-85P-STLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2418.106-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.106-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.106-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+


*Also available in IP54 and IP65 for varied protection needs.



	2418.112-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.112-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.112-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+




	2418.203A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.203A-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.203A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver


S-007
Snoot



 Cut out : 75x75mm (Trim-A)



 Cut out : 80x80mm (Trim-B)





 Cut out : 80x80mm (Trimless)



25°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	2440
2.0	0.88	609
3.0	1.33	271
4.0	1.77	152
5.0	2.21	97



30°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	2132
2.0	1.14	533
3.0	1.71	236
4.0	2.27	133
5.0	2.84	85



45°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1192
2.0	1.62	298
3.0	2.43	132
4.0	3.24	74
5.0	4.05	47



55°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	875
2.0	1.98	218
3.0	2.97	97
4.0	3.97	54
5.0	4.96	35



BRANKO 110 ▶

Round / Square

Fixed

Adjustable

BRANKO-110 Round-Fixed-Cone

BRANKO A-110C-RTF
BRANKO B-110C-RTF
BRANKO B-110C-RTLF




Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.165-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.165-LEE-15	17W	500 mA	2004 lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.165-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.165-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.165-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.




Trim-B								
	2318.133-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.133-LEE-15	17W	500 mA	2004lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.133-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.133-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.133-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



Trimless								
	2318.214F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.214F-LEE-15	17W	500 mA	2004lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.214F-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.214F-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.214F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2318.165-LEE-15A
2318.165-LEE-15
2318.165-LEE-15-DW




 Cut out : 95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver
ACOT-109 Suction cup (for trimless)

2318.165-ACOT-72
2318.165-ACOT-72-WCW




 Cut out : 95mm (Trim-A)

2318.133-LEE-15A
2318.133-LEE-15
2318.133-LEE-15-DW




 Cut out : 100mm (Trim-B)

2318.133-ACOT-72
2318.133-ACOT-72-WCW




 Cut out : 100mm (Trim-B)

2318.214F-LEE-15A
2318.214F-LEE-15
2318.214F-LEE-15-DW



 Cut out : 100mm (Trimless)

2318.214F-ACOT-72
2318.214F-ACOT-72-WCW





 Cut out : 100mm (Trimless)

IES



Fixed UGR<3

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.37	6328
2.0	0.74	1582
3.0	1.11	703
4.0	1.48	395
5.0	1.85	253



Fixed UGR<2

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.58	3634
2.0	1.15	908
3.0	1.73	403
4.0	2.31	227
5.0	2.88	145



Fixed UGR<8

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
45°		
1.0	0.79	2220
2.0	1.59	555
3.0	2.38	246
4.0	3.18	138
5.0	3.97	88



Fixed UGR<14

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
55°		
1.0	0.99	1428
2.0	1.98	357
3.0	2.96	158
4.0	3.95	89
5.0	4.94	57



Fixed UGR<8

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.52	4002
2.0	1.04	1000
3.0	1.57	444
4.0	2.09	250
5.0	2.61	160



Fixed UGR<7

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.71	3162
2.0	1.42	790
3.0	2.14	351
4.0	2.85	197
5.0	3.57	126



Fixed UGR<12

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
50°		
1.0	0.89	2243
2.0	1.77	560
3.0	2.66	249
4.0	3.55	140
5.0	4.43	89



Fixed UGR<18

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72



H(m)	D(m)	E(lx)
60°		
1.0	1.09	1538
2.0	2.17	384
3.0	3.26	170
4.0	4.35	96
5.0	5.44	61

BRANKO-110 Round-Adjustable-Cone

BRANKO A-110C-RTA
BRANKO B-110C-RTA
BRANKO B-110C-RTLA



Colours

Bezel : Black ☒ White ☐



Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
------	----------------	-----------------	---------	-----------	-----------------	------------	-----	-----

Trim-A

	2318.167-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.167-LEE-15	17W	500 mA	2004 lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.167-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.167-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.167-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



Trim-B

	2318.137-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.137-LEE-15	17W	500 mA	2004lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.137-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.137-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.137-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless

	2318.216F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.216F-LEE-15	17W	500 mA	2004lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.216F-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.216F-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/57° (Lens)	3000K	90+
	2318.216F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




2318.167-LEE-15A
2318.167-LEE-15
2318.167-LEE-15-DW



Dimmable




Optional Accessory



H7-1
Honeycomb louver


ACSN-17-BK
Snoot

2318.167-ACOT-72
2318.167-ACOT-72-WCW




ⓐ Cut out : 95mm (Trim-A)

2318.137-LEE-15A
2318.137-LEE-15
2318.137-LEE-15-DW




ⓐ Cut out : 100mm (Trim-B)

2318.137-ACOT-72
2318.137-ACOT-72-WCW




ⓐ Cut out : 100mm (Trim-B)

2318.216F-LEE-15A
2318.216F-LEE-15
2318.216F-LEE-15-DW



ⓐ Cut out : 100mm (Trimless)

2318.216F-ACOT-72
2318.216F-ACOT-72-WCW





ⓐ Cut out : 100mm (Trimless)

IES



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.37	6047
2.0	0.74	1512
3.0	1.11	671
4.0	1.48	377
5.0	1.85	241



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.57	3594
2.0	1.15	898
3.0	1.72	399
4.0	2.30	224
5.0	2.87	143



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
45°		
1.0	0.78	2198
2.0	1.56	549
3.0	2.33	244
4.0	3.11	137
5.0	3.89	87



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
55°		
1.0	0.98	1400
2.0	1.95	350
3.0	2.93	155
4.0	3.91	87
5.0	4.88	56



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.53	4070
2.0	1.07	1017
3.0	1.60	452
4.0	2.14	254
5.0	2.67	162



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.71	3174
2.0	1.43	793
3.0	2.14	352
4.0	2.86	198
5.0	3.57	127



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
50°		
1.0	0.89	2239
2.0	1.77	559
3.0	2.66	248
4.0	3.55	139
5.0	4.43	89



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72



H(m)	D(m)	E(lx)
57°		
1.0	1.08	1537
2.0	2.16	384
3.0	3.24	170
4.0	4.32	96
5.0	5.40	61


BRANKO-110 Round-Fixed-Pinhole

BRANKO A-110P-RTF
BRANKO B-110P-RTF
BRANKO B-110P-RTLF



Colours
Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.132-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.132-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.132-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2318.132-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.132-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
*Also available in IP54 and IP65 for varied protection needs.				↓ IP20 ↑ IP54 ↓ IP20 ↑ IP65		 39° Cut-off IP44  DIM TO WARM  TUNABLE WHITE		
Trim-B								
	2318.134-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.134-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.134-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2318.134-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.134-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
						 39° Cut-off IP44  DIM TO WARM  TUNABLE WHITE		
Trimless								
	2318.215F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.215F-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.215F-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2318.215F-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.215F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
						 39° Cut-off IP44  DIM TO WARM  TUNABLE WHITE		




Dimmable

TRIAC 1-10V

Optional Accessory


H7-1
Honeycomb louver

2318.132-ACOT-72
2318.132-ACOT-72-WCW




 Cut out : 95mm (Trim-A)

2318.134-LEE-15A
2318.134-LEE-15
2318.134-LEE-15-DW




 Cut out : 100mm (Trim-B)

2318.134-ACOT-72
2318.134-ACOT-72-WCW




 Cut out : 100mm (Trim-B)

2318.215F-LEE-15A
2318.215F-LEE-15
2318.215F-LEE-15-DW



 Cut out : 100mm (Trimless)

2318.215F-ACOT-72
2318.215F-ACOT-72-WCW





 Cut out : 100mm (Trimless)

IES



Fixed UGR<7

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.49	3850
2.0	0.98	962
3.0	1.47	427
4.0	1.96	240
5.0	2.44	154



Fixed UGR<9

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.67	3122
2.0	1.34	780
3.0	2.02	346
4.0	2.69	195
5.0	3.37	124



Fixed UGR<14

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	2196
2.0	1.69	549
3.0	2.53	244
4.0	3.39	137
5.0	4.23	87



Fixed UGR<20

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	1555
2.0	2.03	388
3.0	3.04	172
4.0	4.06	97
5.0	5.07	62

BRANKO-110 Round-Adjustable-Pinhole

BRANKO A-110P-RTA
BRANKO B-110P-RTA
BRANKO B-110P-RTLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	 2318.168-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.168-LEE-15	17W	500 mA	2004 lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.168-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	 2318.168-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.168-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



*Also available in IP54 and IP65 for varied protection needs.



Trim-B	 2318.138-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.138-LEE-15	17W	500 mA	2004lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.138-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	 2318.138-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.138-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



Trimless	 2318.217F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.217F-LEE-15	17W	500 mA	2004lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.217F-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	 2318.217F-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.217F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory






Cut out : 95mm (Trim-A)

2318.138-LEE-15A
2318.138-LEE-15
2318.138-LEE-15-DW




Cut out : 100mm (Trim-B)

2318.138-ACOT-72
2318.138-ACOT-72-WCW




Cut out : 100mm (Trim-B)

2318.217F-LEE-15A
2318.217F-LEE-15
2318.217F-LEE-15-DW



Cut out : 100mm (Trimless)

2318.217F-ACOT-72
2318.217F-ACOT-72-WCW





Cut out : 100mm (Trimless)

IES



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.36	6068
2.0	0.72	1517
3.0	1.07	674
4.0	1.43	379
5.0	1.79	242



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.56	3779
2.0	1.12	944
3.0	1.68	419
4.0	2.24	236
5.0	2.80	151



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
40°		
1.0	0.76	2290
2.0	1.52	572
3.0	2.29	254
4.0	3.05	143
5.0	3.81	91



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
50°		
1.0	0.95	1458
2.0	1.90	364
3.0	2.85	162
4.0	3.80	91
5.0	4.75	58



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.49	4023
2.0	0.99	1006
3.0	1.48	447
4.0	1.98	251
5.0	2.47	160



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.68	3199
2.0	1.37	799
3.0	2.05	355
4.0	2.73	199
5.0	3.42	128



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	2232
2.0	1.70	557
3.0	2.54	247
4.0	3.39	139
5.0	4.24	89



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	1567
2.0	2.02	391
3.0	3.03	174
4.0	4.04	97
5.0	5.05	62

BRANKO-110 Square-Fixed-Cone

BRANKO A-110C-STF
BRANKO B-110C-STF
BRANKO B-110C-STLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2418.116-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.116-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.116-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.116-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.116-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 and IP65 for varied protection needs.



Trim-B

	2418.113-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.113-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.113-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.113-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.113-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



Trimless

	2418.204A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.204A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.204A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.204A-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.204A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2418.116-LEE-15A
2418.116-LEE-15
2418.116-LEE-15-DW

114mm

102mm

95mm

95mm

Cut out : 95X95mm (Trim-A)


Dimmable



Optional Accessory


H7-1
Honeycomb louver

2418.116-ACOT-72
2418.116-ACOT-72-WCW




 Cut out : 95X95mm (Trim-A)

2418.113-LEE-15A
2418.113-LEE-15
2418.113-LEE-15-DW




 Cut out : 100X100mm (Trim-B)

2418.113-ACOT-72
2418.113-ACOT-72-WCW




 Cut out : 100X100mm (Trim-B)

2418.204A-LEE-15A
2418.204A-LEE-15
2418.204A-LEE-15-DW



 Cut out : 100X100mm (Trimless)

2418.204A-ACOT-72
2418.204A-ACOT-72-WCW





 Cut out : 100X100mm (Trimless)

IES



Fixed UGR<1

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.51	3672
2.0	1.02	918
3.0	1.53	408
4.0	2.04	229
5.0	2.54	146



Fixed UGR<4

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	2957
2.0	1.38	739
3.0	2.07	328
4.0	2.77	184
5.0	3.46	118



Fixed UGR<10

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	2178
2.0	1.70	544
3.0	2.55	242
4.0	3.40	136
5.0	4.24	87



Fixed UGR<15

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.02	1496
2.0	2.04	374
3.0	3.06	166
4.0	4.09	93
5.0	5.11	59




Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2418.118-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.118-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.118-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.118-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.118-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
*Also available in IP54 and IP65 for varied protection needs.				↓ IP20 ↑ IP54 ↓ IP20 ↑ IP65				
Trim-B								
	2418.115-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.115-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.115-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.115-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.115-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
								
Trimless								
	2418.206A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.206A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.206A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.206A-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.206A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
								

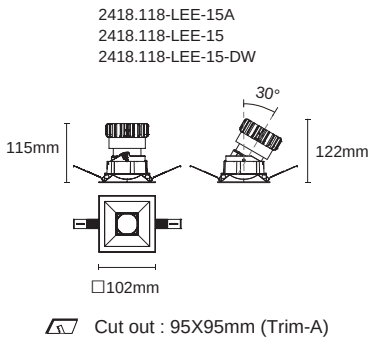


Dimmable



TRIAC

1-10V

Optional Accessory




H7-1
Honeycomb louver




ACSN-17-BK
Snoot

2418.118-ACOT-72
2418.118-ACOT-72-WCW

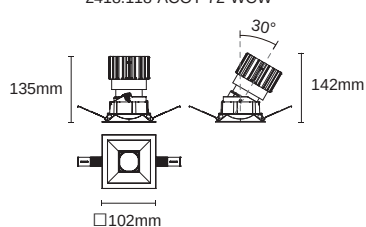


Cut out : 95X95mm (Trim-A)

2418.115-LEE-15A
2418.115-LEE-15
2418.115-LEE-15-DW




Cut out : 100X100mm (Trim-B)

2418.115-ACOT-72
2418.115-ACOT-72-WCW




Cut out : 100X100mm (Trim-B)

2418.206A-LEE-15A
2418.206A-LEE-15
2418.206A-LEE-15-DW



Cut out : 100X100mm (Trimless)

2418.206A-ACOT-72
2418.206A-ACOT-72-WCW





Cut out : 100X100mm (Trimless)



30°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.50	3592
2.0	1.00	898
3.0	1.51	399
4.0	2.01	224
5.0	2.51	143



40°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	3063
2.0	1.38	765
3.0	2.07	340
4.0	2.75	191
5.0	3.44	122



46°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.85	2172
2.0	1.69	543
3.0	2.54	241
4.0	3.38	135
5.0	4.23	86



55°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	1546
2.0	2.02	386
3.0	3.03	171
4.0	4.04	96
5.0	5.05	61

BRANKO-110 Square-Fixed-Pinhole

BRANKO A-110P-STF
BRANKO B-110P-STF
BRANKO B-110P-STLF




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2418.117-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.117-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.117-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.117-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.117-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
*Also available in IP54 and IP65 for varied protection needs.				↓ IP20 ↑ IP54 ↓ IP20 ↑ IP65		 39° Cut-off IP44  		
Trim-B								
	2418.114-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.114-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.114-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.114-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.114-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
				 39° Cut-off IP44  				
Trimless								
	2418.205A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.205A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.205A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.205A-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.205A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
				 39° Cut-off IP44  				

2418.117-LEE-15A
2418.117-LEE-15
2418.117-LEE-15-DW




Cut out : 95X95mm (Trim-A)

Dimmable




TRIAC1-10V

Optional Accessory




H7-1
Honeycomb louver

2418.117-ACOT-72
2418.117-ACOT-72-WCW




Cut out : 95X95mm (Trim-A)

2418.114-LEE-15A
2418.114-LEE-15
2418.114-LEE-15-DW




Cut out : 100X100mm (Trim-B)

2418.114-ACOT-72
2418.114-ACOT-72-WCW




Cut out : 100X100mm (Trim-B)

2418.205A-LEE-15A
2418.205A-LEE-15
2418.205A-LEE-15-DW



Cut out : 100X100mm (Trimless)

2418.205A-ACOT-72
2418.205A-ACOT-72-WCW





Cut out : 100X100mm (Trimless)

IES



Fixed UGR<6

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.51	3678
2.0	1.01	919
3.0	1.52	408
4.0	2.02	229
5.0	2.53	147



Fixed UGR<7

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	3177
2.0	1.37	794
3.0	2.06	353
4.0	2.74	198
5.0	3.43	127



Fixed UGR<13

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	2232
2.0	1.69	558
3.0	2.53	248
4.0	3.38	139
5.0	4.22	89



Fixed UGR<19

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.00	1581
2.0	2.01	395
3.0	3.01	175
4.0	4.02	98
5.0	5.02	63



BRANKO-110 Square-Adjustable-Pinhole


BRANKO A-110P-STA
BRANKO B-110P-STA
BRANKO B-110P-STLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.169-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.169-LEE-15	17W	500 mA	2004 lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.169-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.169-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.169-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
*Also available in IP54 and IP65 for varied protection needs.								
Trim-B								
	2318.154-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.154-LEE-15	17W	500 mA	2004lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.154-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.154-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.154-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
								
Trimless								
	2318.218A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.218A-LEE-15	17W	500 mA	2004lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.218A-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.218A-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.218A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
								

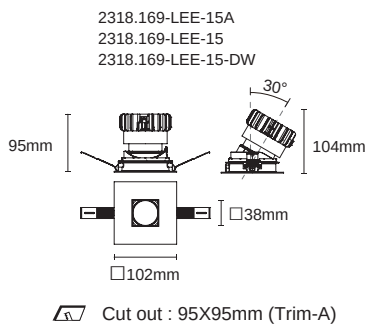


Dimmable




Optional Accessory







Cut out : 95X95mm (Trim-A)




Cut out : 100X100mm (Trim-B)



Cut out : 100X100mm (Trim-B)



Cut out : 100X100mm (Trimless)





Cut out : 100X100mm (Trimless)

IES



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.35	6197
2.0	0.70	1549
3.0	1.05	688
4.0	1.40	387
5.0	1.75	247



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.56	3691
2.0	1.11	922
3.0	1.67	410
4.0	2.22	230
5.0	2.79	147



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
40°		
1.0	0.77	2269
2.0	1.53	567
3.0	2.30	252
4.0	3.06	141
5.0	3.83	90



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
50°		
1.0	0.95	1444
2.0	1.91	360
3.0	2.86	160
4.0	3.81	90
5.0	4.76	57



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.50	3551
2.0	1.00	887
3.0	1.50	394
4.0	2.00	221
5.0	2.50	142



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.68	3120
2.0	1.36	780
3.0	2.04	346
4.0	2.72	195
5.0	3.40	124



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	2197
2.0	1.68	549
3.0	2.53	244
4.0	3.37	137
5.0	4.21	87



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	0.99	1554
2.0	1.97	388
3.0	2.96	172
4.0	3.95	97
5.0	4.93	62