


BRANKO SERIES (EU)

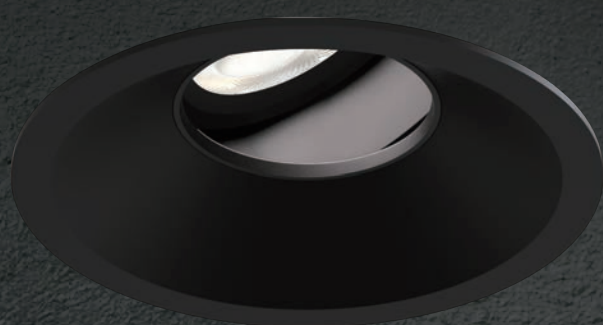

BRANKO (EU)

Invisibility : This lighting fixture boasts a unique design that seamlessly integrates with the ceiling, remaining virtually invisible. It creates an understated lighting effect without drawing attention to itself.

Low UGR : $UGR < 10$, providing a soft and even illumination for a comfortable lighting environment, and minimizing discomfort and fatigue to eyes

Versatile Application : The fixture's discreet and gentle lighting makes it well-suited for various settings, including residential spaces and hospitality environments. It complements these spaces by offering unobtrusive yet effective lighting.



In summary, this invisible lighting fixture combines subtlety with functionality, offering a comfortable and inconspicuous lighting solution suitable for diverse environments.



Cone

It is a multifunctional accent light that can highlight a single object or architectural element.



Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

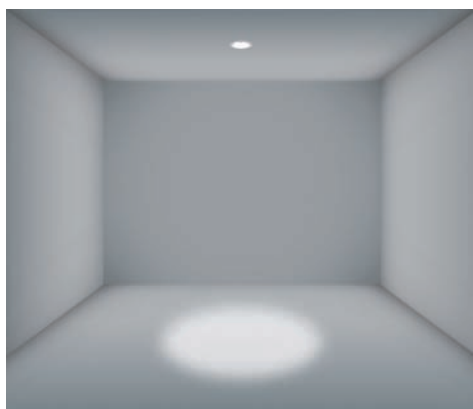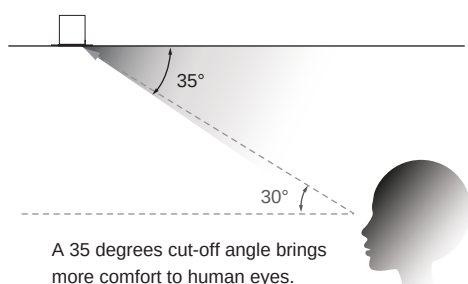

Pinhole

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

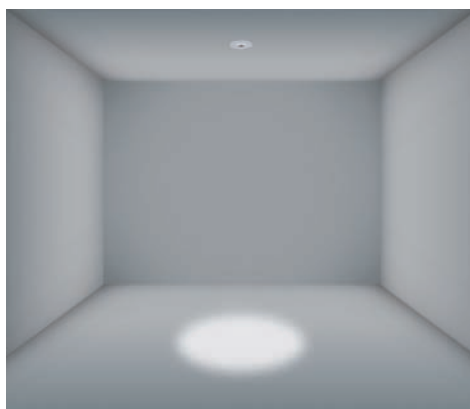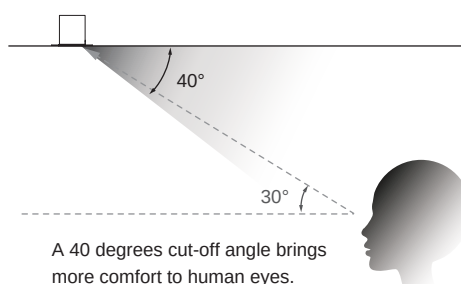

BRANKO

Recessed downlights



Round

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable
Cone				
Trim-A				
Trim-B				
Trimless				
Pinhole				
Trim-A				
Trim-B				
Trimless				

Square

Cone				
Trim-A				
Trim-B				
Trimless				
Pinhole				
Trim-A				
Trim-B				
Trimless				



LEE-15
LEE-15A Narrow beam
LEE-15-DW Dim to warm



ACOT-72
ACOT-72-WCW Tunable white

110
Fixed

110
Adjustable

Cone

Trim-A



Trim-B



Trimless



Pinhole

Trim-A



Trim-B



Trimless



Cone

Trim-A



Trim-B



Trimless



Pinhole

Trim-A



Trim-B



Trimless









BRANKO 65



Round

Fixed

Adjustable

BRANKO-65 Round-Fixed-Cone



BRANKO A-65C-RTF
BRANKO B-65C-RTF
BRANKO B-65C-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.125-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.125-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.116-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.116-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.210F-ACOT-68	10W	250 mA	913 lm	544 lm	15°/20°/35°/40° (Lens)	3000K	90+
	2318.210F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable



Optional Accessory




2318.116-ACOT-68




Cut out : 60mm (Trim-B)

2318.116-ACOT-69-WCW




Cut out : 60mm (Trim-B)

2318.210F-ACOT-68



Cut out : 60mm (Trimless)

2318.210F-ACOT-69-WCW





Cut out : 60mm (Trimless)

IES



Fixed UGR<10

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.29	2982
2.0	0.58	745
3.0	0.87	331
4.0	1.16	186
5.0	1.46	119



Fixed UGR<10

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.39	2323
2.0	0.77	580
3.0	1.16	258
4.0	1.54	145
5.0	1.93	92



Fixed UGR<13

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.62	1389
2.0	1.24	347
3.0	1.86	154
4.0	2.47	86
5.0	3.09	55



Fixed UGR<19

2318.125-ACOT-68
2318.116-ACOT-68
2318.210F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.72	1129
2.0	1.44	282
3.0	2.16	125
4.0	2.87	70
5.0	3.59	45

BRANKO-65 Round-Adjustable-Cone



BRANKO A-65C-RTA
BRANKO B-65C-RTA
BRANKO B-65C-RTLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.126-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.126-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.117-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.117-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.211F-ACOT-68	10W	250 mA	913 lm	556 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.211F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable



Optional Accessory




2318.117-ACOT-68




Ⓢ Cut out : 60mm (Trim-B)

2318.117-ACOT-69-WCW




Ⓢ Cut out : 60mm (Trim-B)

2318.211F-ACOT-68



Ⓢ Cut out : 60mm (Trimless)

2318.211F-ACOT-69-WCW





Ⓢ Cut out : 60mm (Trimless)

IES



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.30	2982
2.0	0.60	745
3.0	0.90	331
4.0	1.20	186
5.0	1.50	119



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.41	2551
2.0	0.83	637
3.0	1.24	283
4.0	1.66	159
5.0	2.07	102



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.62	1373
2.0	1.24	343
3.0	1.86	152
4.0	2.48	85
5.0	3.11	54



Adjustable

2318.126-ACOT-68
2318.117-ACOT-68
2318.211F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.75	1078
2.0	1.50	269
3.0	2.25	119
4.0	3.00	67
5.0	3.75	43

BRANKO-65 Round-Fixed-Pinhole



BRANKO A-65P-RTF
BRANKO B-65P-RTF
BRANKO B-65P-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.118-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.118-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.120-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.120-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.212F-ACOT-68	10W	250 mA	913 lm	489 lm	15°/24°/30°/35° (Lens)	3000K	90+
	2318.212F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




2318.120-ACOT-68




2318.120-ACOT-69-WCW



2318.212F-ACOT-68



2318.212F-ACOT-69-WCW





IES



Fixed UGR<10

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.27	3129
2.0	0.53	782
3.0	0.80	347
4.0	1.06	195
5.0	1.33	125



Fixed UGR<10

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
24°		
1.0	0.39	2504
2.0	0.78	625
3.0	1.16	278
4.0	1.55	156
5.0	1.94	100



Fixed UGR<16

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68





H(m)	D(m)	E(lx)
30°		
1.0	0.56	1441
2.0	1.12	360
3.0	1.68	160
4.0	2.24	90
5.0	2.80	57



Fixed UGR<22

2318.118-ACOT-68
2318.120-ACOT-68
2318.212F-ACOT-68



H(m)	D(m)	E(lx)
35°		
1.0	0.66	1118
2.0	1.31	279
3.0	1.96	124
4.0	2.62	69
5.0	3.37	44

BRANKO-65 Round-Adjustable-Pinhole


BRANKO A-65P-RTA
BRANKO B-65P-RTA
BRANKO B-65P-RTLA




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.119-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.119-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trim-B								
	2318.121-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.121-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless								
	2318.213F-ACOT-68	10W	250 mA	913 lm	508 lm	15°/25°/35°/40° (Lens)	3000K	90+
	2318.213F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	15°/24°/36°/50° (Lens)	2700-6500K	90+



⌀ Cut out : 55mm (Trim-A)




⌀ Cut out : 55mm (Trim-A)

Dimmable



Optional Accessory




ACHO-6
Honeycomb louver




ACOT-107
Suction cup

2318.121-ACOT-68




 Cut out : 60mm (Trim-B)

2318.121-ACOT-69-WCW




 Cut out : 60mm (Trim-B)

2318.213F-ACOT-68



 Cut out : 60mm (Trimless)

2318.213F-ACOT-69-WCW





 Cut out : 60mm (Trimless)

IES



Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
15°		
1.0	0.28	2995
2.0	0.56	748
3.0	0.83	332
4.0	1.11	187
5.0	1.39	119



Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
25°		
1.0	0.39	2367
2.0	0.77	591
3.0	1.16	263
4.0	1.54	147
5.0	1.93	94



Adjustable

2318.119-ACOT-68
2318.121-ACOT-68
2318.213F-ACOT-68





H(m)	D(m)	E(lx)
35°		
1.0	0.58	1348
2.0	1.17	337
3.0	1.75	149
4.0	2.34	84
5.0	2.92	53



Adjustable

2118.174-ACOT-68
2118.267F-ACOT-68



H(m)	D(m)	E(lx)
40°		
1.0	0.69	1123
2.0	1.38	280
3.0	2.07	124
4.0	2.76	70
5.0	3.46	44



BRANKO 85

Round / Square

Fixed
Adjustable

BRANKO-85 Round-Fixed-Cone

BRANKO A-85C-RTF
BRANKO B-85C-RTF
BRANKO B-85C-RTLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	 2318.127-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.127-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.127-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B	 2318.110-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.110-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.110-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Trimless	 2318.206F-ACOT-70A	10W	800 mA	774 lm	401 lm	10° (Lens)	3000K	90+
	2318.206F-ACOT-70	12W	350 mA	1454 lm	1005 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.206F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable






Optional Accessory



ACHO-5
Honeycomb louver



ACOT-108
Suction cup (for trimless)





IES



Fixed UGR<10

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.47	3758
2.0	0.94	939
3.0	1.41	417
4.0	1.88	234
5.0	2.35	150



Fixed UGR<10

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
35°		
1.0	0.60	3180
2.0	1.19	794
3.0	1.79	353
4.0	2.38	198
5.0	2.98	127



Fixed UGR<16

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.83	1864
2.0	1.67	466
3.0	2.50	207
4.0	3.34	116
5.0	4.17	74



Fixed UGR<22

2318.127-ACOT-70
2318.110-ACOT-70
2318.206F-ACOT-70





H(m)	D(m)	E(lx)
55°		
1.0	1.04	1276
2.0	2.09	319
3.0	3.13	141
4.0	4.18	79
5.0	5.22	51



Fixed UGR<10

2318.127-ACOT-70A
2318.110-ACOT-70A
2318.206F-ACOT-70A



H(m)	D(m)	E(lx)
10°		
1.0	0.18	6492
2.0	0.36	1623
3.0	0.55	721
4.0	0.73	405
5.0	0.91	259

BRANKO-85 Round-Adjustable-Cone

BRANKO A-85C-RTA
BRANKO B-85C-RTA
BRANKO B-85C-RTLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.128-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.128-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.128-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.

↓ IP20

↑ IP54



IP44

TUNABLE WHITE

	2318.111-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.111-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.111-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

	2318.207F-ACOT-70A	10W	800 mA	774 lm	407 lm	10° (Lens)	3000K	90+
	2318.207F-ACOT-70	12W	350 mA	1454 lm	992 lm	25°/35°/45°/55° (Lens)	3000K	90+
	2318.207F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

Dimmable

Optional Accessory




ACHO-5
Honeycomb louver




S-007
Snoot


266



⊖ Cut out : 75mm (Trim-A)



⊖ Cut out : 80mm (Trim-B)





⊖ Cut out : 80mm (Trimless)

IES



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.47	3785
2.0	0.94	946
3.0	1.41	420
4.0	1.88	236
5.0	2.35	151



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
35°		
1.0	0.59	3150
2.0	1.18	787
3.0	1.76	350
4.0	2.35	196
5.0	2.94	126



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.83	1865
2.0	1.66	466
3.0	2.49	207
4.0	3.32	116
5.0	4.15	74



Adjustable

2318.128-ACOT-70
2318.111-ACOT-70
2318.207F-ACOT-70





H(m)	D(m)	E(lx)
55°		
1.0	1.04	1270
2.0	2.08	317
3.0	3.13	141
4.0	4.17	79
5.0	5.21	50



Adjustable

2318.128-ACOT-70A
2318.111-ACOT-70A
2318.207F-ACOT-70A



H(m)	D(m)	E(lx)
10°		
1.0	0.18	6498
2.0	0.37	1625
3.0	0.55	722
4.0	0.74	406
5.0	0.92	259

BRANKO-85 Round-Fixed-Pinhole

BRANKO A-85P-RTF
BRANKO B-85P-RTF
BRANKO B-85P-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.112-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.112-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.112-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



	2318.114-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.114-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.114-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



	2318.208F-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.208F-ACOT-70	12W	350 mA	1454 lm	957 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.208F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+






Dimmable





Optional Accessory






ACHO-5
Honeycomb louver






IES






H(m)	D(m)	E(lx)
25°		
1.0	0.42	3865
2.0	0.85	966
3.0	1.27	429
4.0	1.69	241
5.0	2.11	154



H(m)	D(m)	E(lx)
30°		
1.0	0.56	3300
2.0	1.11	825
3.0	1.67	366
4.0	2.23	206
5.0	2.78	132



H(m)	D(m)	E(lx)
45°		
1.0	0.82	1876
2.0	1.64	469
3.0	2.45	208
4.0	3.27	117
5.0	4.09	75



H(m)	D(m)	E(lx)
55°		
1.0	1.01	1354
2.0	2.02	338
3.0	3.02	150
4.0	4.03	84
5.0	5.04	54

BRANKO-85 Round-Adjustable-Pinhole

BRANKO A-85P-RTA
BRANKO B-85P-RTA
BRANKO B-85P-RTLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2318.113-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.113-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.113-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



	2318.115-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.115-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.115-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



	2318.209F-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2318.209F-ACOT-70	12W	350 mA	1454 lm	959 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2318.209F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver




S-007
Snoot



Ⓢ Cut out : 75mm (Trim-A)



Ⓢ Cut out : 80mm (Trim-B)





Ⓢ Cut out : 80mm (Trimless)



25°

Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.43	3813
2.0	0.87	953
3.0	1.30	423
4.0	1.73	238
5.0	2.17	152



30°

Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.56	3250
2.0	1.12	812
3.0	1.68	361
4.0	2.24	203
5.0	2.80	130



45°

Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.82	1857
2.0	1.63	464
3.0	2.45	206
4.0	3.27	116
5.0	4.08	74



55°

Adjustable

2318.113-ACOT-70
2318.115-ACOT-70
2318.209F-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	1.01	1334
2.0	2.03	333
3.0	3.04	148
4.0	4.05	83
5.0	5.07	53

BRANKO-85 Square-Fixed-Cone

BRANKO A-85C-STF
BRANKO B-85C-STF
BRANKO B-85C-STLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	2418.101-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.101-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.101-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B	2418.109-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.109-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.109-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Trimless	2418.200A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.200A-ACOT-70	12W	350 mA	1454 lm	939 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.200A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




ACHO-5
Honeycomb louver



 Cut out : 75x75mm (Trim-A)



 Cut out : 80x80mm (Trim-B)





 Cut out : 80x80mm (Trimless)



25°

Fixed UGR<10

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	3568
2.0	0.89	892
3.0	1.33	396
4.0	1.78	223
5.0	2.22	142



30°

Fixed UGR<10

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	3153
2.0	1.13	788
3.0	1.70	350
4.0	2.27	197
5.0	2.83	126



45°

Fixed UGR<10

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1853
2.0	1.62	463
3.0	2.43	205
4.0	3.24	115
5.0	4.05	74



55°

Fixed UGR<16

2418.101-ACOT-70
2418.109-ACOT-70
2418.200A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	1335
2.0	1.99	333
3.0	2.98	148
4.0	3.98	83
5.0	4.97	53

BRANKO-85 Square-Adjustable-Cone

BRANKO A-85C-STA
BRANKO B-85C-STA
BRANKO B-85C-STLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐


Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2418.105-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.105-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.105-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.






Trim-B								
	2418.111-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.111-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.111-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




Trimless								
	2418.202A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.202A-ACOT-70	12W	350 mA	1454 lm	950 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.202A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver


S-007
Shoot



Cut out : 75x75mm (Trim-A)



Cut out : 80x80mm (Trim-B)



Cut out : 80x80mm (Trimless)



IES



25°

Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	3550
2.0	0.89	887
3.0	1.33	394
4.0	1.77	221
5.0	2.21	142



30°

Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	3173
2.0	1.14	793
3.0	1.71	352
4.0	2.29	198
5.0	2.86	126



45°

Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1861
2.0	1.63	465
3.0	2.44	206
4.0	3.26	116
5.0	4.07	74



55°

Adjustable

2418.105-ACOT-70
2418.111-ACOT-70
2418.202A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	1352
2.0	1.98	338
3.0	2.97	150
4.0	3.96	84
5.0	4.95	54

BRANKO-85 Square-Fixed-Pinhole

BRANKO A-85P-STF
BRANKO B-85P-STF
BRANKO B-85P-STLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2418.102-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.102-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.102-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B

	2418.110-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.110-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.110-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+



Trimless

	2418.201A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.201A-ACOT-70	12W	350 mA	1454 lm	918 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.201A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/30°/45°/55° (Lens)	2700-6500K	90+




Dimmable




Optional Accessory




ACHO-5
Honeycomb louver



△ Cut out : 75x75mm (Trim-A)



△ Cut out : 80x80mm (Trim-B)





△ Cut out : 80x80mm (Trimless)



Fixed UGR<10

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	3513
2.0	0.88	878
3.0	1.32	390
4.0	1.76	219
5.0	2.21	140



Fixed UGR<10

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	3127
2.0	1.14	781
3.0	1.71	347
4.0	2.28	195
5.0	2.85	125



Fixed UGR<16

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1836
2.0	1.62	459
3.0	2.43	204
4.0	3.24	114
5.0	4.05	73



Fixed UGR<19

2418.102-ACOT-70
2418.110-ACOT-70
2418.201A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.98	1333
2.0	1.96	333
3.0	2.94	148
4.0	3.93	83
5.0	4.91	53

BRANKO-85 Square-Adjustable-Pinhole

BRANKO A-85P-STA
BRANKO B-85P-STA
BRANKO B-85P-STLA



Colours

Bezel : Black ☒ White ☐


Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	 2418.106-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.106-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.106-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B	 2418.112-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.112-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.112-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+




Trimless	 2418.203A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2418.203A-ACOT-70	12W	350 mA	1454 lm	930 lm	25°/30°/45°/55° (Lens)	3000K	90+
	2418.203A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable




Optional Accessory




ACHO-5
Honeycomb louver


S-007
Snoot



 Cut out : 75x75mm (Trim-A)



 Cut out : 80x80mm (Trim-B)





 Cut out : 80x80mm (Trimless)



25°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
25°		
1.0	0.44	3483
2.0	0.88	870
3.0	1.33	387
4.0	1.77	217
5.0	2.21	139



30°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
30°		
1.0	0.57	3098
2.0	1.14	774
3.0	1.71	344
4.0	2.27	193
5.0	2.84	123



45°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70





H(m)	D(m)	E(lx)
45°		
1.0	0.81	1829
2.0	1.62	457
3.0	2.43	203
4.0	3.24	114
5.0	4.05	73



55°

Adjustable

2418.106-ACOT-70
2418.112-ACOT-70
2418.203A-ACOT-70



H(m)	D(m)	E(lx)
55°		
1.0	0.99	1329
2.0	1.98	332
3.0	2.97	147
4.0	3.97	83
5.0	4.96	53



BRANKO 110 ▶

Round / Square

Fixed

Adjustable

BRANKO-110 Round-Fixed-Cone

BRANKO A-110C-RTF
BRANKO B-110C-RTF
BRANKO B-110C-RTLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.165-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.165-LEE-15	17W	500 mA	2004 lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.165-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.165-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.165-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.




Trim-B								
	2318.133-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.133-LEE-15	17W	500 mA	2004lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.133-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.133-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.133-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



Trimless								
	2318.214F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.214F-LEE-15	17W	500 mA	2004lm	1559 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.214F-LEE-15-DW	16W	450 mA	34-1507 lm	1003 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.214F-ACOT-72	25W	700 mA	2873 lm	1937 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.214F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2318.165-LEE-15A
2318.165-LEE-15
2318.165-LEE-15-DW



Cut out : 95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver ACOT-109 Suction cup (for trimless) ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2318.165-ACOT-72
2318.165-ACOT-72-WCW




 Cut out : 95mm (Trim-A)

2318.133-LEE-15A
2318.133-LEE-15
2318.133-LEE-15-DW




 Cut out : 100mm (Trim-B)

2318.133-ACOT-72
2318.133-ACOT-72-WCW




 Cut out : 100mm (Trim-B)

2318.214F-LEE-15A
2318.214F-LEE-15
2318.214F-LEE-15-DW



 Cut out : 100mm (Trimless)

2318.214F-ACOT-72
2318.214F-ACOT-72-WCW





 Cut out : 100mm (Trimless)

IES



Fixed UGR<10

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.37	8627
2.0	0.74	2157
3.0	1.11	958
4.0	1.48	539
5.0	1.85	345



Fixed UGR<10

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.58	5279
2.0	1.15	1320
3.0	1.73	586
4.0	2.31	330
5.0	2.88	211



Fixed UGR<10

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
45°		
1.0	0.79	3059
2.0	1.59	764
3.0	2.38	339
4.0	3.18	191
5.0	3.97	122



Fixed UGR<16

2318.165-LEE-15
2318.133-LEE-15
2318.214F-LEE-15





H(m)	D(m)	E(lx)
55°		
1.0	0.99	2056
2.0	1.98	514
3.0	2.96	228
4.0	3.95	128
5.0	4.94	82



Fixed UGR<10

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.52	5335
2.0	1.04	1334
3.0	1.57	592
4.0	2.09	333
5.0	2.61	213



Fixed UGR<10

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.71	4614
2.0	1.42	1154
3.0	2.14	512
4.0	2.85	288
5.0	3.57	184



Fixed UGR<13

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72





H(m)	D(m)	E(lx)
50°		
1.0	0.89	3288
2.0	1.77	822
3.0	2.66	365
4.0	3.55	205
5.0	4.43	131



Fixed UGR<19

2318.165-ACOT-72
2318.133-ACOT-72
2318.214F-ACOT-72



H(m)	D(m)	E(lx)
60°		
1.0	1.09	2386
2.0	2.17	596
3.0	3.26	265
4.0	4.35	149
5.0	5.44	95

BRANKO-110 Round-Adjustable-Cone

BRANKO A-110C-RTA
BRANKO B-110C-RTA
BRANKO B-110C-RTLA



Colours

Bezel : Black ☒ White ☐


Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
------	----------------	-----------------	---------	-----------	-----------------	------------	-----	-----

Trim-A

	2318.167-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.167-LEE-15	17W	500 mA	2004 lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.167-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.167-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.167-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B

	2318.137-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.137-LEE-15	17W	500 mA	2004lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.137-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.137-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2318.137-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless

	2318.216F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.216F-LEE-15	17W	500 mA	2004lm	1528 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2318.216F-LEE-15-DW	16W	450 mA	34-1507 lm	977 lm	20°/25°/40°/45° (Lens)	1800-3000K	90+
	2318.216F-ACOT-72	25W	700 mA	2873 lm	1931 lm	30°/40°/50°/57° (Lens)	3000K	90+
	2318.216F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2318.167-LEE-15A
2318.167-LEE-15
2318.167-LEE-15-DW



Dimmable




Optional Accessory




H7-1 Honeycomb louver ACSN-17-BK Snoot ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2318.167-ACOT-72
2318.167-ACOT-72-WCW




ⓐ Cut out : 95mm (Trim-A)

2318.137-LEE-15A
2318.137-LEE-15
2318.137-LEE-15-DW




ⓐ Cut out : 100mm (Trim-B)

2318.137-ACOT-72
2318.137-ACOT-72-WCW




ⓐ Cut out : 100mm (Trim-B)

2318.216F-LEE-15A
2318.216F-LEE-15
2318.216F-LEE-15-DW



ⓐ Cut out : 100mm (Trimless)

2318.216F-ACOT-72
2318.216F-ACOT-72-WCW





ⓐ Cut out : 100mm (Trimless)

IES



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.37	8330
2.0	0.74	2083
3.0	1.11	925
4.0	1.48	520
5.0	1.85	333



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.57	5237
2.0	1.15	1309
3.0	1.72	581
4.0	2.30	327
5.0	2.87	209



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
45°		
1.0	0.78	3139
2.0	1.56	784
3.0	2.33	348
4.0	3.11	196
5.0	3.89	125



Adjustable

2318.167-LEE-15
2318.137-LEE-15
2318.216F-LEE-15





H(m)	D(m)	E(lx)
55°		
1.0	0.98	2060
2.0	1.95	515
3.0	2.93	228
4.0	3.91	128
5.0	4.88	82



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.53	5287
2.0	1.07	1322
3.0	1.60	587
4.0	2.14	330
5.0	2.67	211



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.71	4569
2.0	1.43	1142
3.0	2.14	507
4.0	2.86	285
5.0	3.57	182



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72





H(m)	D(m)	E(lx)
50°		
1.0	0.89	2239
2.0	1.77	559
3.0	2.66	248
4.0	3.55	139
5.0	4.43	89



Adjustable

2318.167-ACOT-72
2318.137-ACOT-72
2318.216F-ACOT-72



H(m)	D(m)	E(lx)
57°		
1.0	1.08	1537
2.0	2.16	384
3.0	3.24	170
4.0	4.32	96
5.0	5.40	61

BRANKO-110 Round-Fixed-Pinhole

BRANKO A-110P-RTF
BRANKO B-110P-RTF
BRANKO B-110P-RTLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A	 2318.132-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.132-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.132-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	 2318.132-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.132-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.




Trim-B	 2318.134-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.134-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.134-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	 2318.134-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.134-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



Trimless	 2318.215F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.215F-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2318.215F-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	 2318.215F-ACOT-72	25W	700 mA	2873 lm	1696 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.215F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2318.132-LEE-15A
2318.132-LEE-15
2318.132-LEE-15-DW



 Cut out : 95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2318.132-ACOT-72
2318.132-ACOT-72-WCW




 Cut out : 95mm (Trim-A)

2318.134-LEE-15A
2318.134-LEE-15
2318.134-LEE-15-DW




 Cut out : 100mm (Trim-B)

2318.134-ACOT-72
2318.134-ACOT-72-WCW




 Cut out : 100mm (Trim-B)

2318.215F-LEE-15A
2318.215F-LEE-15
2318.215F-LEE-15-DW



 Cut out : 100mm (Trimless)

2318.215F-ACOT-72
2318.215F-ACOT-72-WCW





 Cut out : 100mm (Trimless)

IES



Fixed UGR<10

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.49	5199
2.0	0.98	1300
3.0	1.47	577
4.0	1.96	324
5.0	2.44	207



Fixed UGR<10

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.67	4601
2.0	1.34	1150
3.0	2.02	511
4.0	2.69	287
5.0	3.37	184



Fixed UGR<16

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	3291
2.0	1.69	822
3.0	2.53	365
4.0	3.39	205
5.0	4.23	131



Fixed UGR<22

2318.132-ACOT-72
2318.134-ACOT-72
2318.215F-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	2377
2.0	2.03	594
3.0	3.04	264
4.0	4.06	148
5.0	5.07	95

BRANKO-110 Round-Adjustable-Pinhole


BRANKO A-110P-RTA
BRANKO B-110P-RTA
BRANKO B-110P-RTLA



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.168-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.168-LEE-15	17W	500 mA	2004 lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.168-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	2318.168-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.168-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
*Also available in IP54 for varied protection needs.								
↓ IP20 ↑ IP54								
Trim-B								
	2318.138-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.138-LEE-15	17W	500 mA	2004lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.138-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	2318.138-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.138-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
Trimless								
	2318.217F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.217F-LEE-15	17W	500 mA	2004lm	1463 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.217F-LEE-15-DW	16W	450 mA	34-1507 lm	876 lm	20°/25°/39°/42° (Lens)	1800-3000K	90+
	2318.217F-ACOT-72	25W	700 mA	2873 lm	1729 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.217F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

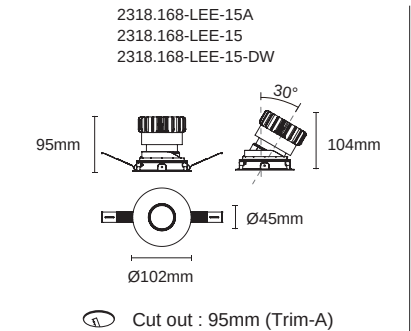


Dimmable




Optional Accessory






Cut out : 95mm (Trim-A)

2318.138-LEE-15A
2318.138-LEE-15
2318.138-LEE-15-DW




Cut out : 100mm (Trim-B)

2318.138-ACOT-72
2318.138-ACOT-72-WCW




Cut out : 100mm (Trim-B)

2318.217F-LEE-15A
2318.217F-LEE-15
2318.217F-LEE-15-DW



Cut out : 100mm (Trimless)

2318.217F-ACOT-72
2318.217F-ACOT-72-WCW





Cut out : 100mm (Trimless)

IES



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.36	8557
2.0	0.72	2139
3.0	1.07	950
4.0	1.43	534
5.0	1.79	342



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.56	5302
2.0	1.12	1325
3.0	1.68	589
4.0	2.24	331
5.0	2.80	212



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
40°		
1.0	0.76	3158
2.0	1.52	789
3.0	2.29	350
4.0	3.05	197
5.0	3.81	126



Adjustable

2318.168-LEE-15
2318.138-LEE-15
2318.217F-LEE-15





H(m)	D(m)	E(lx)
50°		
1.0	0.95	2067
2.0	1.90	516
3.0	2.85	229
4.0	3.80	129
5.0	4.75	82



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.49	5210
2.0	0.99	1302
3.0	1.48	578
4.0	1.98	325
5.0	2.47	208



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.68	4606
2.0	1.37	1152
3.0	2.05	511
4.0	2.73	287
5.0	3.42	184



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	3274
2.0	1.70	818
3.0	2.54	363
4.0	3.39	204
5.0	4.24	130



Adjustable

2318.168-ACOT-72
2318.138-ACOT-72
2318.217F-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	2371
2.0	2.02	592
3.0	3.03	263
4.0	4.04	148
5.0	5.05	94

BRANKO-110 Square-Fixed-Cone

BRANKO A-110C-STF
BRANKO B-110C-STF
BRANKO B-110C-STLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
------	----------------	-----------------	---------	-----------	-----------------	------------	-----	-----

Trim-A

	2418.116-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.116-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.116-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.116-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.116-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B

	2418.113-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.113-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.113-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.113-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.113-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless

	2418.204A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.204A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.204A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.204A-ACOT-72	25W	700 mA	2873 lm	1720 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.204A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2418.116-LEE-15A
2418.116-LEE-15
2418.116-LEE-15-DW



 Cut out : 95X95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2418.116-ACOT-72
2418.116-ACOT-72-WCW




Cut out : 95X95mm (Trim-A)

2418.113-LEE-15A
2418.113-LEE-15
2418.113-LEE-15-DW




Cut out : 100X100mm (Trim-B)

2418.113-ACOT-72
2418.113-ACOT-72-WCW




Cut out : 100X100mm (Trim-B)

2418.204A-LEE-15A
2418.204A-LEE-15
2418.204A-LEE-15-DW



Cut out : 100X100mm (Trimless)

2418.204A-ACOT-72
2418.204A-ACOT-72-WCW





Cut out : 100X100mm (Trimless)

IES

30°

Fixed UGR<10

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.51	5088
2.0	1.02	1272
3.0	1.53	565
4.0	2.04	318
5.0	2.54	203

40°

Fixed UGR<10

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	4519
2.0	1.38	1130
3.0	2.07	502
4.0	2.77	282
5.0	3.46	180

46°

Fixed UGR<10

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	3259
2.0	1.70	814
3.0	2.55	362
4.0	3.40	203
5.0	4.24	130

55°

Fixed UGR<16

2418.116-ACOT-72
2418.113-ACOT-72
2418.204A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.02	2343
2.0	2.04	585
3.0	3.06	260
4.0	4.09	146
5.0	5.11	93

BRANKO-110 Square-Adjustable-Cone

BRANKO A-110C-STA
BRANKO B-110C-STA
BRANKO B-110C-STLA



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
------	----------------	-----------------	---------	-----------	-----------------	------------	-----	-----

Trim-A

	2418.118-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.118-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.118-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.118-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.118-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B

	2418.115-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.115-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.115-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.115-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.115-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless

	2418.206A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.206A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.206A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.206A-ACOT-72	25W	700 mA	2873 lm	1688 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2418.206A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2418.118-LEE-15A
2418.118-LEE-15
2418.118-LEE-15-DW

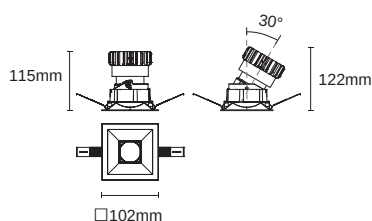

 Cut out : 95X95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver ACSN-17-BK Snoot ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2418.118-ACOT-72
2418.118-ACOT-72-WCW

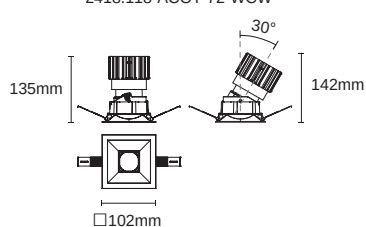


Cut out : 95X95mm (Trim-A)

2418.115-LEE-15A
2418.115-LEE-15
2418.115-LEE-15-DW




Cut out : 100X100mm (Trim-B)

2418.115-ACOT-72
2418.115-ACOT-72-WCW




Cut out : 100X100mm (Trim-B)

2418.206A-LEE-15A
2418.206A-LEE-15
2418.206A-LEE-15-DW



Cut out : 100X100mm (Trimless)

2418.206A-ACOT-72
2418.206A-ACOT-72-WCW





Cut out : 100X100mm (Trimless)



30°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.50	5116
2.0	1.00	1279
3.0	1.51	568
4.0	2.01	319
5.0	2.51	204



40°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	4508
2.0	1.38	1127
3.0	2.07	500
4.0	2.75	281
5.0	3.44	180



46°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.85	3242
2.0	1.69	810
3.0	2.54	360
4.0	3.38	202
5.0	4.23	129



55°

Adjustable

2418.118-ACOT-72
2418.115-ACOT-72
2418.206A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.01	2337
2.0	2.02	584
3.0	3.03	259
4.0	4.04	146
5.0	5.05	93

BRANKO-110 Square-Fixed-Pinhole

BRANKO A-110P-STF
BRANKO B-110P-STF
BRANKO B-110P-STLF



Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
------	----------------	-----------------	---------	-----------	-----------------	------------	-----	-----

Trim-A

	2418.117-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.117-LEE-15	17W	500 mA	2004 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.117-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.117-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.117-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

*Also available in IP54 for varied protection needs.



Trim-B

	2418.114-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.114-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.114-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.114-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.114-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless

	2418.205A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2418.205A-LEE-15	17W	500 mA	2004lm	-	15°/24°/36°/50° (Lens)	3000K	90+
	2418.205A-LEE-15-DW	16W	450 mA	34-1507 lm	-	15°/24°/36°/50° (Lens)	1800-3000K	90+
	2418.205A-ACOT-72	25W	700 mA	2873 lm	1721 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2418.205A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+



2418.117-LEE-15A
2418.117-LEE-15
2418.117-LEE-15-DW



 Cut out : 95X95mm (Trim-A)

Dimmable




Optional Accessory




H7-1 Honeycomb louver ACOT-82 MR16 Accessory kits ACOT-83 GU10 Accessory kits PJ-0079 MR16&GU10 Accessory

2418.117-ACOT-72
2418.117-ACOT-72-WCW




Cut out : 95X95mm (Trim-A)

2418.114-LEE-15A
2418.114-LEE-15
2418.114-LEE-15-DW




Cut out : 100X100mm (Trim-B)

2418.114-ACOT-72
2418.114-ACOT-72-WCW




Cut out : 100X100mm (Trim-B)

2418.205A-LEE-15A
2418.205A-LEE-15
2418.205A-LEE-15-DW



Cut out : 100X100mm (Trimless)

2418.205A-ACOT-72
2418.205A-ACOT-72-WCW





Cut out : 100X100mm (Trimless)

IES



Fixed UGR<10

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.51	5102
2.0	1.01	1276
3.0	1.52	566
4.0	2.02	318
5.0	2.53	204



Fixed UGR<10

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.69	4664
2.0	1.37	1166
3.0	2.06	518
4.0	2.74	291
5.0	3.43	186



Fixed UGR<13

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	3327
2.0	1.69	831
3.0	2.53	369
4.0	3.38	207
5.0	4.22	133



Fixed UGR<19

2418.117-ACOT-72
2418.114-ACOT-72
2418.205A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	1.00	2410
2.0	2.01	602
3.0	3.01	267
4.0	4.02	150
5.0	5.02	96

BRANKO-110 Square-Adjustable-Pinhole

BRANKO A-110P-STA
BRANKO B-110P-STA
BRANKO B-110P-STLA




Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐

Type	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim-A								
	2318.169-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.169-LEE-15	17W	500 mA	2004 lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.169-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.169-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.169-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+


*Also available in IP54 for varied protection needs.



Trim-B								
	2318.154-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.154-LEE-15	17W	500 mA	2004lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.154-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.154-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.154-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+




Trimless								
	2318.218A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2318.218A-LEE-15	17W	500 mA	2004lm	1435 lm	20°/30°/40°/50° (Lens)	3000K	90+
	2318.218A-LEE-15-DW	16W	450 mA	34-1507 lm	916 lm	20°/25°/37°/41° (Lens)	1800-3000K	90+
	2318.218A-ACOT-72	25W	700 mA	2873 lm	1684 lm	30°/40°/46°/55° (Lens)	3000K	90+
	2318.218A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

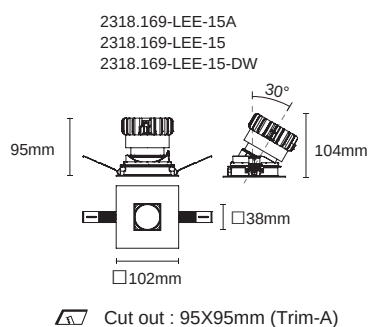


Dimmable




Optional Accessory

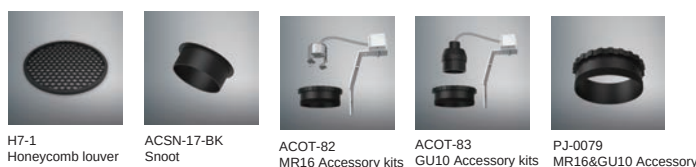





Cut out : 95X95mm (Trim-A)




Cut out : 100X100mm (Trim-B)



Cut out : 100X100mm (Trim-B)



Cut out : 100X100mm (Trimless)





Cut out : 100X100mm (Trimless)

IES



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.35	8310
2.0	0.70	2078
3.0	1.05	923
4.0	1.40	519
5.0	1.75	332



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.56	5219
2.0	1.11	1305
3.0	1.67	579
4.0	2.22	326
5.0	2.79	208



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
40°		
1.0	0.77	3116
2.0	1.53	778
3.0	2.30	346
4.0	3.06	194
5.0	3.83	124



Adjustable

2318.169-LEE-15
2318.154-LEE-15
2318.218A-LEE-15





H(m)	D(m)	E(lx)
50°		
1.0	0.95	2054
2.0	1.91	513
3.0	2.86	228
4.0	3.81	128
5.0	4.76	82



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
30°		
1.0	0.50	5027
2.0	1.00	1257
3.0	1.50	558
4.0	2.00	314
5.0	2.50	201



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
40°		
1.0	0.68	4616
2.0	1.36	1154
3.0	2.04	512
4.0	2.72	288
5.0	3.40	184



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72





H(m)	D(m)	E(lx)
46°		
1.0	0.84	3309
2.0	1.68	827
3.0	2.53	367
4.0	3.37	206
5.0	4.21	132



Adjustable

2318.169-ACOT-72
2318.154-ACOT-72
2318.218A-ACOT-72



H(m)	D(m)	E(lx)
55°		
1.0	0.99	2398
2.0	1.97	599
3.0	2.96	266
4.0	3.95	149
5.0	4.93	95