


EDELWEISS SERIES (EU)

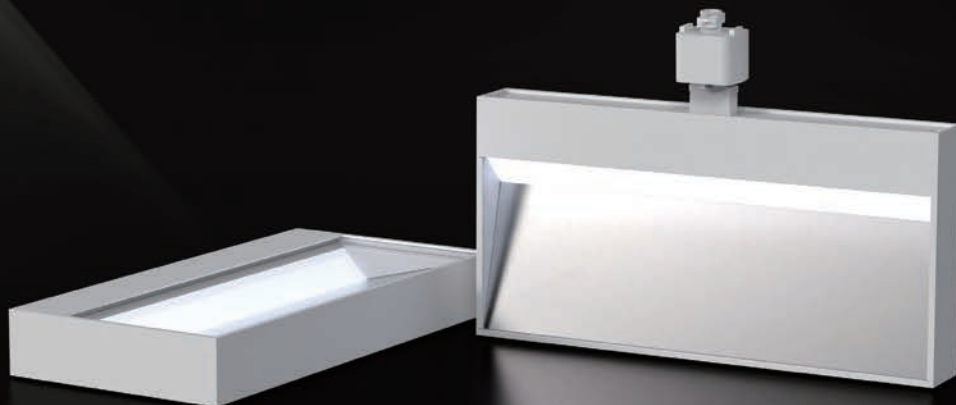

EDELWEISS (EU)


The Edelweiss series provides a well-proportioned wall-washing light effect. Its neat design leaves the elegant illuminate emanation as the only protagonist on the wall. The attached rotatable and tiltable functions can let the user adjust the way the illuminates as they wish.

With the built-in driver design, the user doesn't need to create a big cut-out hole in the wall for the installation. In other words, a tiny cable hole and the mounting plate will be enough for the Edelweiss series' installation.





Wall




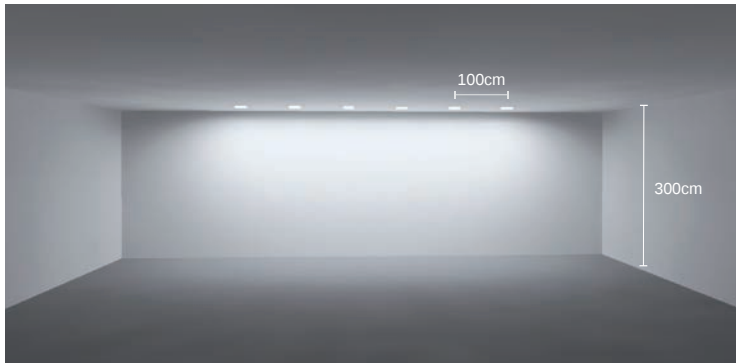



(2219.207)

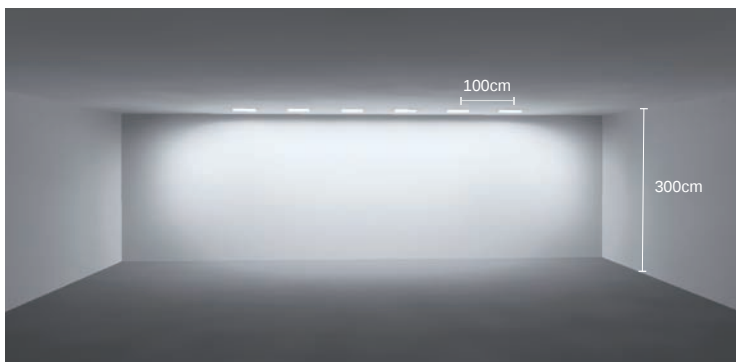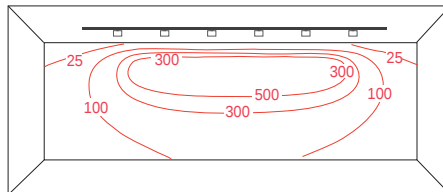

(2219.206)

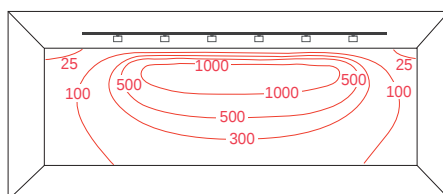

The track lighting provides excellent uniform illumination for product shelves or exhibits, innovative photometry optimizes its efficiency, and a very wide range of light control supports the aesthetics, thus even reducing the number of luminaires still achieve the required performance.

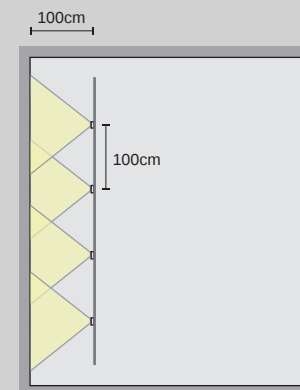


Track lighting

H:300cm

Suggested height to ceiling:100cm

Distance between fixtures:100cm



X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1 : 3 (M)







Colours

Body : Black ☒ White ☐

Type	Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2219.207	22W	AC 220-240V	550 mA	-	1998 lm	Wallwash	3000K	90+
	2219.206	37W	AC 220-240V	900 mA	-	3063 lm	Wallwash	3000K	90+


Dimmable



IES





2219.207





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.98	347
2.0	1.97	86
3.0	2.95	38
4.0	3.94	21
5.0	4.92	13




2219.206





H(m)	D(m)	E(lx)
Wallwash		
1.0	1.10	710
2.0	2.20	177
3.0	3.30	78
4.0	4.40	44
5.0	5.50	28

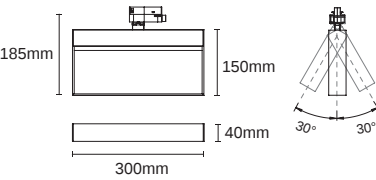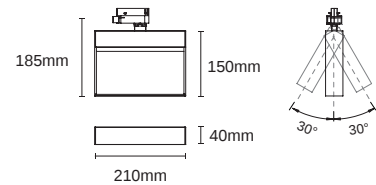




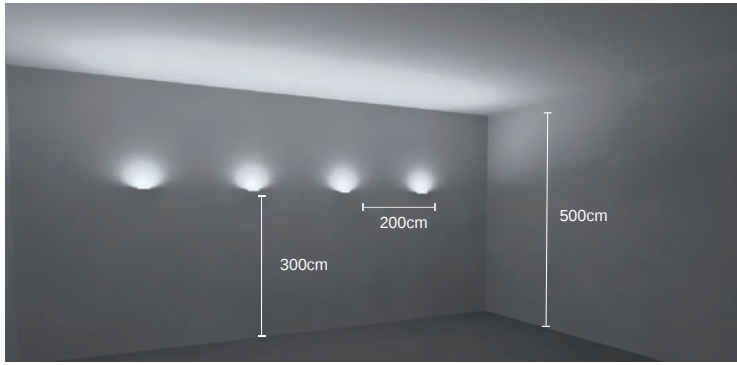



(2215.108)

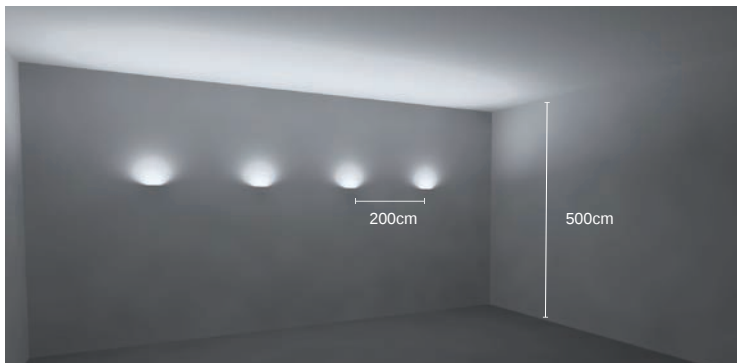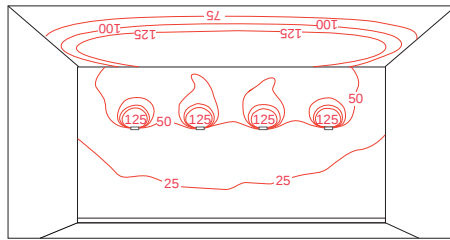

(2215.106)

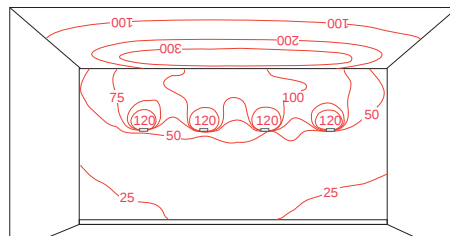

Wall-mounted luminaires focus on adding illumination to ceilings, ensuring that the minimum number of luminaires provides optimal lighting for ceilings, representing not only an effective but also a cost-efficient lighting solution.

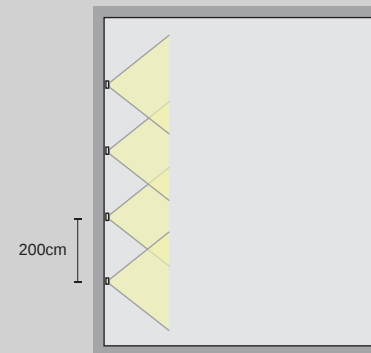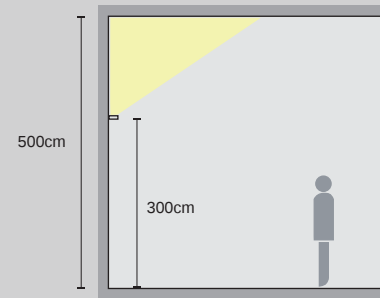


Wall lighting

H:300cm

Suggested height to ceiling:200cm

Distance between fixtures:200cm

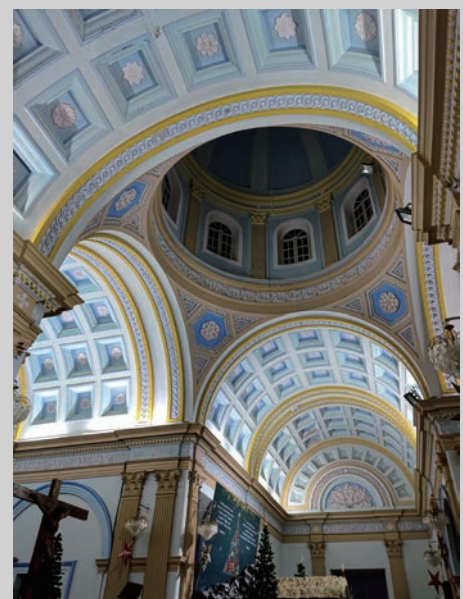







Colours

Body : Black  White 

Type	Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2215.108	22W	AC 220-240V	550 mA	-	1998 lm	Wallwash	3000K	90+
	2215.106	37W	AC 220-240V	900 mA	-	3063 lm	Wallwash	3000K	90+




Dimmable



IES




2215.108



H(m)	D(m)	E(lx)
75°		
1.0	0.98	347
2.0	1.97	86
3.0	2.95	38
4.0	3.94	21
5.0	4.92	13



2215.106



H(m)	D(m)	E(lx)
75°		
1.0	1.10	710
2.0	2.20	177
3.0	3.30	78
4.0	4.40	44
5.0	5.50	28

