EPIC SERIES (EU)



EPIC (EU)

Designed base on the concept of “light engine modularization”, making EPIC series possible to be more flexible, more practical and expandable. The features are as follows:

* Modularized design–easy maintenance & replacement
* Maximize common components to reduce stock cost
* Speed up the progress of new series development in the future
* Interchangeable design to increase product flexibility
* Set up design norms by modularization, minimize possible faults



EPIC 65/85/110/135

Recessed downlights



ACOT-68



ACOT-69-WCW
Tunable white



ACOT-70
ACOT-70A Narrow beam
ACOT-70-WCW Tunable white

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable	85 Wallwash
Round					
Trim					
Trimless					
Square					
Trim					
Trimless					



LEE-15
LEE-15A Narrow beam
LEE-15-DW Dim to warm



ACOT-72
ACOT-72-WCW Tunable white



ACOT-73
ACOT-73-WCW Tunable white

	110 Fixed	110 Adjustable	110 Wallwash	135 Fixed	135 Adjustable	135 Wallwash
Round						
Trim						
Trimless						
Square						
Trim						
Trimless						

EPIC (EU)

Light source
CRI 90
2700 or 3000 or 4000 Kelvin
Tunable White



Lens
10°
15°
20°-30°
30°-40°
40°-50°
50°-60°



Accessories
Diffusion sheet
Striped glass
Woven glass
Honeycomb louver



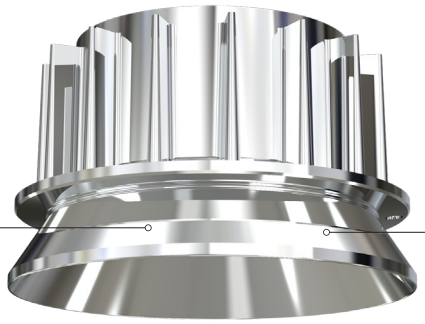

Round or **Square**
Fixed
Adjustable 0°-30°



Material available
Aluminium die cast : White/ Black/ Haze/ Gold
Plastic : Chrome



Round or **Square**
Trim or **Trimless**





Prevent light leak

Adding an extra component to the fixture prevent people seeing through the fixture a very tender thought from our designer

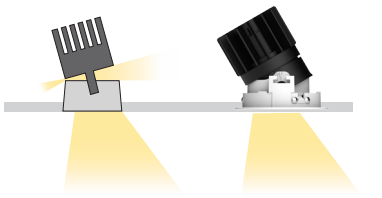

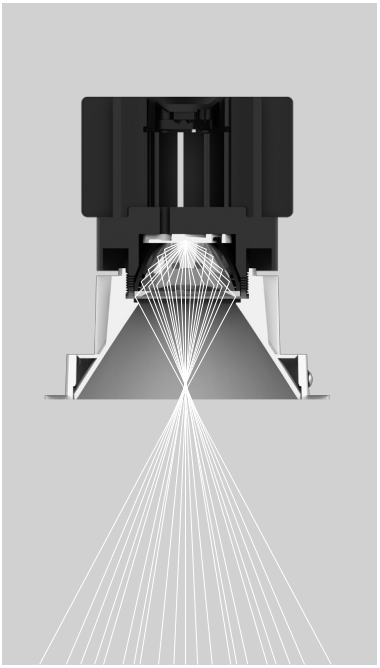

Material and color

Trim: Aluminium die cast, White/ Black



Baffle finish :

1. Aluminium die cast : White/ Black/ Haze/ Gold
2. Plastic : Chrome

Optics

Deep baffle design helps reduce glare, equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed, making EPIC a unique series.

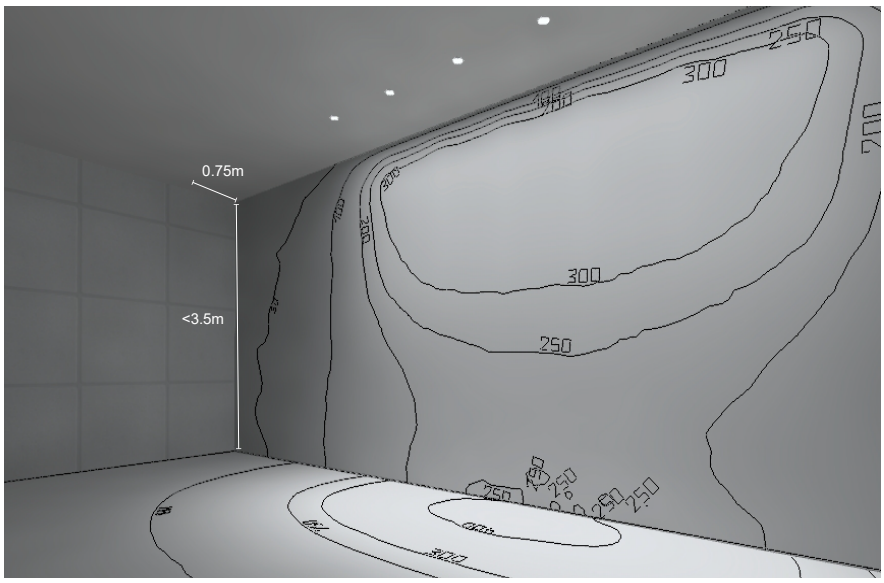

Wallwash

EPIC a wallwash enables even illumination on the target wall without shadows. It supplies an overall effect that is clean and elegant. Generally speaking, the distance between the lighting fixture and the height of the illuminated wall ranges from 1/3 to 1/5. This wallwash function; not only broadens the illumination effect with smooth lights performance but also makes the entire area feels brighter. When combining with other function fixtures together, it can form a fusion of beauty.



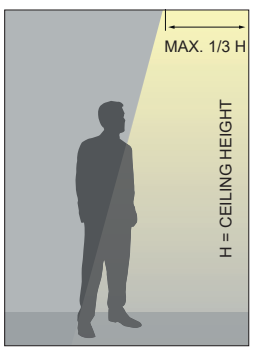



RECOMMENDED DISTANCES (Meter)

A : H : B 0.75 : <3.5 : 0.75 (m)



Advantage of light
With narrow beam

The narrower the angle, the better the condensing effect. As the beam is more focused, it maintains its intensity over greater distances, allowing the light to travel further. It helps to effectively reduce the overflow of light, make the light spot slender and clean, and achieve an excellent focused lighting effect. It is suitable for where the application needs narrow beam lights, such as artworks, indoor landscapes, museums, galleries, and showcases.

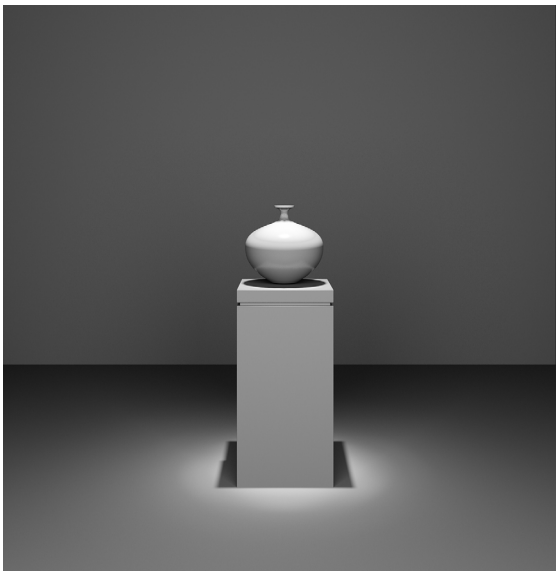

Ultra narrow beam

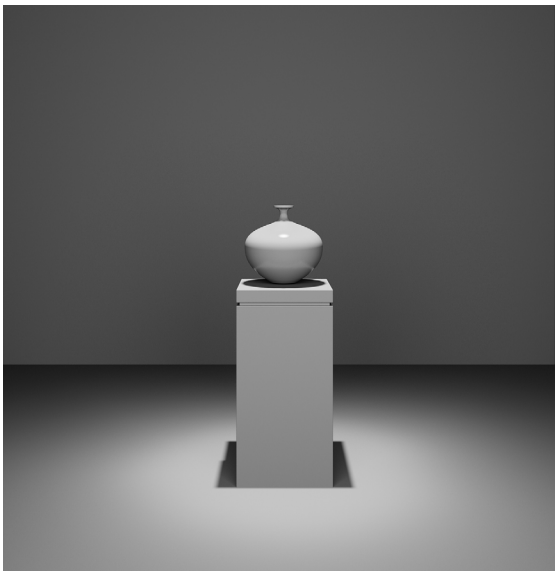

Standard beam



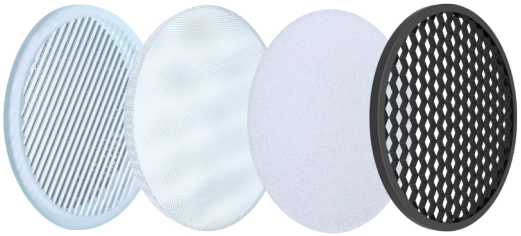

Striped glass Woven glass Diffusion sheet Honeycomb louver

With more options to the accessories, epic adds more
Flexibility and freedom for the lighting designer.
Honeycomb reduces glare; strip glass creates oval distribution;
Diffusion sheet & woven glass soften and even spread the light.

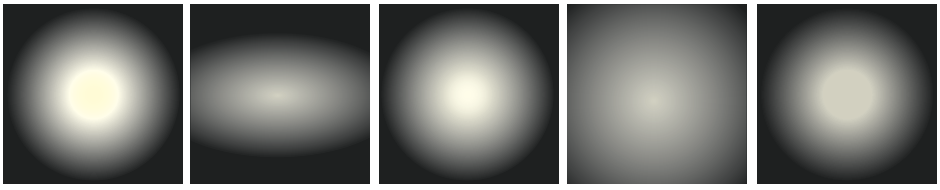

Lens (no accessory) Striped glass Woven glass Diffusion sheet Honeycomb louver



Dim to warm

This light engine features Dim to Warm, the ultimate in dimming comfort, where the light changes its colour temperature according to the dimming curve; the darker the light, the warmer the light. Like a sunset effect, the gradual change replicates the transition from a comfortable ambience to a relaxing and soothing environment.

Dim to Warm is the term used to describe the function of LEDs to reduce the colour temperature (CCT) of the light as it dims, from 3000K at 100% to 1800K at nearly 0%.

The light provides a relaxing ambience for a typical evening dining experience, reading in bed, a moody hotel lobby or bar environment. By moving from dim to warm, we provide a light source that is alert and bright when cooking or working, then dimmed to provide a warm ambience for hosting and relaxing in the evening.

Tunable white

Changes in light colour can have a significant impact on our mood. This light engine with Tunable White drivers allows the colour temperature to be continuously adjusted from 2700 K (warm light) to 6500 K (cool light) to provide uniform, high quality lighting that dynamically adjusts to the time of day or ambient brightness. It allows designers to simulate daylight for productivity and well-being, retailers to influence shoppers' behaviour, and luminaire manufacturers to simulate the familiar glow and dimming of incandescent lamps.













Easy installation

Easy to replace, quick to assemble and completely tool-free.



EPIC-65

Round / Square | Fixed
Adjustable

EPIC-65 Round-Fixed

EPIC-65-RTF
EPIC-65-RTLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ◧ Chrome ◪

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.100-ACOT-68	10W	250 mA	913 lm	766 lm	20°/40°/55° (Lens)	3000K	90+
	2118.100-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+
Trimless								
	2118.200F-ACOT-68	10W	250 mA	913 lm	766 lm	20°/40°/55° (Lens)	3000K	90+
	2118.200F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+



Cut out : 60mm (Trim)



Cut out : 60mm (Trim)



Cut out : 60mm (Trimless)



Cut out : 60mm (Trimless)

Dimmable





Optional Accessory



ACSG-5
Striped glass



ACHO-6
Honeycomb louver



ACDS-3
Diffusion sheet



ACWG-6
Woven glass



ACOT-107
Suction cup

IES

20°

Fixed UGR<13

2118.100-ACOT-68
2118.200F-ACOT-68





H(m)	D(m)	E(lx)
	20°	
1.0	0.36	4633
2.0	0.72	1158
3.0	1.08	514
4.0	1.44	289
5.0	1.80	185

40°

Fixed UGR<16

2118.100-ACOT-68
2118.200F-ACOT-68





H(m)	D(m)	E(lx)
	40°	
1.0	0.77	1465
2.0	1.55	366
3.0	2.32	162
4.0	3.10	91
5.0	3.87	58

55°

Fixed UGR<22

2118.100-ACOT-68
2118.200F-ACOT-68





H(m)	D(m)	E(lx)
	55°	
1.0	0.94	1022
2.0	1.89	255
3.0	2.83	113
4.0	3.78	63
5.0	4.72	40

EPIC-65 Round-Adjustable

EPIC-65-RTA
EPIC-65-RTLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■ Chrome ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.101-ACOT-68	10W	250 mA	913 lm	767 lm	20°/40°/55° (Lens)	3000K	90+
	2118.101-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+
Trimless								
	2118.201F-ACOT-68	10W	250 mA	913 lm	767 lm	20°/40°/55° (Lens)	3000K	90+
	2118.201F-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+



Cut out : 60mm (Trim)



Cut out : 60mm (Trim)



Cut out : 60mm (Trimless)



Cut out : 60mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V



Optional Accessory



ACSG-5
Striped glass



ACHO-6
Honeycomb louver



ACDS-3
Diffusion sheet



ACWG-6
Woven glass



ACOT-107
Suction cup

IES

20°

Adjustable

2118.101-ACOT-68
2118.201F-ACOT-68





H(m)	D(m)	E(lx)
	20°	
1.0	0.35	4878
2.0	0.69	1220
3.0	1.04	542
4.0	1.38	305
5.0	1.73	195

40°

Adjustable

2118.101-ACOT-68
2118.201F-ACOT-68





H(m)	D(m)	E(lx)
	40°	
1.0	0.75	1540
2.0	1.50	384
3.0	2.26	171
4.0	3.01	96
5.0	3.76	61

55°

Adjustable

2118.101-ACOT-68
2118.201F-ACOT-68





H(m)	D(m)	E(lx)
	55°	
1.0	0.95	1017
2.0	1.89	254
3.0	2.84	113
4.0	3.78	63
5.0	4.73	40

EPIC-65 Square-Fixed

EPIC-65-STF
EPIC-65-STLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.103-ACOT-68	10W	250 mA	913 lm	796 lm	20°/40°/55° (Lens)	3000K	90+
	2118.103-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+
Trimless								
	2118.203A-ACOT-68	10W	250 mA	913 lm	796 lm	20°/40°/55° (Lens)	3000K	90+
	2118.203A-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+



Cut out : 60x60mm (Trim)



Cut out : 60x60mm (Trim)



Cut out : 60x60mm (Trimless)



Cut out : 60x60mm (Trimless)

Dimmable

TRIAC | 1-10V

33° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-5
Striped glass



ACHO-6
Honeycomb louver



ACDS-3
Diffusion sheet



ACWG-6
Woven glass



ACOT-107
Suction cup

IES

20°

Fixed UGR<16

2118.103-ACOT-68
2118.203A-ACOT-68





H(m)	D(m)	E(lx)
	20°	
1.0	0.35	4705
2.0	0.70	1176
3.0	1.05	522
4.0	1.39	294
5.0	1.74	188

40°

Fixed UGR<16

2118.103-ACOT-68
2118.203A-ACOT-68





H(m)	D(m)	E(lx)
	40°	
1.0	0.77	1558
2.0	1.53	389
3.0	2.30	173
4.0	3.07	97
5.0	3.83	62

55°

Fixed UGR<22

2118.103-ACOT-68
2118.203A-ACOT-68





H(m)	D(m)	E(lx)
	55°	
1.0	0.93	1020
2.0	1.87	255
3.0	2.80	113
4.0	3.73	63
5.0	4.67	40

EPIC-65 Square-Adjustable

EPIC-65-STA
EPIC-65-STLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.104-ACOT-68	10W	250 mA	913 lm	755 lm	20°/40°/55° (Lens)	3000K	90+
	2118.104-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+
Trimless								
	2118.204A-ACOT-68	10W	250 mA	913 lm	755 lm	20°/40°/55° (Lens)	3000K	90+
	2118.204A-ACOT-69-WCW	10W	250 mA	680-882 lm	-	20°/40°/55° (Lens)	2700-6500K	90+



Cut out : 60x60mm (Trim)



Cut out : 60x60mm (Trim)



Cut out : 60x60mm (Trimless)



Cut out : 60x60mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

32° Cut-off | 30° | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-5
Striped glass



ACHO-6
Honeycomb louver



ACDS-3
Diffusion sheet



ACWG-6
Woven glass



ACOT-107
Suction cup

IES

20°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68





H(m)	D(m)	E(lx)
	20°	
1.0	0.35	4619
2.0	0.69	1155
3.0	1.04	513
4.0	1.38	288
5.0	1.73	184

40°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68





H(m)	D(m)	E(lx)
	40°	
1.0	0.76	1521
2.0	1.52	380
3.0	2.27	169
4.0	3.03	95
5.0	3.79	60

55°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68





H(m)	D(m)	E(lx)
	55°	
1.0	0.95	1021
2.0	1.90	255
3.0	2.85	113
4.0	3.81	63
5.0	4.76	40



EPIC-85

Round / Square

Fixed
Adjustable
Wallwash

EPIC-85 Round-Fixed

EPIC-85-RTF
EPIC-85-RTLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.106-ACOT-70A	10W	800 mA	774 lm	526 lm	13° (Lens)	3000K	90+
	2118.106-ACOT-70	12W	350 mA	1446 lm	1265 lm	30°/50°/60° (Lens)	3000K	90+
	2118.106-ACOT-70-WCW	13W	350 mA	1143-1356 lm	622-725 lm	30°/40°/50° (Lens)	2700-6500K	90+
Trimless								
	2118.206F-ACOT-70A	10W	800 mA	774 lm	526 lm	13° (Lens)	3000K	90+
	2118.206F-ACOT-70	12W	350 mA	1446 lm	1265 lm	30°/50°/60° (Lens)	3000K	90+
	2118.206F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	622-725 lm	30°/40°/50° (Lens)	2700-6500K	90+



Cut out : 80mm (Trim)



Cut out : 80mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

32° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory


ACSG-4
Striped glass


ACHO-5
Honeycomb louver


ACDS-4
Diffusion sheet


ACWG-5
Woven glass


ACOT-108
Suction cup

13°

Fixed UGR<10

2118.106-ACOT-70A
2118.206F-ACOT-70A





H(m)	D(m)	E(lx)
	13°	
1.0	0.23	5576
2.0	0.46	1394
3.0	0.70	619
4.0	0.93	348
5.0	1.16	223

30°

Fixed UGR<19

2118.106-ACOT-70
2118.206F-ACOT-70





H(m)	D(m)	E(lx)
	30°	
1.0	0.50	3470
2.0	1.01	867
3.0	1.51	385
4.0	2.01	216
5.0	2.52	138

50°

Fixed UGR<19

2118.106-ACOT-70
2118.206F-ACOT-70





H(m)	D(m)	E(lx)
	50°	
1.0	0.92	1862
2.0	1.84	465
3.0	2.76	206
4.0	3.67	116
5.0	4.59	74

60°

Fixed UGR<22

2118.106-ACOT-70
2118.206F-ACOT-70





H(m)	D(m)	E(lx)
	60°	
1.0	1.14	1301
2.0	2.27	325
3.0	3.41	144
4.0	4.54	81
5.0	5.68	52

EPIC-85 Round-Adjustable

EPIC-85-RTA
EPIC-85-RTLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.107-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.107-ACOT-70	12W	350 mA	1446 lm	1124 lm	30°/50°/60° (Lens)	3000K	90+
	2118.107-ACOT-70-WCW	13W	350 mA	1143-1356 lm	607-707 lm	30°/40°/50° (Lens)	2700-6500K	90+
Trimless								
	2118.207F-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.207F-ACOT-70	12W	350 mA	1446 lm	1124 lm	30°/50°/60° (Lens)	3000K	90+
	2118.207F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	607-707 lm	30°/40°/50° (Lens)	2700-6500K	90+



Cut out : 80mm (Trim)



Cut out : 80mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

30° Cut-off | 355° | 30° | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-4
Striped glass



ACHO-5
Honeycomb louver



ACDS-4
Diffusion sheet



ACWG-5
Woven glass



ACOT-108
Suction cup

IES

30°

Adjustable

2118.107-ACOT-70
2118.207F-ACOT-70





H(m)	D(m)	E(lx)
	30°	
1.0	0.49	3409
2.0	0.98	852
3.0	1.46	378
4.0	1.95	213
5.0	2.44	136

50°

Adjustable

2118.107-ACOT-70
2118.207F-ACOT-70





H(m)	D(m)	E(lx)
	50°	
1.0	0.87	1876
2.0	1.73	469
3.0	2.60	208
4.0	3.46	117
5.0	4.33	75

60°

Adjustable

2118.107-ACOT-70
2118.207F-ACOT-70





H(m)	D(m)	E(lx)
	60°	
1.0	1.06	1279
2.0	2.12	319
3.0	3.18	142
4.0	4.24	79
5.0	5.30	51

EPIC-85 Round-Wallwash

EPIC-85-RTW
EPIC-85-RTLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.108-ACOT-70	12W	350 mA	1446 lm	654 lm	Wallwash (Lens)	3000K	90+
	2118.108-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	Wallwash (Lens)	2700-6500K	90+
Trimless								
	2118.208F-ACOT-70	12W	350 mA	1446 lm	654 lm	Wallwash (Lens)	3000K	90+
	2118.208F-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	Wallwash (Lens)	2700-6500K	90+



Cut out : 80mm (Trim)



Cut out : 80mm (Trim)

Dimmable

DALI | TRIAC | 1-10V

355° | IP44 | TUNABLE WHITE

IES

Wallwash

2118.108-ACOT-70
2118.208F-ACOT-70





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.63	1012
2.0	1.27	253
3.0	1.90	112
4.0	2.54	63
5.0	3.17	40



EPIC-85 Square-Fixed

EPIC-85-STF
EPIC-85-STLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▣

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.109-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.109-ACOT-70	12W	350 mA	1446 lm	1172 lm	30°/50°/60° (Lens)	3000K	90+
	2118.109-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	30°/50°/60° (Lens)	2700-6500K	90+
Trimless								
	2118.209A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.209A-ACOT-70	12W	350 mA	1446 lm	1172 lm	30°/50°/60° (Lens)	3000K	90+
	2118.209A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	30°/50°/60° (Lens)	2700-6500K	90+



Cut out : 80x80mm (Trim)



Cut out : 80x80mm (Trimless)

Dimmable

TRIAC | 1-10V

33° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory


ACSG-4
Striped glass


ACHO-5
Honeycomb louver


ACDS-4
Diffusion sheet


ACWG-5
Woven glass


ACOT-108
Suction cup

30°

Fixed UGR<13

2118.109-ACOT-70
2118.209A-ACOT-70





H(m)	D(m)	E(lx)
	30°	
1.0	0.51	3246
2.0	1.02	811
3.0	1.53	360
4.0	2.04	202
5.0	2.55	129

50°

Fixed UGR<16

2118.109-ACOT-70
2118.209A-ACOT-70





H(m)	D(m)	E(lx)
	50°	
1.0	0.88	1889
2.0	1.76	472
3.0	2.64	209
4.0	3.52	118
5.0	4.40	75

60°

Fixed UGR<19

2118.109-ACOT-70
2118.209A-ACOT-70





H(m)	D(m)	E(lx)
	60°	
1.0	1.09	1289
2.0	2.18	322
3.0	3.26	143
4.0	4.35	80
5.0	5.44	51

EPIC-85 Square-Adjustable

EPIC-85-STA
EPIC-85-STLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▣

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.110-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.110-ACOT-70	12W	350 mA	1446 lm	1135 lm	30°/50°/60° (Lens)	3000K	90+
	2118.110-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	30°/50°/60° (Lens)	2700-6500K	90+
Trimless								
	2118.210A-ACOT-70A	10W	800 mA	774 lm	-	10° (Lens)	3000K	90+
	2118.210A-ACOT-70	12W	350 mA	1446 lm	1135 lm	30°/50°/60° (Lens)	3000K	90+
	2118.210A-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	30°/50°/60° (Lens)	2700-6500K	90+



Cut out : 80x80mm (Trim)



Cut out : 80x80mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

30° Cut-off | 30° | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-4
Striped glass



ACHO-5
Honeycomb louver



ACDS-4
Diffusion sheet



ACWG-5
Woven glass



ACOT-108
Suction cup

IES

30°

Adjustable

2118.110-ACOT-70
2118.210A-ACOT-70





H(m)	D(m)	E(lx)
	30°	
1.0	0.49	3438
2.0	0.98	859
3.0	1.48	382
4.0	1.97	214
5.0	2.46	137

50°

Adjustable

2118.110-ACOT-70
2118.210A-ACOT-70





H(m)	D(m)	E(lx)
	50°	
1.0	0.89	1812
2.0	1.79	453
3.0	2.68	201
4.0	3.57	113
5.0	4.46	72

60°

Adjustable

2118.110-ACOT-70
2118.210A-ACOT-70





H(m)	D(m)	E(lx)
	60°	
1.0	1.08	1263
2.0	2.16	315
3.0	3.24	140
4.0	4.32	78
5.0	5.40	50

EPIC-85 Square-Wallwash

EPIC-85-STW
EPIC-85-STLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2118.111-ACOT-70	12W	350 mA	1446 lm	627 lm	Wallwash (Lens)	3000K	90+
	2118.111-ACOT-70-WCW	13W	350 mA	1143-1356 lm	-	Wallwash (Lens)	2700-6500K	90+
Trimless								
	2118.211A-ACOT-70	12W	350 mA	1446 lm	627 lm	Wallwash (Lens)	3000K	90+
	2118.211A-ACOT-70-WCW	13W	350 mA	11143-1356 lm	-	Wallwash (Lens)	2700-6500K	90+



Cut out : 80x80mm (Trim)



Cut out : 80x80mm (Trim)

Dimmable

DALI | TRIAC | 1-10V

IP44 | TUNABLE WHITE

IES

Wallwash

2118.111-ACOT-70
2118.211A-ACOT-70





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.63	995
2.0	1.26	248
3.0	1.89	110
4.0	2.52	62
5.0	3.15	39




02
01
00

EPIC-110

Round / Square

Fixed
Adjustable
wallwash

EPIC-110 Round-Fixed

EPIC-110-RTF
EPIC-110-RTLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.187-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.187-LEE-15	17W	500 mA	2004 lm	1697 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.187-LEE-15-DW	16W	450 mA	34-1507 lm	1200 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.187-ACOT-72	25W	700 mA	2873 lm	2255 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.187-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
Trimless								
	2018.259F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.259F-LEE-15	17W	500 mA	2004lm	1697 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.259F-LEE-15-DW	16W	450 mA	34-1507 lm	1200 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.259F-ACOT-72	25W	700 mA	2873 lm	2255 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.259F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

2018.187-LEE-15
2018.187-LEE-15A
2018.187-LEE-15-DW





Cut out : 100mm (Trim)

Dimmable





Optional Accessory


SG7-1
Striped glass


H7-1
Honeycomb louver


DS7-1
Diffusion sheet


WG7-1
Woven glass


ACOT-109
Suction cup


ACOT-82
MR16 Accessory kits


ACOT-83
GU10 Accessory kits


PJ-0079
MR16&GU10 Accessory

2018.187-ACOT-72
2018.187-ACOT-72-WCW



Cut out : 100mm (Trim)

2018.259F-LEE-15
2018.259F-LEE-15A
2018.259F-LEE-15-DW



Cut out : 100mm (Trimless)

2018.259F-ACOT-72
2018.259F-ACOT-72-WCW



Cut out : 100mm (Trimless)

IES

20°

Fixed UGR<10

2018.187-LEE-15
2018.259F-LEE-15





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	8808
2.0	0.77	2202
3.0	1.15	978
4.0	1.53	550
5.0	1.91	352

30°

Fixed UGR<10

2018.187-LEE-15
2018.259F-LEE-15





H(m)	D(m)	E(lx)
	30°	
1.0	0.59	5545
2.0	1.18	1386
3.0	1.77	616
4.0	2.35	346
5.0	2.94	221

45°

Fixed UGR<13

2018.187-LEE-15
2018.259F-LEE-15





H(m)	D(m)	E(lx)
	45°	
1.0	0.79	3325
2.0	1.58	831
3.0	2.37	369
4.0	3.16	207
5.0	3.94	133

55°

Fixed UGR<19

2018.187-LEE-15
2018.259F-LEE-15





H(m)	D(m)	E(lx)
	55°	
1.0	1.05	2051
2.0	2.11	512
3.0	3.16	227
4.0	4.22	128
5.0	5.27	82

30°

Fixed UGR<16

2018.187-ACOT-72
2018.259F-ACOT-72





H(m)	D(m)	E(lx)
	30°	
1.0	0.58	5365
2.0	1.15	1341
3.0	1.73	596
4.0	2.31	335
5.0	2.88	214

40°

Fixed UGR<16

2018.187-ACOT-72
2018.259F-ACOT-72





H(m)	D(m)	E(lx)
	40°	
1.0	0.74	4751
2.0	1.49	1188
3.0	2.23	527
4.0	2.98	296
5.0	3.72	190

50°

Fixed UGR<19

2018.187-ACOT-72
2018.259F-ACOT-72





H(m)	D(m)	E(lx)
	50°	
1.0	0.94	3396
2.0	1.87	848
3.0	2.81	377
4.0	3.75	212
5.0	4.68	135

60°

Fixed UGR<22

2018.187-ACOT-72
2018.259F-ACOT-72





H(m)	D(m)	E(lx)
	60°	
1.0	1.15	2381
2.0	2.31	595
3.0	3.46	264
4.0	4.62	148
5.0	5.77	95

EPIC-110 Round-Adjustable

EPIC-110-RTA
EPIC-110-RTLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▨

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.191-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.191-LEE-15	17W	500 mA	2004 lm	1702 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.191-LEE-15-DW	16W	450 mA	34-1507 lm	1200 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.191-ACOT-72	25W	700 mA	2873 lm	2207 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.191-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+
Trimless								
	2018.260F-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.260F-LEE-15	17W	500 mA	2004 lm	1702 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.260F-LEE-15-DW	16W	450 mA	34-1507 lm	1200 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.260F-ACOT-72	25W	700 mA	2873 lm	2207 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.260F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700-6500K	90+

2018.191-LEE-15
2018.191-LEE-15A
2018.191-LEE-15-DW



Cut out : 100mm (Trim)

Dimmable

DALI | TRIAC | 1-10V



Optional Accessory



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACOT-109
Suction cup



ACOT-82
MR16 Accessory kits



ACOT-83
GU10 Accessory kits



PJ-0079
MR16&GU10 Accessory

2018.191-ACOT-72
2018.191-ACOT-72-WCW



Cut out : 100mm (Trim)

2018.260F-LEE-15
2018.260F-LEE-15A
2018.260F-LEE-15-DW



Cut out : 100mm (Trimless)

2018.260F-ACOT-72
2018.260F-ACOT-72-WCW



Cut out : 100mm (Trimless)

IES

20°

Adjustable

2018.191-LEE-15
2018.260F-LEE-15





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	8971
2.0	0.77	2243
3.0	1.15	996
4.0	1.53	560
5.0	1.92	358

30°

Adjustable

2018.191-LEE-15
2018.260F-LEE-15





H(m)	D(m)	E(lx)
	30°	
1.0	0.58	5663
2.0	1.17	1416
3.0	1.75	629
4.0	2.34	353
5.0	2.92	226

45°

Adjustable

2018.191-LEE-15
2018.260F-LEE-15





H(m)	D(m)	E(lx)
	45°	
1.0	0.80	3234
2.0	1.60	808
3.0	2.40	359
4.0	3.20	202
5.0	4.00	129

55°

Adjustable

2018.191-LEE-15
2018.260F-LEE-15





H(m)	D(m)	E(lx)
	55°	
1.0	1.07	1995
2.0	2.14	498
3.0	3.21	221
4.0	4.28	124
5.0	5.35	79

30°

Adjustable

2018.191-ACOT-72
2018.260F-ACOT-72





H(m)	D(m)	E(lx)
	30°	
1.0	0.55	5265
2.0	1.10	1316
3.0	1.65	585
4.0	2.20	329
5.0	2.75	210

40°

Adjustable

2018.191-ACOT-72
2018.260F-ACOT-72





H(m)	D(m)	E(lx)
	40°	
1.0	0.74	4677
2.0	1.47	1169
3.0	2.21	519
4.0	2.95	292
5.0	3.68	187

50°

Adjustable

2018.191-ACOT-72
2018.260F-ACOT-72





H(m)	D(m)	E(lx)
	50°	
1.0	0.92	3378
2.0	1.84	844
3.0	2.76	375
4.0	3.68	211
5.0	4.61	135

60°

Adjustable

2018.191-ACOT-72
2018.260F-ACOT-72





H(m)	D(m)	E(lx)
	60°	
1.0	1.13	2374
2.0	2.26	593
3.0	3.39	263
4.0	4.52	148
5.0	5.65	94

EPIC-110 Round-Wallwash

EPIC-110-RTW
EPIC-110-RTLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.192-LEE-15	17W	500 mA	2004 lm	1100 lm	Wallwash (Lens)	3000K	90+
	2018.192-LEE-15-DW	16W	450 mA	34-1507 lm	713 lm	Wallwash (Lens)	1800-3000K	90+
	2018.192-ACOT-72	25W	700 mA	2873 lm	1385 lm	Wallwash (Lens)	3000K	90+
	2018.192-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	Wallwash (Lens)	2700-6500K	90+
Trimless								
	2018.261F-LEE-15	17W	500 mA	2004 lm	1100 lm	Wallwash (Lens)	3000K	90+
	2018.261F-LEE-15-DW	16W	450 mA	34-1507 lm	713 lm	Wallwash (Lens)	1800-3000K	90+
	2018.261F-ACOT-72	25W	700 mA	2873 lm	1385 lm	Wallwash (Lens)	3000K	90+
	2018.261F-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	Wallwash (Lens)	2700-6500K	90+



Cut out : 100mm (Trim)



Cut out : 100mm (Trim)



Cut out : 100mm (Trimless)



Cut out : 100mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

IP44 | 355° | DIM TO WARM | TUNABLE WHITE

IES

Wallwash

2018.192-LEE-15
2018.261F-LEE-15





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.77	1360
2.0	1.54	340
3.0	2.32	151
4.0	3.09	85
5.0	3.86	54

Wallwash

2018.192-ACOT-72
2018.261F-ACOT-72





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.85	1455
2.0	1.17	363
3.0	2.56	161
4.0	3.41	90
5.0	4.27	58



EPIC-110 Square-Fixed

EPIC-110-STF
EPIC-110-STLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.188-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.188-LEE-15	17W	500 mA	2004 lm	1639 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.188-LEE-15-DW	16W	450 mA	34-1507 lm	1212 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.188-ACOT-72	25W	700 mA	2873 lm	2239 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.188-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700K-6500K	90+
Trimless								
	2018.264A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.264A-LEE-15	17W	500 mA	2004lm	1639 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.264A-LEE-15-DW	16W	450 mA	34-1507 lm	1212 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.264A-ACOT-72	25W	700 mA	2873 lm	2239 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.264A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700K-6500K	90+

2018.188-LEE-15
2018.188-LEE-15A
2018.188-LEE-15-DW



Cut out : 100x100mm (Trim)

Dimmable

DALI | TRIAC | 1-10V

30° Cut-off | IP44 | DIM TO WARM | TUNABLE WHITE

Optional Accessory


SG7-1
Striped glass


H7-1
Honeycomb louver


DS7-1
Diffusion sheet


WG7-1
Woven glass


ACOT-109
Suction cup


ACOT-82
MR16 Accessory kits


ACOT-83
GU10 Accessory kits


PJ-0079
MR16&GU10 Accessory

2018.188-ACOT-72
2018.188-ACOT-72-WCW



Cut out : 100x100mm (Trim)

2018.264A-LEE-15
2018.264A-LEE-15A
2018.264A-LEE-15-DW



Cut out : 100x100mm (Trimless)

2018.264A-ACOT-72
2018.264A-ACOT-72-WCW



Cut out : 100x100mm (Trimless)

IES

20°

Fixed UGR<10

2018.188-LEE-15
2018.264A-LEE-15





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	8437
2.0	0.77	2109
3.0	1.15	937
4.0	1.53	527
5.0	1.92	337

30°

Fixed UGR<10

2018.188-LEE-15
2018.264A-LEE-15





H(m)	D(m)	E(lx)
	30°	
1.0	0.59	5246
2.0	1.17	1312
3.0	1.76	582
4.0	2.34	327
5.0	2.93	209

45°

Fixed UGR<13

2018.188-LEE-15
2018.264A-LEE-15





H(m)	D(m)	E(lx)
	45°	
1.0	0.82	2999
2.0	1.63	749
3.0	2.45	333
4.0	3.26	187
5.0	4.08	120

55°

Fixed UGR<16

2018.188-LEE-15
2018.264A-LEE-15





H(m)	D(m)	E(lx)
	55°	
1.0	1.06	2014
2.0	2.12	503
3.0	3.18	223
4.0	4.25	125
5.0	5.31	80

30°

Fixed UGR<10

2018.188-ACOT-72
2018.264A-ACOT-72





H(m)	D(m)	E(lx)
	30°	
1.0	0.57	5456
2.0	1.13	1364
3.0	1.70	606
4.0	2.27	341
5.0	2.84	218

40°

Fixed UGR<10

2018.188-ACOT-72
2018.264A-ACOT-72





H(m)	D(m)	E(lx)
	40°	
1.0	0.74	4794
2.0	1.49	1199
3.0	2.23	532
4.0	2.98	299
5.0	3.72	191

50°

Fixed UGR<13

2018.188-ACOT-72
2018.264A-ACOT-72





H(m)	D(m)	E(lx)
	50°	
1.0	0.93	3425
2.0	1.85	856
3.0	2.78	380
4.0	3.71	214
5.0	4.64	137

60°

Fixed UGR<16

2018.188-ACOT-72
2018.264A-ACOT-72





H(m)	D(m)	E(lx)
	60°	
1.0	1.13	2409
2.0	2.25	602
3.0	3.38	267
4.0	4.50	150
5.0	5.63	96

EPIC-110 Square-Adjustable

EPIC-110-STA
EPIC-110-STLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.195-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.195-LEE-15	17W	500 mA	2004 lm	1616 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.195-LEE-15-DW	16W	450 mA	34-1507 lm	1227 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.195-ACOT-72	25W	700 mA	2873 lm	2208 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.195-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700K-6500K	90+
Trimless								
	2018.265A-LEE-15A	13W	350 mA	1182 lm	-	10° (Lens)	3000K	90+
	2018.265A-LEE-15	17W	500 mA	2004 lm	1616 lm	20°/30°/45°/55°/65° (Lens)	3000K	90+
	2018.265A-LEE-15-DW	16W	450 mA	34-1507 lm	1227 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
	2018.265A-ACOT-72	25W	700 mA	2873 lm	2208 lm	30°/40°/50°/60° (Lens)	3000K	90+
	2018.265A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	30°/40°/50°/60° (Lens)	2700K-6500K	90+

2018.195-LEE-15
2018.195-LEE-15A
2018.195-LEE-15-DW



Cut out : 100x100mm (Trim)

Dimmable

DALI | TRIAC | 1-10V



Optional Accessory



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACOT-109
Suction cup



ACOT-82
MR16 Accessory kits



ACOT-83
GU10 Accessory kits



PJ-0079
MR16&GU10 Accessory

2018.195-ACOT-72
2018.195-ACOT-72-WCW



Cut out : 100x100mm (Trim)

2018.265A-LEE-15
2018.265A-LEE-15A
2018.265A-LEE-15-DW



Cut out : 100x100mm (Trimless)

2018.265A-ACOT-72
2018.265A-ACOT-72-WCW



Cut out : 100x100mm (Trimless)

IES

20°

Adjustable

2018.195-LEE-15
2018.265A-LEE-15





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	8345
2.0	0.77	2086
3.0	1.15	927
4.0	1.53	521
5.0	1.91	333

30°

Adjustable

2018.195-LEE-15
2018.265A-LEE-15





H(m)	D(m)	E(lx)
	30°	
1.0	0.59	5262
2.0	1.18	1316
3.0	1.77	584
4.0	2.36	328
5.0	2.95	210

45°

Adjustable

2018.195-LEE-15
2018.265A-LEE-15





H(m)	D(m)	E(lx)
	45°	
1.0	0.80	3044
2.0	1.60	761
3.0	2.40	338
4.0	3.20	190
5.0	4.01	121

55°

Adjustable

2018.195-LEE-15
2018.265A-LEE-15





H(m)	D(m)	E(lx)
	55°	
1.0	1.05	2042
2.0	2.10	510
3.0	3.15	226
4.0	4.20	127
5.0	5.25	81

30°

Adjustable

2018.195-ACOT-72
2018.265A-ACOT-72





H(m)	D(m)	E(lx)
	30°	
1.0	0.56	5402
2.0	1.12	1351
3.0	1.68	600
4.0	2.24	337
5.0	2.80	216

40°

Adjustable

2018.195-ACOT-72
2018.265A-ACOT-72





H(m)	D(m)	E(lx)
	40°	
1.0	0.74	4744
2.0	1.48	1186
3.0	2.22	527
4.0	2.96	296
5.0	3.71	189

50°

Adjustable

2018.195-ACOT-72
2018.265A-ACOT-72





H(m)	D(m)	E(lx)
	50°	
1.0	0.93	3398
2.0	1.86	849
3.0	2.78	377
4.0	3.71	212
5.0	4.64	135

60°

Adjustable

2018.195-ACOT-72
2018.265A-ACOT-72





H(m)	D(m)	E(lx)
	60°	
1.0	1.13	2373
2.0	2.27	593
3.0	3.40	263
4.0	4.54	148
5.0	5.67	94

EPIC-110 Square-Wallwash

EPIC-110-STW
EPIC-110-STLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.196-LEE-15	17W	500 mA	2004 lm	1062 lm	Wallwash (Lens)	3000K	90+
	2018.196-LEE-15-DW	16W	450 mA	34-1507 lm	739 lm	Wallwash (Lens)	1800-3000K	90+
	2018.196-ACOT-72	25W	700 mA	2873 lm	1396 lm	Wallwash (Lens)	3000K	90+
	2018.196-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	Wallwash (Lens)	2700K-6500K	90+
Trimless								
	2018.266A-LEE-15	17W	500 mA	2004 lm	1062 lm	Wallwash (Lens)	3000K	90+
	2018.266A-LEE-15-DW	16W	450 mA	34-1507 lm	739 lm	Wallwash (Lens)	1800-3000K	90+
	2018.266A-ACOT-72	25W	700 mA	2873 lm	1396 lm	Wallwash (Lens)	3000K	90+
	2018.266A-ACOT-72-WCW	22W	600 mA	2086-2304 lm	-	Wallwash (Lens)	2700K-6500K	90+



Cut out : 100x100mm (Trim)



Cut out : 100x100mm (Trim)



Cut out : 100x100mm (Trimless)



Cut out : 100x100mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

IP44 | DIM TO WARM | TUNABLE WHITE

IES

Wallwash

2018.196-LEE-15
2018.266A-LEE-15





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.78	1264
2.0	1.56	316
3.0	2.34	140
4.0	3.12	79
5.0	3.90	50

Wallwash

2018.196-ACOT-72
2018.266A-ACOT-72





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.86	1399
2.0	1.72	349
3.0	2.59	155
4.0	3.45	87
5.0	4.31	55





EPIC-135

Round / Square

Fixed
Adjustable
wallwash

EPIC-135 Round-Fixed

EPIC-135-RTF
EPIC-135-RTLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ▮ Chrome ▮

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.464-ACOT-73	32W	900 mA	3667 lm	3187 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.464-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+
Trimless								
	2018.256F-ACOT-73	32W	900 mA	3667 lm	3187 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.256F-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+

Dimmable

TRIAC | 1-10V

33° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-1
Striped glass



ACHO-2
Honeycomb louver



ACDS-6
Diffusion sheet



ACWG-1
Woven glass



ACOT-109
Suction cup

IES

20°

Fixed UGR<10

2018.464-ACOT-73
2018.256F-ACOT-73





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	16360
2.0	0.75	4090
3.0	1.13	1818
4.0	1.51	1022
5.0	1.88	654

30°

Fixed UGR<10

2018.464-ACOT-73
2018.256F-ACOT-73





H(m)	D(m)	E(lx)
	30°	
1.0	0.57	10799
2.0	1.14	2700
3.0	1.70	1200
4.0	2.27	674
5.0	2.84	432

45°

Fixed UGR<13

2018.464-ACOT-73
2018.256F-ACOT-73





H(m)	D(m)	E(lx)
	45°	
1.0	0.80	6115
2.0	1.60	1529
3.0	2.40	679
4.0	3.20	382
5.0	4.00	244

55°

Fixed UGR<16

2018.464-ACOT-73
2018.256F-ACOT-73





H(m)	D(m)	E(lx)
	55°	
1.0	1.03	3635
2.0	2.06	908
3.0	3.10	403
4.0	4.13	227
5.0	5.16	145



Cut out : 128mm (Trim)



Cut out : 128mm (Trimless)

EPIC-135 Round-Adjustable

EPIC-135-RTA
EPIC-135-RTLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■ Chrome ■

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.463-ACOT-73	32W	900 mA	3667 lm	3139 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.463-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+
Trimless								
	2018.255F-ACOT-73	32W	900 mA	3667 lm	3139 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.255F-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+

Dimmable

DALI | TRIAC | 1-10V

32° Cut-off | 30° | IP44 | 355° | TUNABLE WHITE

Optional Accessory



ACSG-1
Striped glass



ACHO-2
Honeycomb louver



ACDS-6
Diffusion sheet



ACWG-1
Woven glass



ACOT-109
Suction cup

IES

20°

Adjustable

2018.463-ACOT-73
2018.255F-ACOT-73





H(m)	D(m)	E(lx)
	20°	
1.0	0.37	16240
2.0	0.75	4060
3.0	1.12	1804
4.0	1.49	1015
5.0	1.86	649



Cut out : 128mm (Trim)

30°

Adjustable

2018.463-ACOT-73
2018.255F-ACOT-73





H(m)	D(m)	E(lx)
	30°	
1.0	0.57	10699
2.0	1.14	2675
3.0	1.71	1189
4.0	2.28	668
5.0	2.85	428

45°

Adjustable

2018.463-ACOT-73
2018.255F-ACOT-73





H(m)	D(m)	E(lx)
	45°	
1.0	0.80	6115
2.0	1.60	1529
3.0	2.40	679
4.0	3.20	382
5.0	4.00	244



Cut out : 128mm (Trimless)

55°

Adjustable

2018.463-ACOT-73
2018.255F-ACOT-73





H(m)	D(m)	E(lx)
	55°	
1.0	1.03	3658
2.0	2.07	914
3.0	3.10	406
4.0	4.13	228
5.0	5.16	146

EPIC-135 Round-Wallwash

EPIC-135-RTW
EPIC-135-RTLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2218.146-ACOT-73	32W	900 mA	3667 lm	-	Wallwash (Lens)	3000K	90+
	2218.146-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	Wallwash (Lens)	2700K-6500K	90+
Trimless								
	2218.218F-ACOT-73	32W	900 mA	3667 lm	-	Wallwash (Lens)	3000K	90+
	2218.218F-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	Wallwash (Lens)	2700K-6500K	90+



Cut out : 128mm (Trim)



Cut out : 128mm (Trimless)

Dimmable

DALI | TRIAC | 1-10V

IP44 | 355° | TUNABLE WHITE


B
GALLERY
B
GALLERY

EPIC-135 Square-Fixed

EPIC-135-STF
EPIC-135-STLF





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■ Chrome ■

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.466-ACOT-73	32W	900 mA	3667 lm	3170 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.466-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+
Trimless								
	2018.258A-ACOT-73	32W	900 mA	3667 lm	3170 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.258A-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+

Dimmable

TRIAC | 1-10V

32° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-1
Striped glass



ACHO-2
Honeycomb louver



ACDS-6
Diffusion sheet



ACWG-1
Woven glass



ACOT-109
Suction cup

IES

20°

Fixed UGR<10

2018.466-ACOT-73
2018.258A-ACOT-73





H(m)	D(m)	E(lx)
	20°	
1.0	0.38	15921
2.0	0.75	3980
3.0	1.13	1769
4.0	1.51	995
5.0	1.89	636

30°

Fixed UGR<10

2018.466-ACOT-73
2018.258A-ACOT-73





H(m)	D(m)	E(lx)
	30°	
1.0	0.57	10648
2.0	1.13	2662
3.0	1.70	1183
4.0	2.26	665
5.0	2.83	425

45°

Fixed UGR<13

2018.466-ACOT-73
2018.258A-ACOT-73





H(m)	D(m)	E(lx)
	45°	
1.0	0.78	6283
2.0	1.56	1571
3.0	2.34	698
4.0	3.11	392
5.0	3.89	251

55°

Fixed UGR<16

2018.466-ACOT-73
2018.258A-ACOT-73





H(m)	D(m)	E(lx)
	55°	
1.0	1.02	3744
2.0	2.05	935
3.0	3.07	415
4.0	4.09	234
5.0	5.12	149



Cut out : 128x128mm (Trim)



Cut out : 128x128mm (Trimless)

EPIC-135 Square-Adjustable

EPIC-135-STA
EPIC-135-STLA





Colours

Bezel : Black ■ White □

Baffle : Black ■ White □

Haze □ Gold ■ Chrome ■

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2018.465-ACOT-73	32W	900 mA	3667 lm	3121 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.465-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+
Trimless								
	2018.257A-ACOT-73	32W	900 mA	3667 lm	3121 lm	20°/30°/45°/55° (Lens)	3000K	90+
	2018.257A-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	20°/30°/45°/55° (Lens)	2700K-6500K	90+

Dimmable

TRIAC | 1-10V

32° Cut-off | IP44 | TUNABLE WHITE

Optional Accessory



ACSG-1
Striped glass



ACHO-2
Honeycomb louver



ACDS-6
Diffusion sheet



ACWG-1
Woven glass



ACOT-109
Suction cup

IES

20°

Adjustable

2018.465-ACOT-73
2018.257A-ACOT-73





H(m)	D(m)	E(lx)
	20°	
1.0	0.37	16417
2.0	0.74	4104
3.0	1.12	1824
4.0	1.49	1026
5.0	1.86	656

30°

Adjustable

2018.465-ACOT-73
2018.257A-ACOT-73





H(m)	D(m)	E(lx)
	30°	
1.0	0.57	10564
2.0	1.13	2641
3.0	1.70	1174
4.0	2.26	660
5.0	2.83	422

45°

Adjustable

2018.465-ACOT-73
2018.257A-ACOT-73





H(m)	D(m)	E(lx)
	45°	
1.0	0.80	6180
2.0	1.59	1545
3.0	2.39	686
4.0	3.18	386
5.0	3.98	247

55°

Adjustable

2018.465-ACOT-73
2018.257A-ACOT-73





H(m)	D(m)	E(lx)
	55°	
1.0	1.02	3740
2.0	2.04	935
3.0	3.06	415
4.0	4.09	233
5.0	5.11	149



Cut out : 128x128mm (Trim)



Cut out : 128x128mm (Trimless)

EPIC-135 Square-Wallwash

EPIC-135-STW
EPIC-135-STLW





Colours

Bezel : Black ■ White □

Baffle : Black ■

	Article number	Fixture Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim								
	2218.147-ACOT-73	32W	900 mA	3667 lm	-	Wallwash (Lens)	3000K	90+
	2218.147-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	Wallwash (Lens)	2700K-6500K	90+
Trimless								
	2218.219A-ACOT-73	32W	900 mA	3667 lm	-	Wallwash (Lens)	3000K	90+
	2218.219A-ACOT-73-WCW	29W	800 mA	2816-3190 lm	-	Wallwash (Lens)	2700K-6500K	90+



Cut out : 128x128mm (Trim)



Cut out : 128x128mm (Trimless)

Dimmable

TRIAC | 1-10V

IP44 | TUNABLE WHITE



EPIC-65



ACOT-68



ACOT-69-WCW
Tunable White



ACOT-74-15R
ACOT-74-36R
ACOT-74-50R



LN-004-15R
LN-004-36R
LN-004-50R



ACCL-3
Clear glass



ACSG-5
Striped glass

ACWG-6
Woven glass

ACDS-3
Diffusion sheet



ACHO-6
Honeycomb louver



ACOT-44D



ACOT-46D



ACOT-45D



ACOT-47D



RT-EP65-1



ST-EP65-1



RTL-EP65-1



STL-EP65-1

EPIC-85



ACOT-70A
Narrow spot



ACOT-70



ACOT-70-WCW
Tunable White



ACOT-75-10R



ACOT-75-15R
ACOT-75-36R
ACOT-75-50R



LN-008-15R
LN-008-36R
LN-008-50R



ACCL-4
Clear glass



ACSG-4
Striped glass

ACWG-5
Woven glass

ACDS-4
Diffusion sheet



ACHO-5
Honeycomb louver



ACOT-50D



ACOT-52D



ACOT-51D



ACOT-53D

ACOT-71A
engine is not suitable with wallwash baffles



ACOT-54



ACOT-55



RT-EP85-1



ST-EP85-1



RTL-EP85-1



STL-EP85-1

EPIC-110

EPIC-135

Light engine



5ZZB
GU10
IP20



5ZZA
MR16
IP20



LEE-15A
Narrow spot



LEE-15



LEE-15-DW
Dim To Warm



ACOT-72



ACOT-72-WCW
Tunable White



ACOT-73



ACOT-73-WCW
Tunable White

Lens



ACOT-76-10R



ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R



LN-001-15R
LN-001-24R
LN-001-36R
LN-001-50R



ACOT-77-15R
ACOT-77-24R
ACOT-77-36R
ACOT-77-50R



LN-009-15R
LN-009-24R
LN-009-36R
LN-009-50R

Accessories



ACCL-5
Clear glass



SG7-1
Striped glass

WG7-1
Woven glass

DS7-1
Diffusion sheet



H7-1
Honeycomb louver



ACCL-6
Clear glass



ACSG-1
Striped glass

ACWG-1
Woven glass

ACDS-6
Diffusion sheet



ACHO-2
Honeycomb louver

Baffle



ACOT-56D



ACOT-58D



ACOT-57D



ACOT-59D



ACOT-62D



ACOT-64D



ACOT-63D



ACOT-65D

ACOT-35
engine is not
suitable with
wallwash baffles



ACOT-60



ACOT-61



EP135-BRW



EP135-BSW

Trim



RT-EP110-1



ST-EP110-1



RTL-EP110-1



STL-EP110-1

RT-EP135-1

ST-EP135-1

RTL-EP135-1

STL-EP135-1