

FARFALLA SERIES (EU)

With the high-performance optical elements and elegant round downlight, the FARFALLA series is impressive for its simplicity and flexibility. Supply by changeable collars; FARFALLA elements in various colors can create an excellent atmosphere.

The FARFALLA series not only provides a comfortable illumination experience but also a stylish decoration for the interior. The space transforms with either subtle or dramatic contrasts.



Color available

● Black ● White

Custom collar colours:

● Brass ● Copper ● Satin Nickel

(MOQ is required for custom colours)




Brass



Copper



White



Satin Nickel



Black

RECESSED/ SURFACE All In One

With the ingenious mechanics, FARFALLA achieves to ensure the display effect is highlighted can produce a smooth and mild atmosphere from top to bottom. FARFALLA could adjust the application depend on different environment, it could be surface downlight if you add the collar and recessed without collar, customized color of collar is also available, high efficiency low glare and a comfortable visual experience can be precisely created.

FARFALLA
Recessed downlights



ACOT-96



ACOT-97
LEE-18 Narrow beam
ACOT-97-DW Dim to warm
ACOT-97-WCW Tunable white



ACOT-70
ACOT-70A Narrow beam
ACOT-70-DW Dim to warm
ACOT-70-WCW Tunable white

	50 Fixed	85 Fixed
Round		
Trim	 51mm	 86mm
Trim+Collar	 51mm 15mm	 86mm 23mm
Trimless	 51mm	 70mm



LEE-15
LEE-15A Narrow beam
LEE-15-DW Dim to warm



ACOT-72
ACOT-72-WCW Tunable white

110
Fixed


Round

Trim



112mm

Trim+Collar



26mm

112mm

Trimless



112mm





FARFALLA-50 Round-Fixed

FARFALLA 50-RTF
FARFALLA 50-RTL




Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐


Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
Trim						
 2318.203-ACOT-96	6.2W / 7.5W	350 mA	656 lm / 537 lm	20°/25°/40°/50° (Lens)	3000K	90+
 2318.203-LEE-18	9.5W / 13W	800 mA	774 lm / 533 lm	12° (Lens)	3000K	90+
2318.203-ACOT-97	9.1W / 12W	250 mA	913 lm / 758 lm	20°/25°/40°/50° (Lens)	3000K	90+
2318.203-ACOT-97-DW	10W / -	250 mA	14-611 lm / -	20°/25°/40°/50° (Lens)	1800-3000K	90+
2318.203-ACOT-97-WCW	9W / -	250 mA	870-1040 lm / -	20°/25°/40°/50° (Lens)	2700-6500K	90+
Trimless						
 2318.203F-ACOT-96	6.2W / 7.5W	350 mA	656 lm / 538 lm	20°/25°/40°/50° (Lens)	3000K	90+
 2318.203F-LEE-18	9.5W / 13W	800 mA	774 lm / 533 lm	12° (Lens)	3000K	90+
2318.203F-ACOT-97	9.1W / 12W	250 mA	913 lm / 758 lm	20°/25°/40°/50° (Lens)	3000K	90+
2318.203F-ACOT-97-DW	10W / -	250 mA	14-611 lm / -	20°/25°/40°/50° (Lens)	1800-3000K	90+
2318.203F-ACOT-97-WCW	9W / -	250 mA	870-1040 lm / -	20°/25°/40°/50° (Lens)	2700-6500K	90+

Dimmable




Optional Accessory







⊖ Cut out : 45mm (Trim)



⊖ Cut out : 45mm (Trim)



⊖ Cut out : 60mm (Trimless)





⊖ Cut out : 60mm (Trimless)

IES



Fixed UGR<19

2318.203-ACOT-96
2318.203F-ACOT-96





H(m)	D(m)	E(lx)
20°		
1.0	0.33	3307
2.0	0.66	826
3.0	0.99	367
4.0	1.32	206
5.0	1.65	132



Fixed UGR<16

2318.203-ACOT-96
2318.203F-ACOT-96





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2439
2.0	0.94	609
3.0	1.41	271
4.0	1.88	152
5.0	2.35	97



Fixed UGR<19

2318.203-ACOT-96
2318.203F-ACOT-96





H(m)	D(m)	E(lx)
40°		
1.0	0.72	1145
2.0	1.43	286
3.0	2.15	127
4.0	2.87	71
5.0	3.59	45



Fixed UGR<22

2318.203-ACOT-96
2318.203F-ACOT-96





H(m)	D(m)	E(lx)
50°		
1.0	1.03	678
2.0	2.07	169
3.0	3.10	75
4.0	4.14	42
5.0	5.17	27



Fixed UGR<19

2318.203-ACOT-97
2318.203F-ACOT-97





H(m)	D(m)	E(lx)
20°		
1.0	0.34	3232
2.0	0.68	808
3.0	1.02	359
4.0	1.35	202
5.0	1.69	129



Fixed UGR<16

2318.203-ACOT-97
2318.203F-ACOT-97





H(m)	D(m)	E(lx)
25°		
1.0	0.49	2315
2.0	0.97	578
3.0	1.46	257
4.0	1.95	144
5.0	2.44	92



Fixed UGR<19

2318.203-ACOT-97
2318.203F-ACOT-97





H(m)	D(m)	E(lx)
40°		
1.0	0.73	1033
2.0	1.46	258
3.0	2.20	114
4.0	2.93	64
5.0	3.66	41



Fixed UGR<22

2318.203-ACOT-97
2318.203F-ACOT-97



H(m)	D(m)	E(lx)
50°		
1.0	1.00	651
2.0	2.01	162
3.0	3.02	72
4.0	4.03	20
5.0	5.03	26

FARFALLA-85 Round-Fixed

FARFALLA 85-RTF
FARFALLA 85-RTL





Colours

Bezel : Black ☒ White ☐

Baffle : Black ☒ White ☐


Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
Trim						
 2418.209-ACOT-70A	9.5W / -	800 mA	774 lm / -	10° (Lens)	3000K	90+
2418.209-ACOT-70	11.8W / -	350 mA	1446 lm / -	25°/35°/45°/55° (Lens)	3000K	90+
2418.209-ACOT-70-DW	12.3W / -	350 mA	33-1228 lm / -	25°/35°/45°/55° (Lens)	1800-3000K	90+
2418.209-ACOT-70-WCW	13W / -	350 mA	1143-1356 lm / -	25°/35°/45°/55° (Lens)	2700-6500K	90+
Trimless						
 2418.210F-ACOT-70A	9.5W / -	800 mA	774 lm / -	10° (Lens)	3000K	90+
2418.210F-ACOT-70	11.8W / -	350 mA	1446 lm / -	25°/35°/45°/55° (Lens)	3000K	90+
2418.210F-ACOT-70-DW	12.3W / 15W	350 mA	33-1228 lm / -812	25°/35°/45°/55° (Lens)	1800-3000K	90+
2418.210F-ACOT-70-WCW	13W / -	350 mA	1143-1356 lm / -	25°/35°/45°/55° (Lens)	2700-6500K	90+



Dimmable



Optional Accessory

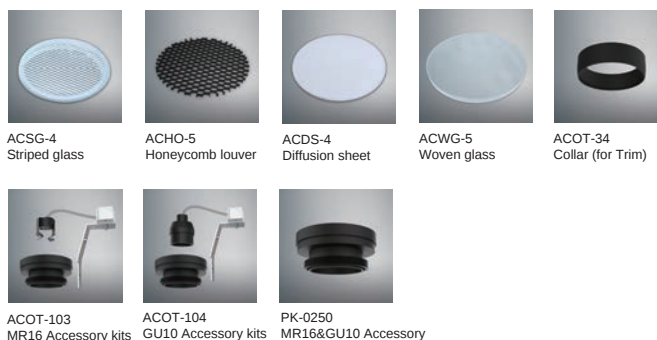



FARFALLA-110 Round-Fixed

FARFALLA 110-RTF
FARFALLA 110-RTLF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐





Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
Trim						
 2318.223-LEE-15A	12.9W / -	350 mA	1182 lm / -	10°(Lens)	3000K	90+
2318.223-LEE-15	17W / 20W	500 mA	2004 lm / 1599 lm	20°/30°/45°/55° (Lens)	3000K	90+
2318.223-LEE-15-DW	15.8W / 18W	450 mA	33-1582 lm / 1109 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
 2318.223-ACOT-72	24.8W / -	700 mA	2873 lm / -	15°/24°/36°/50° (Lens)	3000K	90+
2318.223-ACOT-72-WCW	22W / -	600 mA	2086-2304 lm / -	15°/24°/36°/50° (Lens)	2700-6500K	90+
Trimless						
 2318.223F-LEE-15A	12.9W / -	350 mA	1182 lm / -	10°(Lens)	3000K	90+
2318.223F-LEE-15	17W / 20W	500 mA	2004 lm / 1599 lm	20°/30°/45°/55° (Lens)	3000K	90+
2318.223F-LEE-15-DW	15.8W / 18W	450 mA	33-1582 lm / 1109 lm	20°/25°/40°/50° (Lens)	1800-3000K	90+
 2318.223F-ACOT-72	24.8W /	700 mA	2873 lm / -	15°/24°/36°/50° (Lens)	3000K	90+
2318.223F-ACOT-72-WCW	22W / -	600 mA	2086-2304 lm / -	15°/24°/36°/50° (Lens)	2700-6500K	90+

Dimmable



Optional Accessory







IES



Fixed UGR<10

2318.223-LEE-15
2318.223F-LEE-15
2318.224F-LEE-15





H(m)	D(m)	E(lx)
20°		
1.0	0.38	8453
2.0	0.76	2113
3.0	1.14	939
4.0	1.52	528
5.0	1.90	338



Fixed UGR<10

2318.223-LEE-15
2318.223F-LEE-15





H(m)	D(m)	E(lx)
30°		
1.0	0.59	5167
2.0	1.17	1292
3.0	1.76	574
4.0	2.34	323
5.0	2.93	206



Fixed UGR<10

2318.223-LEE-15
2318.223F-LEE-15





H(m)	D(m)	E(lx)
45°		
1.0	0.72	3070
2.0	1.43	2767
3.0	2.15	341
4.0	2.87	191
5.0	3.59	122



Fixed UGR<13

2318.223-LEE-15
2318.223F-LEE-15





H(m)	D(m)	E(lx)
55°		
1.0	1.00	2035
2.0	2.01	508
3.0	3.01	226
4.0	4.01	127
5.0	5.01	81



Fixed UGR<10

2318.223-LEE-15-DW
2318.223F-LEE-15-DW





H(m)	D(m)	E(lx)
20°		
1.0	0.37	4113
2.0	0.73	1028
3.0	1.10	457
4.0	1.46	257
5.0	1.83	164



Fixed UGR<10

2318.223-LEE-15-DW
2318.223F-LEE-15-DW





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2726
2.0	0.94	681
3.0	1.41	302
4.0	1.88	170
5.0	2.35	109



Fixed UGR<10

2318.223-LEE-15-DW
2318.223F-LEE-15-DW





H(m)	D(m)	E(lx)
40°		
1.0	0.74	1487
2.0	1.47	371
3.0	2.21	165
4.0	2.94	92
5.0	3.68	59



Fixed UGR<16

2318.223-LEE-15-DW
2318.223F-LEE-15-DW



H(m)	D(m)	E(lx)
50°		
1.0	0.87	782
2.0	1.78	195
3.0	2.66	86
4.0	3.55	48
5.0	4.44	31