


GAGA SERIES (EU)

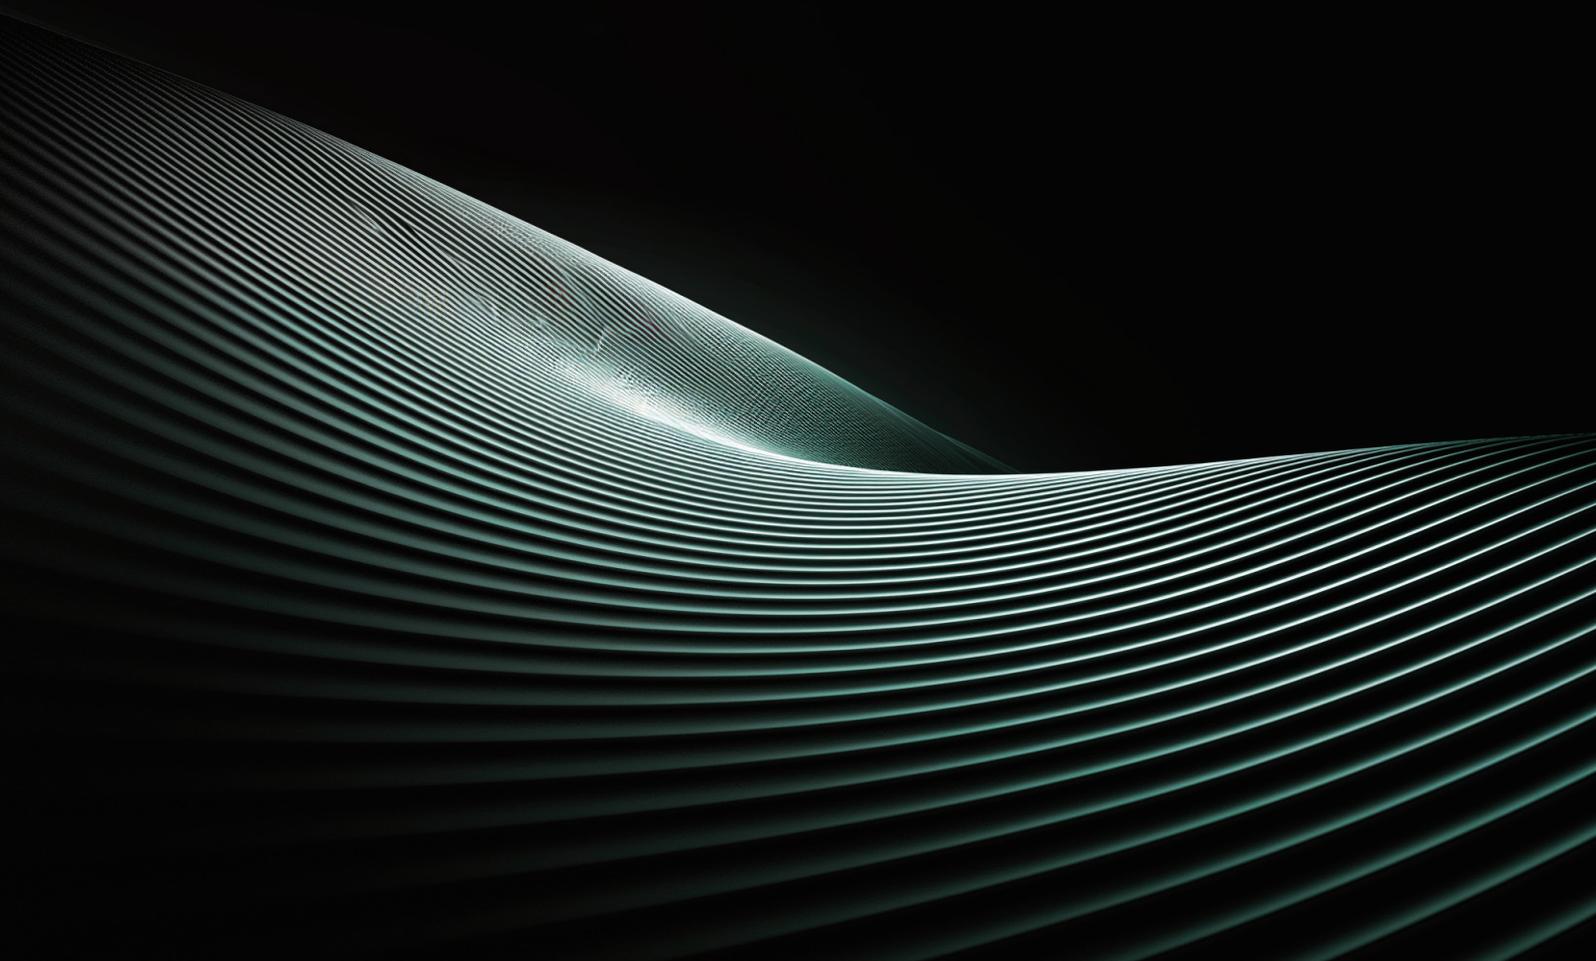

GAGA (EU)

The GAGA series is a fixture designed with a removable light engine. The light engine can be assembled / disassembled by twisting the light engine. The tool-free fraction is convenient for fixed type and adjustable trim accessory are its advantage. GAGA is also designed with IP rated. UGR <19.

Accessories include honeycomb, strip glass, a diffusion sheet, clear glass.

Parts can be bought separately for easy stocking purposes.

Suitable in the shopping mall, shop, hotel corridor, guest room, bathroom, etc.

Reflector

Lens
Low Glare baffle

GAGA-S



7W
Fixed/Adjustable



9W
Fixed/Adjustable

GAGA
(Light engine)



14W
Fixed/Adjustable



14W
Fixed/Adjustable



LEE-21
6° Ultra narrow beam
10W Heatsink



LEE-16
14W Heatsink



LEE-21-WCW
Tunable White
9W Heatsink



LEE-21-DW
Dim to warm
12W Heatsink



ACOT-37
18W Heatsink

Exchangeable light engine
CRI 90
2700 or 3000 or 4000 Kelvin
Aluminum die cast



Lens
For LEE-16 or ACOT-37
ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R

For LEE-21-WCW or LEE-21-DW
ACOE-1 (13R)
ACOE-3 (31R)



Accessories
SG7-1 Striped glass
WG7-1 Woven glass
DS7-1 Diffusion sheet
H7-1 Honeycomb louver




Reflector
For LEE-16R or ACOT-37R
ACOT-100-15R
ACOT-100-24R
ACOT-100-36R
ACOT-100-50R



Baffle
ACBF-1
Colours :   
Black White Gold

Round



Material
Aluminum die cast



Trimless

For a minimalist design, RISE also offers a trimless design that allows the luminaire to sit flush with the ceiling.



RTL-GA-1



Baffle colour


GAGA provide available in many different colour variations to complement custom designs and colour concepts. The select housing colours (white, black) combine beautifully with white, black, or gold baffle, delivering a harmonious, high-quality overall design.

Color available - A



Reflector

Combining the optical effects of a lens and a reflector, it has a metallic texture, excellent the anti-glare effect, and the light control of a lens to ensure an even light pattern.

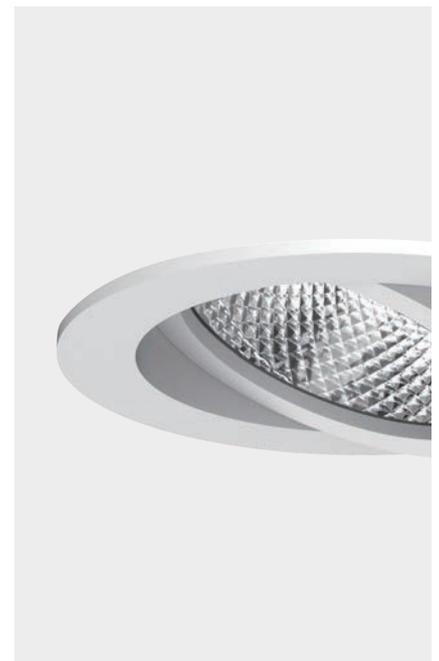





MESF™
THECU
ONINGO
OTIDCNIC
EPM 3ATE.



GAGA-S ▶

Round | Fixed
Adjustable



Colours

Bezel : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2218.145	7W	350 mA	530 lm	544 lm	15°/24°/36°/50°(Reflector)	3000K	90+



Dimmable



IES





Fixed UGR<19
2218.145

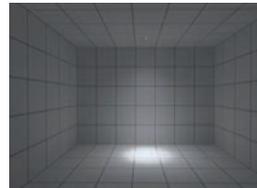

H(m)	D(m)	E(lx)
15°		
1.0	0.24	4178
2.0	0.48	1045
3.0	0.72	464
4.0	0.96	261
5.0	1.20	167





Fixed UGR<19
2218.145

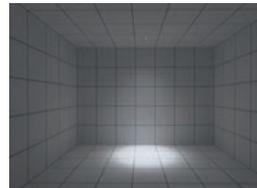

H(m)	D(m)	E(lx)
24°		
1.0	0.43	2431
2.0	0.85	607
3.0	1.28	270
4.0	1.70	151
5.0	2.13	97





Fixed UGR<22
2218.145

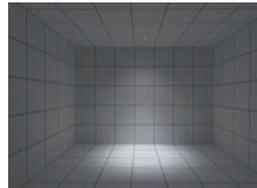

H(m)	D(m)	E(lx)
36°		
1.0	0.63	1401
2.0	1.25	350
3.0	1.88	155
4.0	2.50	87
5.0	3.13	56



Fixed UGR<25
2218.145

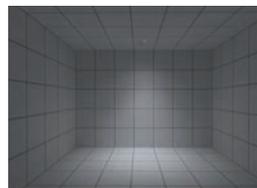

H(m)	D(m)	E(lx)
50°		
1.0	0.89	707
2.0	1.77	177
3.0	2.66	78
4.0	3.55	44
5.0	4.44	28



⊕ Cut out : 70mm (Trim)



Colours

Bezel : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2118.580	7W	350 mA	530 lm	544 lm	15°/24°/36°/50°(Reflector)	3000K	90+



Dimmable



IES





Adjustable
2118.580

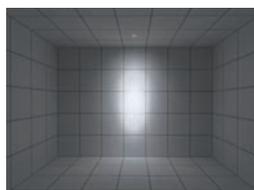

H(m)	D(m)	E(lx)
15°		
1.0	0.24	4141
2.0	0.49	1035
3.0	0.73	460
4.0	0.98	258
5.0	1.22	165





Adjustable
2118.580

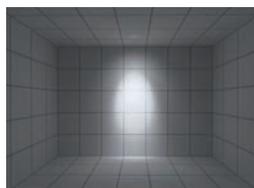

H(m)	D(m)	E(lx)
24°		
1.0	0.43	2431
2.0	0.85	607
3.0	1.28	270
4.0	1.70	151
5.0	2.13	97





Adjustable
2118.580

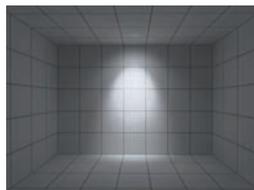


H(m)	D(m)	E(lx)
36°		
1.0	0.63	1401
2.0	1.25	350
3.0	1.88	155
4.0	2.50	87
5.0	3.13	56



Adjustable
2118.580

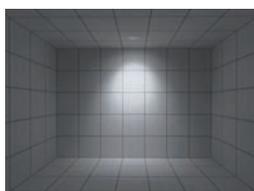

H(m)	D(m)	E(lx)
50°		
1.0	0.89	707
2.0	1.77	177
3.0	2.66	78
4.0	3.55	44
5.0	4.44	28

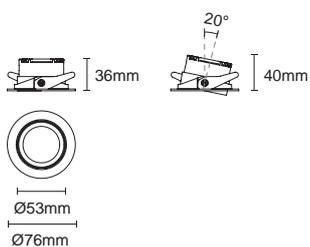

Ⓢ Cut out : 70mm (Trim)

GAGA-S Round-Fixed

GAGA-SF
GAGA-SF-TRIMLESS




Colours


Bezel : Black White

Baffle : Black White Gold

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
1618.116	9W	250 mA	1036 lm	536 lm	20°/40° (Lens)	3000K	90+
Trimless							
1818.243	9W	250 mA	1036 lm	536 lm	20°/40° (Lens)	3000K	90+



Ⓜ Cut out : 70mm (Trim)

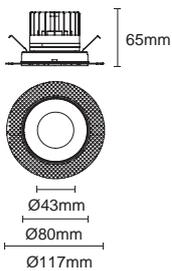

Ⓜ Cut out : 85mm (Trimless)

Dimmable





IES



Fixed UGR<19

1618.116
1818.243


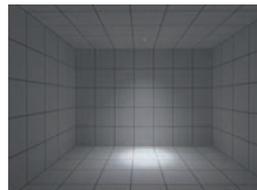


H(m)	D(m)	E(lx)
20°		
1.0	0.33	2834
2.0	0.65	708
3.0	0.98	314
4.0	1.30	177
5.0	1.63	113



Fixed UGR<22

1618.116
1818.243

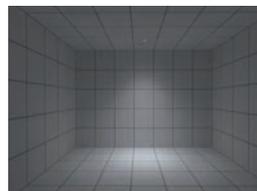

H(m)	D(m)	E(lx)
40°		
1.0	0.69	783
2.0	1.39	195
3.0	2.08	87
4.0	2.78	48
5.0	3.47	31

GAGA-S Round-Adjustable

GAGA-SW
GAGA-SW-TRIMLESS




Colours


Bezel : Black White

Baffle : Black White Gold

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
1618.117	9W	250 mA	1036 lm	536 lm	20°/40° (Lens)	3000K	90+
Trimless							
1818.244	9W	250 mA	1036 lm	536 lm	20°/40° (Lens)	3000K	90+

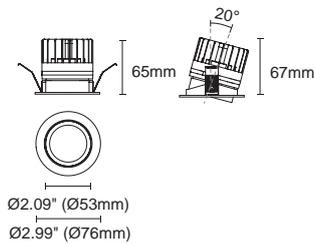

⊖ Cut out : 70mm (Trim)

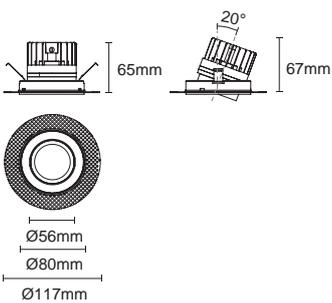

⊖ Cut out : 85mm (Trimless)

Dimmable





IES



Adjustable

1618.117
1818.244


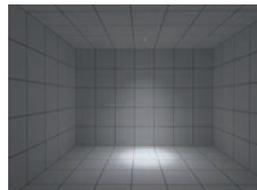


H(m)	D(m)	E(lx)
20°		
1.0	0.33	2834
2.0	0.65	708
3.0	0.98	314
4.0	1.30	177
5.0	1.63	113



Adjustable

1618.117
1818.244

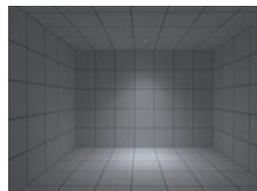

H(m)	D(m)	E(lx)
40°		
1.0	0.69	783
2.0	1.39	195
3.0	2.08	87
4.0	2.78	48
5.0	3.47	31



GAGA

Round | Fixed
Adjustable



Colours

Bezel : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2118.578-LEE-16R	14W	350 mA	1193 lm	895 lm	15°/24°/36°/50°(Reflector)	3000K	90+

Dimmable



Optional Accessory





SG7-1 Striped glass H7-1 Honeycomb louver DS7-1 Diffusion sheet WG7-1 Woven glass

IES





Fixed UGR<19
2118.578-LEE-16R

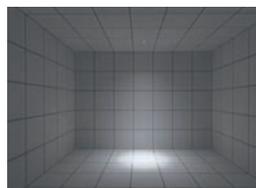

H(m)	D(m)	E(lx)
15°		
1.0	0.25	6587
2.0	0.50	1647
3.0	0.75	731
4.0	1.01	411
5.0	1.26	263





Fixed UGR<19
2118.578-LEE-16R

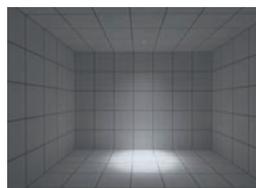

H(m)	D(m)	E(lx)
24°		
1.0	0.45	3633
2.0	0.91	908
3.0	1.36	403
4.0	1.81	227
5.0	2.27	145





Fixed UGR<22
2118.578-LEE-16R

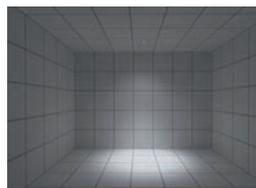

H(m)	D(m)	E(lx)
36°		
1.0	0.68	2101
2.0	1.35	525
3.0	2.03	233
4.0	2.70	131
5.0	3.38	84



Fixed UGR<25
2118.578-LEE-16R

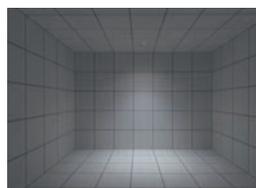

H(m)	D(m)	E(lx)
50°		
1.0	0.91	1103
2.0	1.81	275
3.0	2.72	122
4.0	3.63	68
5.0	4.53	44



ⓐ Cut out : 70mm (Trim)



Colours


Bezel : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2118.579-LEE-16R	14W	350 mA	1193 lm	895 lm	15°/24°/36°/50°(Reflector)	3000K	90+

Dimmable



Optional Accessory


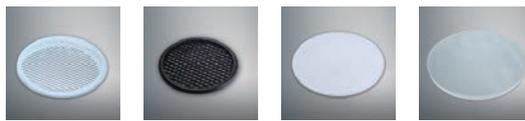


SG7-1 Striped glass H7-1 Honeycomb louver DS7-1 Diffusion sheet WG7-1 Woven glass

IES





Adjustable
2118.579-LEE-16R

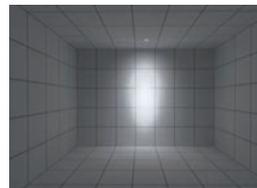

H(m)	D(m)	E(lx)
15°		
1.0	0.25	6587
2.0	0.50	1647
3.0	0.75	731
4.0	1.01	411
5.0	1.26	263





Adjustable
2118.579-LEE-16R

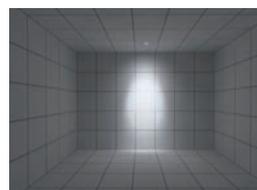

H(m)	D(m)	E(lx)
24°		
1.0	0.45	3633
2.0	0.91	908
3.0	1.36	403
4.0	1.81	227
5.0	2.27	145





Adjustable
2118.579-LEE-16R

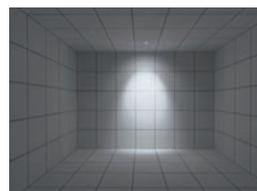


H(m)	D(m)	E(lx)
36°		
1.0	0.68	2101
2.0	1.35	525
3.0	2.03	233
4.0	2.70	131
5.0	3.38	84



Adjustable
2118.579-LEE-16R

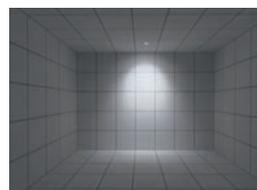

H(m)	D(m)	E(lx)
50°		
1.0	0.91	1103
2.0	1.81	275
3.0	2.72	122
4.0	3.63	68
5.0	4.53	44

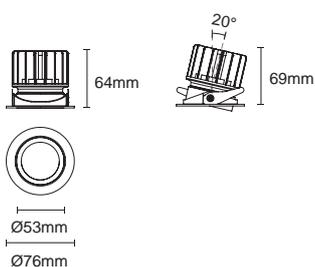

Ⓞ Cut out : 70mm (Trim)

GAGA Round-Fixed

GAGA-75-RTF2
GAGA-75-RTLF2



Colours

Bezel: Black White

Baffle: Black White Gold

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2118.573-LEE-21	10W	800 mA	774 lm	453 lm	7° (Lens)	3000K	90+
2118.573-LEE-16	14W	350 mA	1193 lm	946 lm	15°/24°/36°/50° (Lens)	3000K	90+
2118.573-LEE-21-WCW	9W	250 mA	866-1047 lm	- lm	13°/31° (Lens)	2700-6500K	90+
2118.573-LEE-21-DW	12W	350 mA	36-1265 lm	- lm	13°/31° (Lens)	1800-3000K	90+
2118.573-ACOT-37	18W	500 mA	2140 lm	- lm	15°/24°/36°/50° (Lens)	3000K	90+
Trimless							
2118.661-LEE-21	10W	800 mA	774 lm	453 lm	7° (Lens)	3000K	90+
2118.661-LEE-16	14W	350 mA	1193 lm	946 lm	15°/24°/36°/50° (Lens)	3000K	90+
2118.661-LEE-21-WCW	9W	250 mA	866-1047 lm	-	13°/31° (Lens)	2700-6500K	90+
2118.661-LEE-21-DW	12W	350 mA	36-1265 lm	-	13°/31° (Lens)	1800-3000K	90+
2118.661-ACOT-37	18W	500 mA	2140 lm	-	15°/24°/36°/50° (Lens)	3000K	90+

Dimmable



Optional Accessory



SG7-1
Striped glass




H7-1
Honeycomb louver




DS7-1
Diffusion sheet



WG7-1
Woven glass



Ⓜ Cut out : 70mm (Trim)

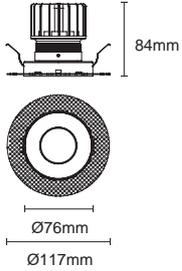



Ⓜ Cut out : 85mm (Trimless)

IES



Fixed UGR<10

2118.573-LEE-21
2118.661-LEE-21


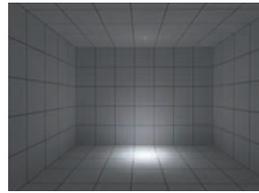


H(m)	D(m)	E(lx)
7°		
1.0	0.13	14998
2.0	0.25	3750
3.0	0.38	1666
4.0	0.50	937
5.0	0.63	599



Fixed UGR<10

2118.573-LEE-16
2118.661-LEE-16


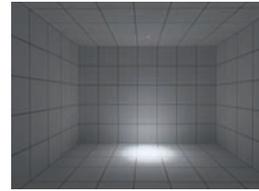


H(m)	D(m)	E(lx)
15°		
1.0	0.23	11568
2.0	0.47	2892
3.0	0.70	1285
4.0	0.94	723
5.0	1.17	462



Fixed UGR<10

2118.573-LEE-16
2118.661-LEE-16


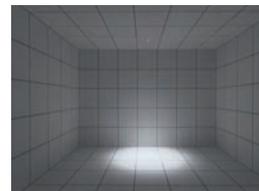


H(m)	D(m)	E(lx)
24°		
1.0	0.47	4541
2.0	0.94	1135
3.0	1.40	504
4.0	1.87	283
5.0	2.34	181



Fixed UGR<13

2118.573-LEE-16
2118.661-LEE-16


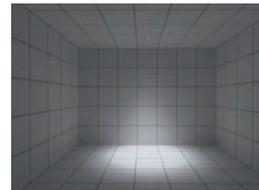


H(m)	D(m)	E(lx)
36°		
1.0	0.67	2461
2.0	1.33	615
3.0	2.00	273
4.0	2.66	153
5.0	3.33	98



Fixed UGR<19

2118.573-LEE-16
2118.661-LEE-16

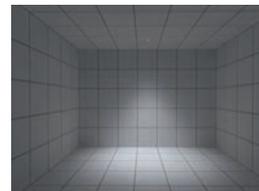

H(m)	D(m)	E(lx)
50°		
1.0	0.91	1493
2.0	1.82	373
3.0	2.73	165
4.0	3.64	93
5.0	4.55	59

GAGA Round-Adjustable

GAGA-75-RTA2
GAGA-75-RTLA2



Colours

Bezel: Black White

Baffle: Black White Gold

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2118.574-LEE-21	10W	800 mA	774 lm	453 lm	7° (Lens)	3000K	90+
2118.574-LEE-16	14W	350 mA	1193 lm	946 lm	15°/24°/36°/50° (Lens)	3000K	90+
2118.574-LEE-21-WCW	9W	250 mA	866-1047 lm	-	13°/31° (Lens)	2700-6500K	90+
2118.574-LEE-21-DW	12W	350 mA	36-1265 lm	-	13°/31° (Lens)	1800-3000K	90+
2118.574-ACOT-37	18W	500 mA	2140 lm	-	15°/24°/36°/50° (Lens)	3000K	90+
Trimless							
2118.662-LEE-21	10W	800 mA	774 lm	453 lm	7° (Lens)	3000K	90+
2118.662-LEE-16	14W	350 mA	1193 lm	946 lm	15°/24°/36°/50° (Lens)	3000K	90+
2118.662-LEE-21-WCW	9W	250 mA	866-1047 lm	-	13°/31° (Lens)	2700-6500K	90+
2118.662-LEE-21-DW	12W	350 mA	36-1265 lm	-	13°/31° (Lens)	800-3000K	90+
2118.662-ACOT-37	18W	500 mA	2140 lm	-	15°/24°/36°/50° (Lens)	3000K	90+

Dimmable



Optional Accessory




SG7-1
Striped glass

H7-1
Honeycomb louver

DS7-1
Diffusion sheet

WG7-1
Woven glass



IES

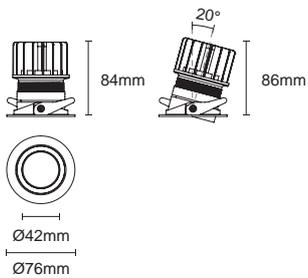


Cut out : 70mm (Trim)



Adjustable
2118.574-LEE-21
2118.662-LEE-21

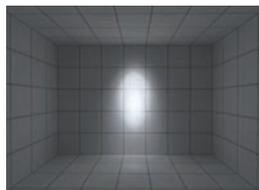



H(m)	D(m)	E(lx)
7°		
1.0	0.13	14998
2.0	0.25	3750
3.0	0.38	1666
4.0	0.50	937
5.0	0.63	599

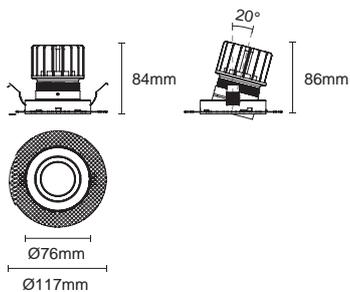

Cut out : 85mm (Trimless)





Adjustable
2118.574-LEE-16
2118.662-LEE-16

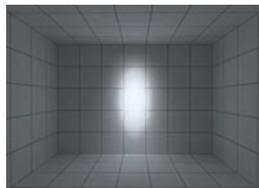

H(m)	D(m)	E(lx)
15°		
1.0	0.23	11568
2.0	0.47	2892
3.0	0.70	1285
4.0	0.94	723
5.0	1.17	462





Adjustable
2118.573-LEE-16
2118.661-LEE-16

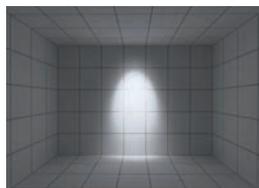

H(m)	D(m)	E(lx)
24°		
1.0	0.47	4541
2.0	0.94	1135
3.0	1.40	504
4.0	1.87	283
5.0	2.34	181





Adjustable
2118.573-LEE-16
2118.661-LEE-16

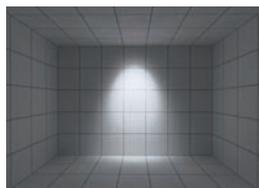

H(m)	D(m)	E(lx)
36°		
1.0	0.67	2461
2.0	1.33	615
3.0	2.00	273
4.0	2.66	153
5.0	3.33	98



Adjustable
2118.573-LEE-16
2118.661-LEE-16

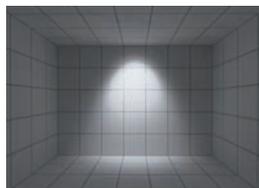

H(m)	D(m)	E(lx)
50°		
1.0	0.91	1493
2.0	1.82	373
3.0	2.73	165
4.0	3.64	93
5.0	4.55	59