NET-III SERIES (EU)

NET-III (EU)

NET-III is a structural system designed to have an overall appearance inflow line style to integrate into the architecture. The system concept is user-friendly to adjust the angle easily in all kinds of different directions and simple installation to mount direct and indirect light.
This series is suitable for showrooms, shops, boutiques & restaurants.

Color available - A

Black White

B

Black White

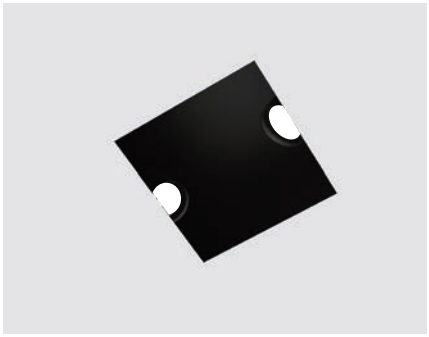

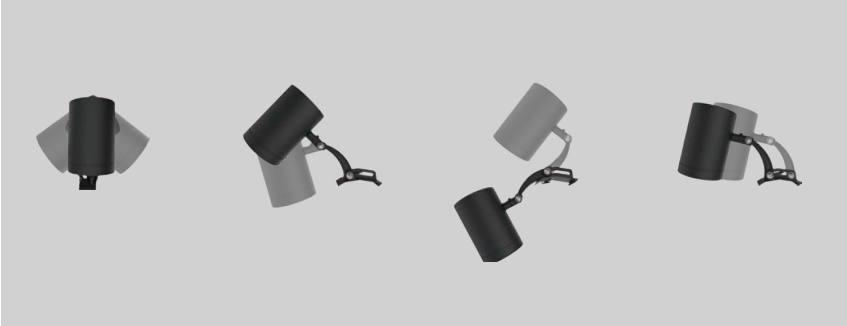

Four ways to rotate and adjust

By uses multi-node mechanical arm, NET-III can easily adjust its housing for diversity mobility. Either hiding in the ceiling as main illumination or show up as spot light to highlight products.

Diversification

Even whole fixture is completed hidden inside the ceiling, light still find its way out.

Fixture installation schematic diagram



Single channel recessed slot



Dual channel recessed slot



Recessed wall wash / grazer

NET III Driver

Standard tracking system (3 circuits 4 wires or 1 circuit 3 wires) can be used as power source to save labor & installation.
Luminaires are equipped with slim linear driver adapter to minimize the size, easy to shift position in the cove
It is recommended to paint the interior in black.

3 circuits 4 wires track
1 circuit 3 wires track

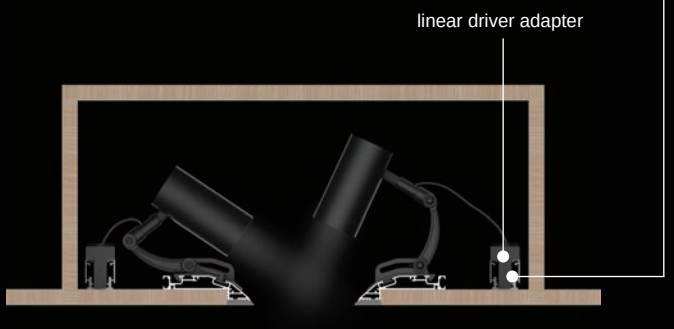

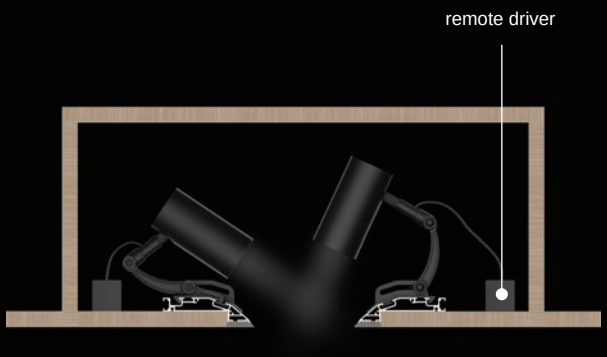

Assembling diagram

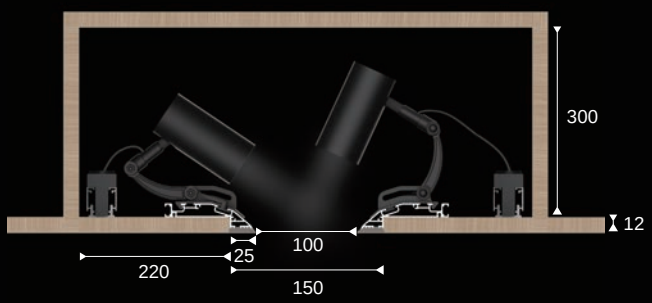

NET-III 64

Colours

Body : Black ■ White □

Baffle : Black ■ White □

Type	Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2319.228	12W	AC 220-240V	350 mA	1454 lm	1342 lm	20°/25°/38°/50°(Lens)	3000K	90+
	2319.227	25W	AC 220-240V	700 mA	2681 lm	2416 lm	20°/25°/38°/50°(Lens)	3000K	90+





Optional Accessory

S-001
Long snoot

S-002
Asymmetrical snoot

SG-001
Striped glass



H-001
Honeycomb louver

B-002
Barndoor

20°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	20°	
1.0	0.34	7449
2.0	0.69	1862
3.0	1.03	827
4.0	1.37	465
5.0	1.72	298

25°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	25°	
1.0	0.42	6371
2.0	0.84	1593
3.0	1.26	707
4.0	1.68	398
5.0	2.10	254

38°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	38°	
1.0	0.70	3175
2.0	1.39	793
3.0	2.09	352
4.0	2.78	198
5.0	3.48	127

50°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	50°	
1.0	0.92	1886
2.0	1.84	471
3.0	2.77	209
4.0	3.69	117
5.0	4.61	75

20°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	20°	
1.0	0.34	17073
2.0	0.67	4268
3.0	1.01	1897
4.0	1.34	1067
5.0	1.68	682

25°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	25°	
1.0	0.43	11629
2.0	0.86	2907
3.0	1.28	1292
4.0	1.71	726
5.0	2.14	465

38°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	38°	
1.0	0.71	5385
2.0	1.42	1346
3.0	2.14	598
4.0	2.85	336
5.0	3.56	215

50°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	50°	
1.0	0.94	3311
2.0	1.89	827
3.0	2.83	367
4.0	3.78	206
5.0	4.72	132

RW-920
Type: Track
Colours ● Black ○ White



RW-U10
Type: Track
Colours ● Black ○ White





RW-O39
Type: Track
Colours ● Black ○ White





RW-_____
Type: Track
Colours ● Black ○ White

OEM length are welcome
Please contact with our sales rep.
for more info.



MAGNET

This product features an added magnetic structure, allowing for easy installation on a steel plate without the need for additional mounting rails.
The straightforward installation not only saves time but also enhances user convenience.

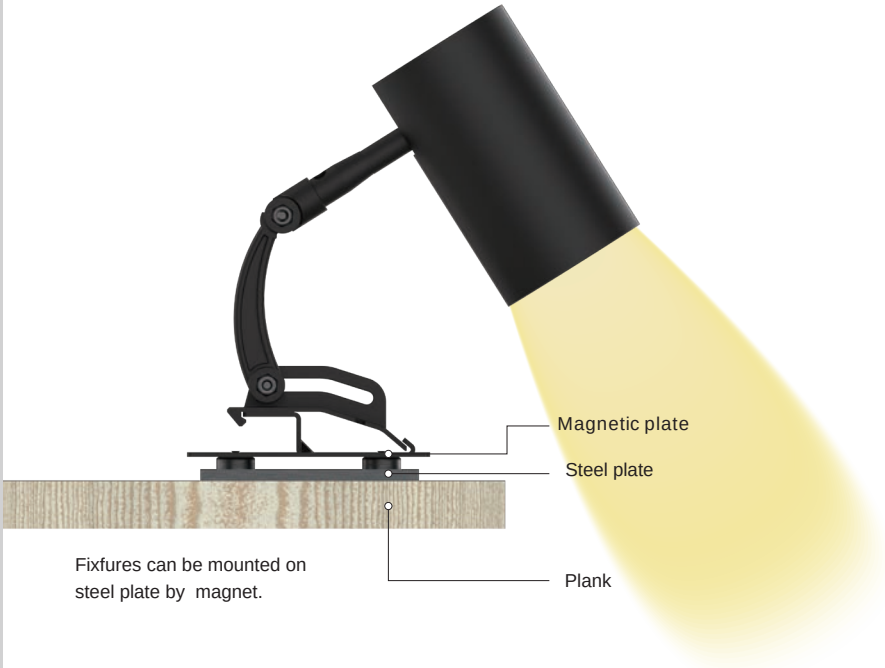

Fixfures can be mounted on steel plate by magnet.

Assembling diagram

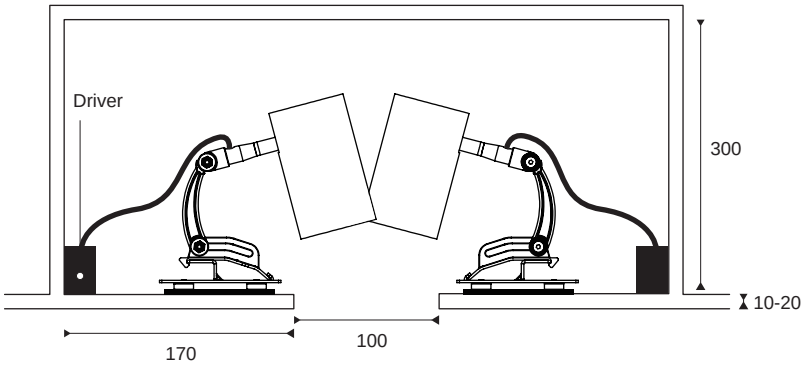

NET-III 64 Magnet

NET-III-64M-RSP

Colours

Body : Black ■ White □

Baffle : Black ■ White □

Type	Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
	2319.230	12W	AC 220-240V	350 mA	1454 lm	1342 lm	20°/25°/38°/50°(Lens)	3000K	90+
	2319.229	25W	AC 220-240V	700 mA	2681 lm	2416 lm	20°/25°/38°/50°(Lens)	3000K	90+





Optional Accessory

S-001
Long snoot

S-002
Asymmetrical snoot

SG-001
Striped glass



H-001
Honeycomb louver

B-002
Barndoor

20°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	20°	
1.0	0.34	7449
2.0	0.69	1862
3.0	1.03	827
4.0	1.37	465
5.0	1.72	298

25°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	25°	
1.0	0.42	6371
2.0	0.84	1593
3.0	1.26	707
4.0	1.68	398
5.0	2.10	254

38°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	38°	
1.0	0.70	3175
2.0	1.39	793
3.0	2.09	352
4.0	2.78	198
5.0	3.48	127

50°

Spotlight

2319.228





H(m)	D(m)	E(lx)
	50°	
1.0	0.92	1886
2.0	1.84	471
3.0	2.77	209
4.0	3.69	117
5.0	4.61	75

20°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	20°	
1.0	0.34	17073
2.0	0.67	4268
3.0	1.01	1897
4.0	1.34	1067
5.0	1.68	682

25°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	25°	
1.0	0.43	11629
2.0	0.86	2907
3.0	1.28	1292
4.0	1.71	726
5.0	2.14	465

38°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	38°	
1.0	0.71	5385
2.0	1.42	1346
3.0	2.14	598
4.0	2.85	336
5.0	3.56	215

50°

Spotlight

2319.227





H(m)	D(m)	E(lx)
	50°	
1.0	0.94	3311
2.0	1.89	827
3.0	2.83	367
4.0	3.78	206
5.0	4.72	132