


SHELL SERIES (EU)




SHELL (EU)

With the ingenious mechanics, optimized thermal management, and multiple free-form surface reflectors, SHELL brings a new picture to display lighting solutions. The wall wash system creates a glowing transition between wall and ceiling, and avoids stripes and shadows across the wall, offering a harmonious visual experience.

SHELL-T

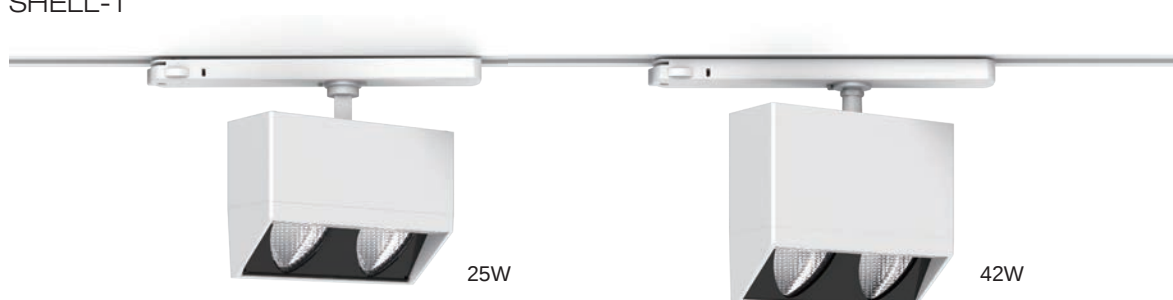

SHELL-D

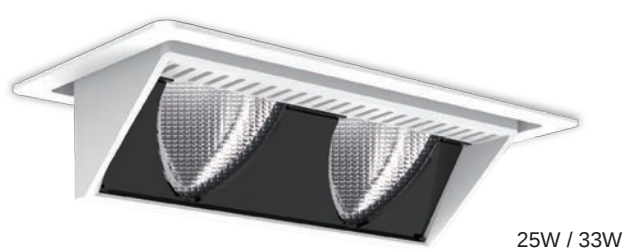




The SHELL light is available in three variants with different beam characteristics to suit different space layouts and requirements. Perfect alignment ensures that as much light as possible is directed at the product with the minimum of luminaires. SHELL lights can be adapted to a variety of conditions and illuminated selectively without loss of light dispersion. As a result, all products are presented in an attractive manner, regardless of the size of the shop or the interior design.





Shelf floor wallwash

Suggested height to ceiling:300cm
Distance between fixtures:150cm
Distance from wall:100cm




X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.5 : 2 m (Low)

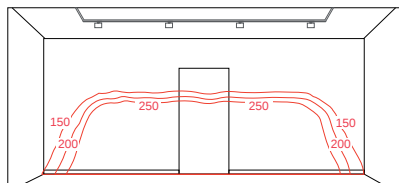




High ceiling wallwash

Suggested height to ceiling:500cm
Distance between fixtures:1.20cm
Distance from wall:100cm




X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.2 : 5 m

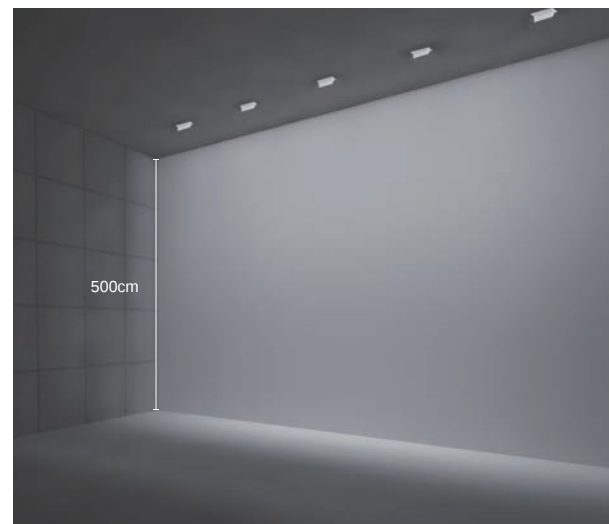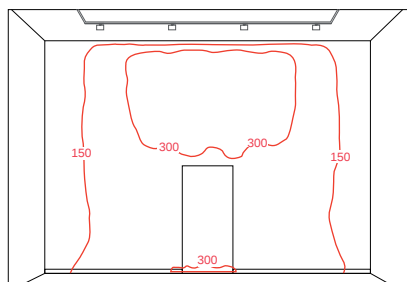



Wide wallwash

Suggested height to ceiling:300cm
Distance between fixtures:200cm
Distance from wall:100cm



X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 2 : 3 m

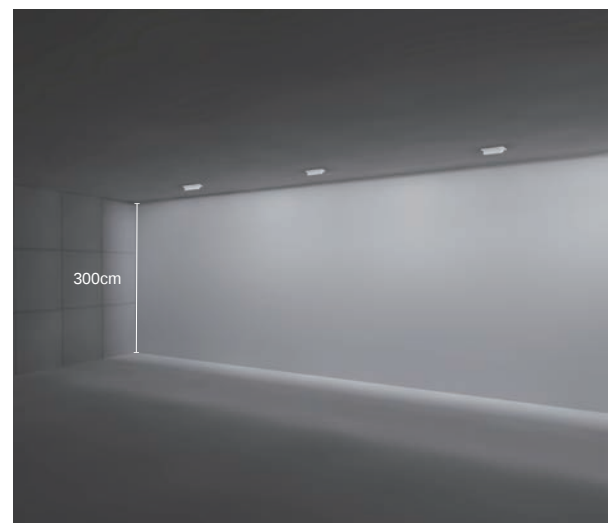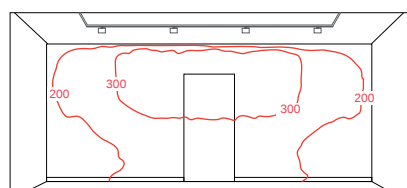





With special designed reflector, allowing the fixture to evenly light up 3 meters height wall.

SHELL-T Track lights
Wallwash



▲ Another type of reflector allowing fixture to evenly light up 5 meters wall.

The Wall wash light can be used for ► green beautification of the planting wall display, large area of light to maintain the beautiful growth of indoor plants.



SHELL-T

SHELL-T-SF1
SHELL-T-HC1
SHELL-T-W1



Colours

Body : Black ☒ White ☐

Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2219.200	25W	220-240VAC	700 mA	2670 lm	2116 lm	Wallwash (Reflector)	3000K	90+
						Shelf floor wallwash	   	IP20
2219.200A	25W	220-240VAC	700 mA	2670 lm	2207 lm	Wallwash (Reflector)	1800-3000K	90+
						High ceiling wallwash	   	IP20
2219.200B	25W	220-240VAC	700 mA	2670 lm	2010 lm	Wallwash (Reflector)	3000K	90+
						Wide wallwash	   	IP20

Dimmable



Driver Built-in


IES



Wallwash

Shelf floor wallwash

2219.200

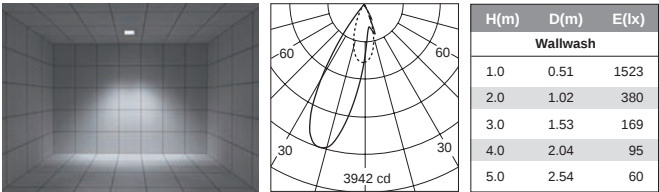




Wallwash

High ceiling wallwash

2219.200A


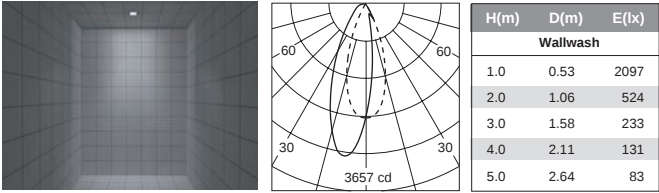




Wallwash

Wide wallwash

2219.200B

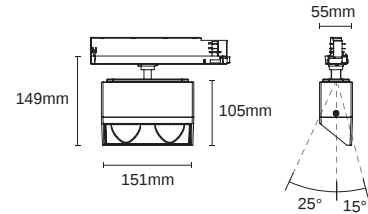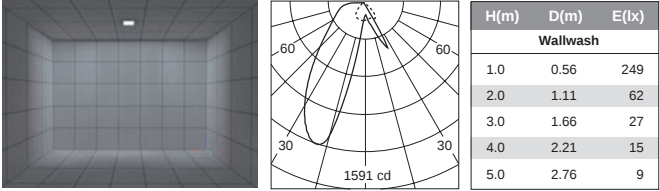

SHELL-T

SHELL-T-SF2
SHELL-T-HC2
SHELL-T-W2



Colours

Body : Black ☒ White ☐

Article number	LED Consumption	Voltage	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2119.204	42W	220-240VAC	1050 mA	3751 lm	2972 lm	Wallwash (Reflector)	3000K	90+
						Shelf floor wallwash	   	IP20
2119.204A	42W	220-240VAC	1050 mA	3751 lm	3235 lm	Wallwash (Reflector)	3000K	90+
						High ceiling wallwash	   	IP20
2119.204B	42W	220-240VAC	1050 mA	3751 lm	2839 lm	Wallwash (Reflector)	3000K	90+
						Wide wallwash	   	IP20

Dimmable





Driver Built-in

IES

Wallwash


Shelf floor wallwash
2119.204



H(m)	D(m)	E(lx)
Wallwash		
1.0	0.51	1828
2.0	1.02	457
3.0	1.54	203
4.0	2.05	114
5.0	2.56	73

Wallwash



High ceiling wallwash
2119.204A




H(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	3066
2.0	1.06	766
3.0	1.59	340
4.0	2.12	191
5.0	2.65	122

Wallwash

Wide wallwash
2119.204B



H(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	347
2.0	1.12	86
3.0	1.68	38
4.0	2.24	21
5.0	2.80	13

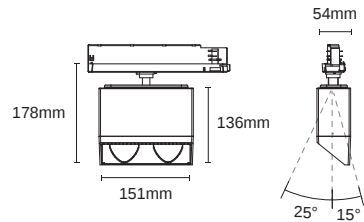






SHELL-D

SHELL-D-SF1
SHELL-D-HC1
SHELL-D-W1

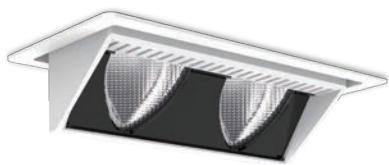

Colours

Body : Black ☒ White ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2214.405	25W	700 mA	2670 lm	2116 lm	Wallwash (Reflector)	3000K	90+
					Shelf floor wallwash	  	IP20
2214.405A	25W	700 mA	2670 lm	2207 lm	Wallwash (Reflector)	1800-3000K	90+
					High ceiling wallwash	  	IP20
2214.405B	25W	700 mA	2670 lm	2010 lm	Wallwash (Reflector)	3000K	90+
					Wide wallwash	  	IP20

Dimmable





Driver Built-in

IES

Wallwash


Shelf floor wallwash
2214.405



H(m)	D(m)	E(lx)
Wallwash		
1.0	0.51	1523
2.0	1.02	380
3.0	1.53	169
4.0	2.04	95
5.0	2.54	60

Wallwash



High ceiling wallwash
2214.405A




H(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	2097
2.0	1.06	524
3.0	1.58	233
4.0	2.11	131
5.0	2.64	83

Wallwash

Wide wallwash
2214.405B




H(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	249
2.0	1.11	62
3.0	1.66	27
4.0	2.21	15
5.0	2.76	9



Cut out : 78X175mm (Trim)

SHELL-D

SHELL-D-SF2
SHELL-D-HC2
SHELL-D-W2

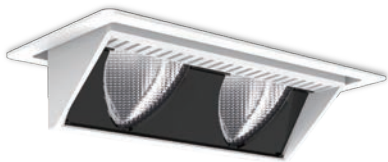

Colours

Body : Black ☒ White ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2114.429	33W	900 mA	3294 lm	2690 lm	Wallwash (Reflector)	3000K	90+
					Shelf floor wallwash	  	IP20
2114.429A	33W	900 mA	3294 lm	2816 lm	Wallwash (Reflector)	3000K	90+
					High ceiling wallwash	  	IP20
2114.429B	33W	900 mA	3294 lm	2660 lm	Wallwash (Reflector)	3000K	90+
					Wide wallwash	  	IP20

Dimmable



Driver Built-in



IES



Wallwash

Shelf floor wallwash

2114.429




H(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	2303
2.0	1.13	575
3.0	1.69	255
4.0	2.25	144
5.0	2.82	92



Wallwash

High ceiling wallwash

2114.429A





H(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	2720
2.0	1.06	680
3.0	1.58	302
4.0	2.11	170
5.0	2.64	108




Wallwash

Wide wallwash

2114.429B



H(m)	D(m)	E(lx)
Wallwash		
1.0	0.50	296
2.0	0.99	74
3.0	1.49	32
4.0	1.98	18
5.0	2.48	11

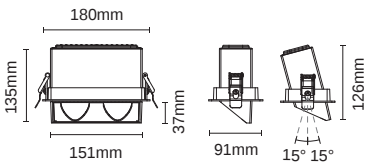

Cut out : 78X175mm (Trim)