




SKY SERIES (EU)

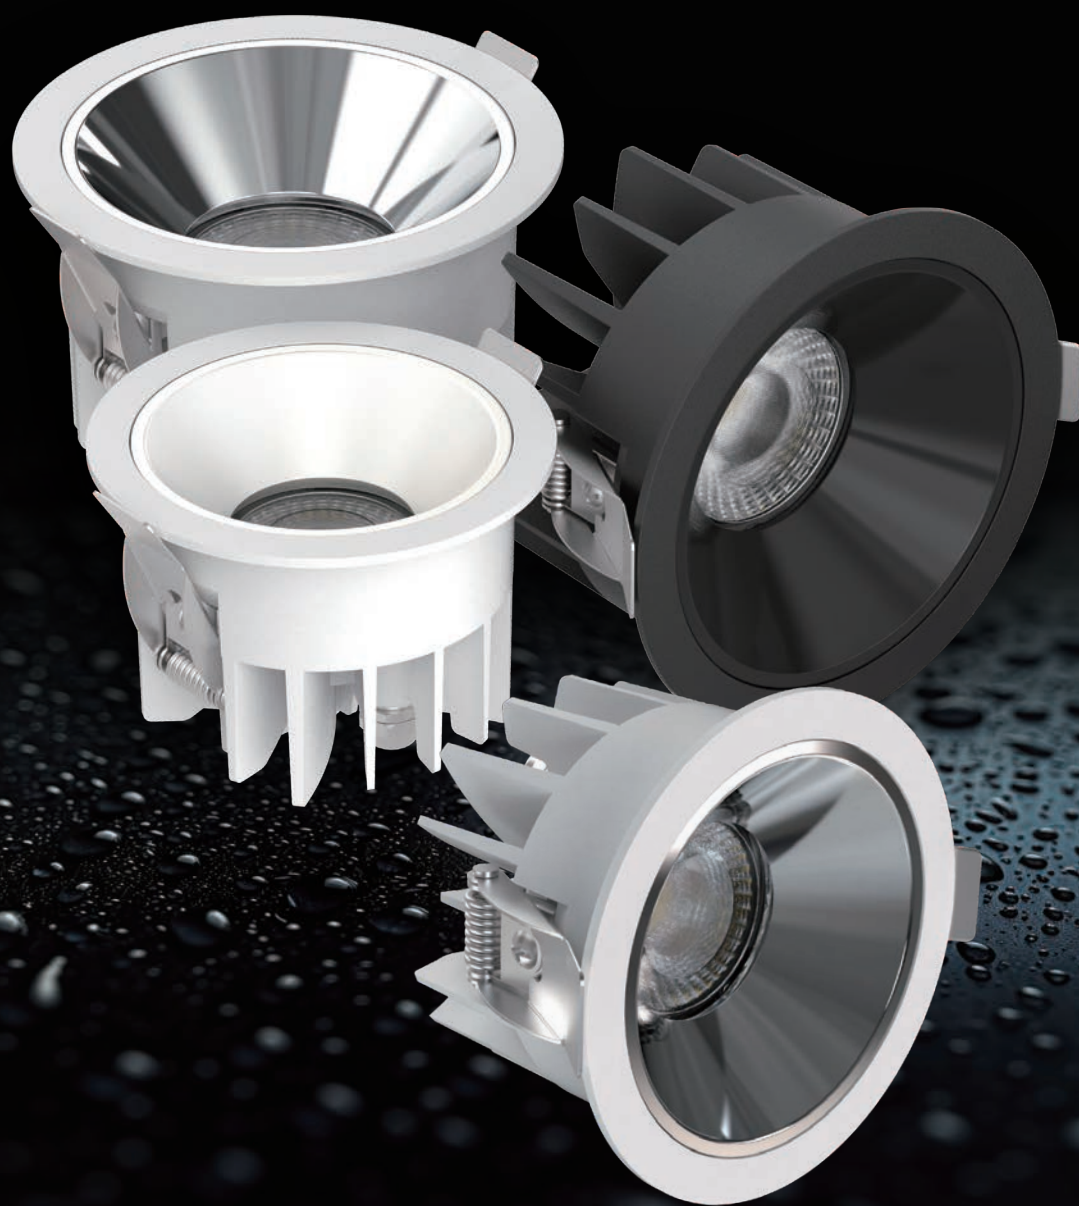

SKY (EU)

Integrated die-cast aluminum heat sink for excellent heat dissipation. The deep baffle design reduces glare, providing a comfortable visual experience.

With an IP65 rating, the entire fixture is water resistant, making it suitable for use in corridors, bathrooms, restrooms, and general office spaces. It is the ideal choice for humid environments.

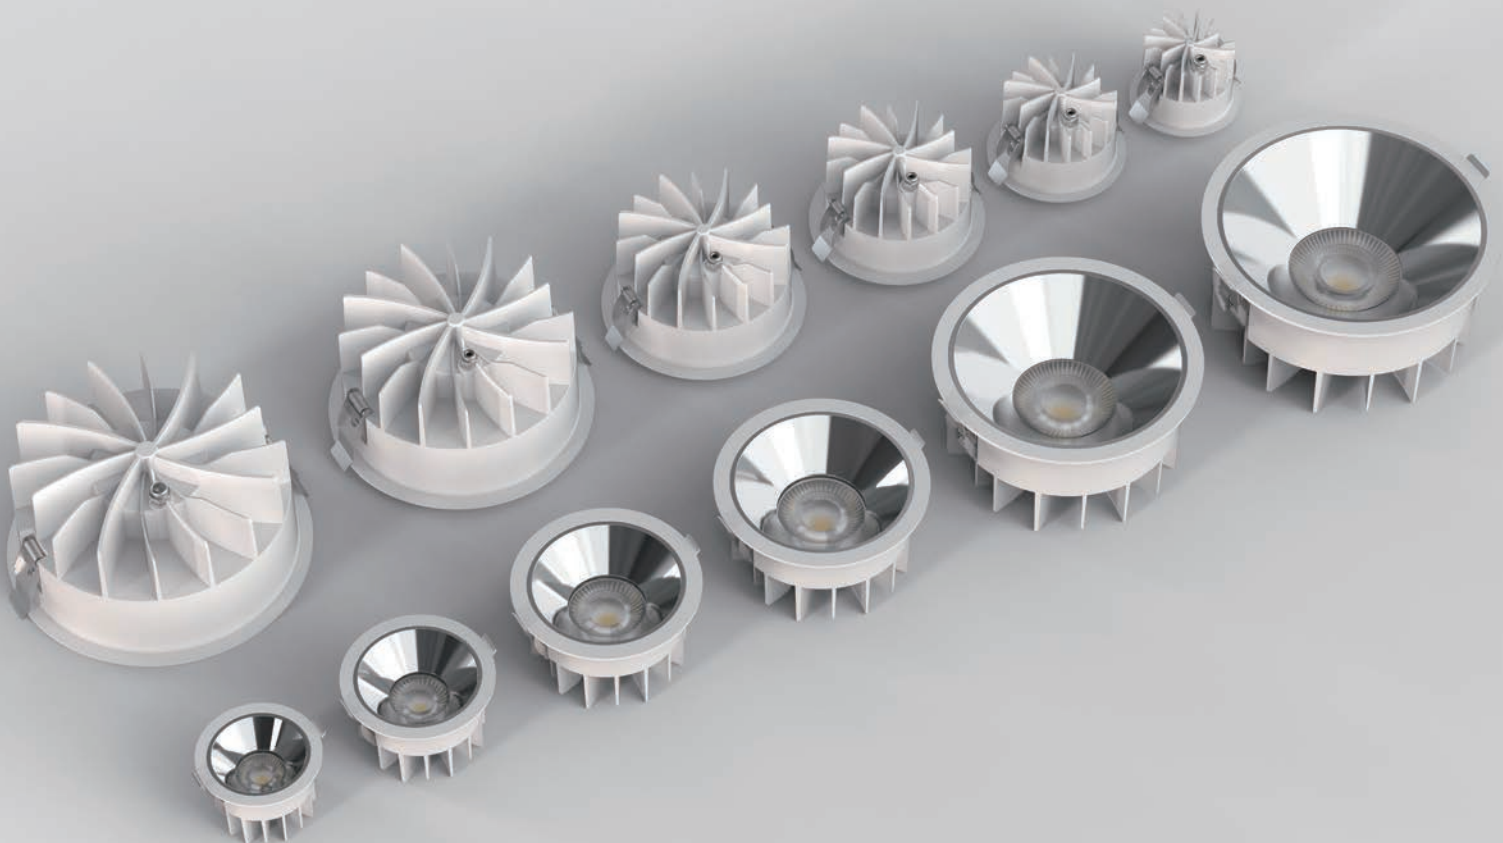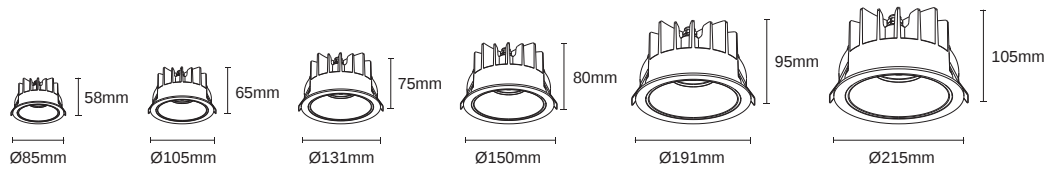

SKY

Recessed downlights



Regular Colors





White



Black



Chrome

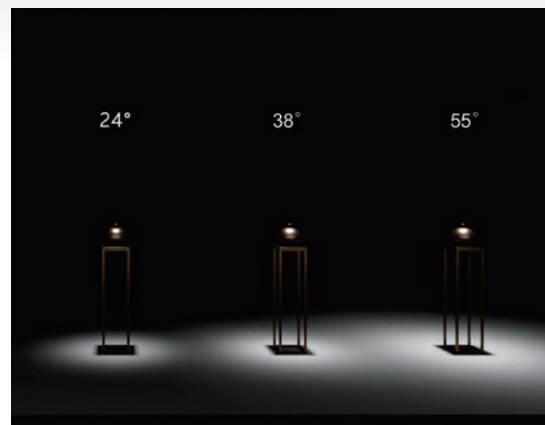
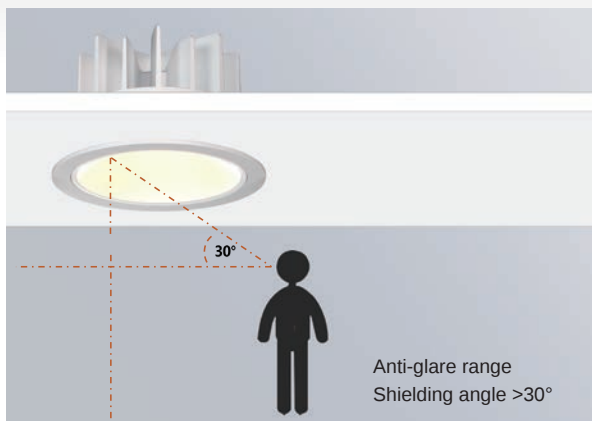


Deep-Recessed Structure, 3D Anti-Glare Design

The anti-glare optical structure ensures the light source is deeply recessed, creating an effect where the light is visible but the fixture is not. The overall illumination is soft, providing bright yet comfortable lighting for the eyes.





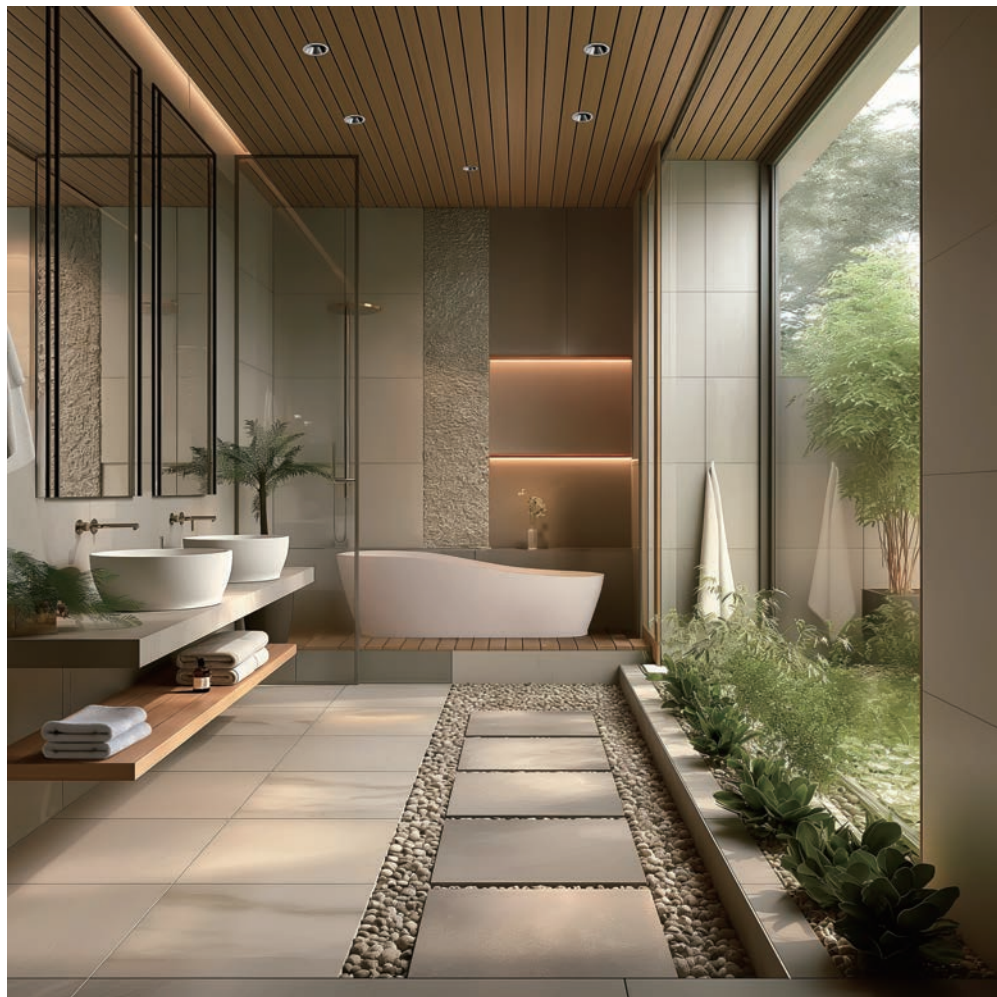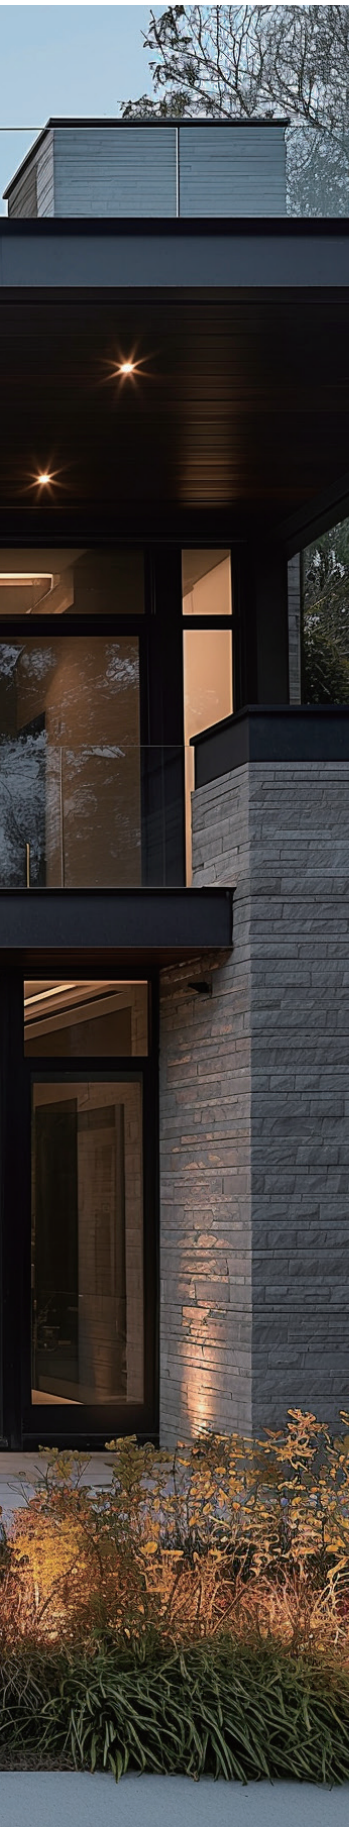




Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.137	9W	250 mA	1321 lm	960 lm	24°/38°/45° (Lens)	3000K	90+



 Cut out : 75mm

Dimmable






Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.138	12W	350 mA	1811 lm	1356 lm	24°/38°/45° (Lens)	3000K	90+



Cut out : 95mm

Dimmable





Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.139	17W	500mA	2706 lm	2020 lm	30°/41°/50° (Lens)	3000K	90+



Dimmable



IES





Fixed UGR<18
2418.139



H(m)	D(m)	E(lx)
30°		
1.0	0.54	2589
2.0	1.09	647
3.0	1.63	287
4.0	2.17	161
5.0	2.72	103





Fixed UGR<17
2418.139




H(m)	D(m)	E(lx)
41°		
1.0	0.74	2096
2.0	1.49	523
3.0	2.23	232
4.0	2.97	131
5.0	3.72	83



Fixed UGR<17
2418.139



H(m)	D(m)	E(lx)
50°		
1.0	0.94	1717
2.0	1.88	429
3.0	2.82	190
4.0	3.76	107
5.0	4.70	68



SKY-150 Round-Fixed

SKY-150-RTF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.140	24W	700mA	3746 lm	2730 lm	27°/44°/56° (Lens)	3000K	90+



Dimmable



IES





Fixed UGR<16
2418.140



H(m)	D(m)	E(lx)
27°		
1.0	0.48	4658
2.0	0.96	1165
3.0	1.45	517
4.0	1.94	291
5.0	2.42	186





Fixed UGR<17
2418.140




H(m)	D(m)	E(lx)
44°		
1.0	0.80	2485
2.0	1.60	621
3.0	2.41	276
4.0	3.21	155
5.0	4.01	99



Fixed UGR<18
2418.140



H(m)	D(m)	E(lx)
56°		
1.0	1.05	1796
2.0	2.10	449
3.0	3.15	199
4.0	4.20	112
5.0	5.25	71



SKY-190 Round-Fixed

SKY-190-RTF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.141	36W	1050mA	5633 lm	4152 lm	29°/42°/56° (Lens)	3000K	90+



Dimmable



IES




Fixed UGR<14
2418.141



H(m)	D(m)	E(lx)
29°		
1.0	0.52	6730
2.0	1.03	1683
3.0	1.55	747
4.0	2.06	420
5.0	2.58	269




Fixed UGR<14
2418.141




H(m)	D(m)	E(lx)
42°		
1.0	0.78	4098
2.0	1.55	1024
3.0	2.33	455
4.0	3.10	256
5.0	3.88	163



Fixed UGR<16
2418.141



H(m)	D(m)	E(lx)
56°		
1.0	1.06	2804
2.0	2.12	701
3.0	3.18	311
4.0	4.24	175
5.0	5.30	112



⌀191mm
Cut out : 175mm

SKY-215 Round-Fixed

SKY-215-RTF



Colours

Bezel : Black ☒ White ☐
Baffle : Black ☒ White ☐ Chrome ☐

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
2418.142	50W	1400mA	7473 lm	5232 lm	30°/48°/57° (Lens)	3000K	90+



Dimmable



IES




Fixed UGR<14
2418.142



H(m)	D(m)	E(lx)
30°		
1.0	0.55	6988
2.0	1.09	1747
3.0	1.64	776
4.0	2.19	436
5.0	2.74	279




Fixed UGR<15
2418.142




H(m)	D(m)	E(lx)
48°		
1.0	0.90	4285
2.0	1.80	1071
3.0	2.70	476
4.0	3.60	267
5.0	4.50	171



Fixed UGR<16
2418.142



H(m)	D(m)	E(lx)
57°		
1.0	1.10	3287
2.0	2.20	821
3.0	3.30	365
4.0	4.40	205
5.0	5.50	131



Cut out : 200mm