

STARLUX SERIES (EU)



RISE's STARLUX deliver high lumens to your spaces while remaining fully workable from below the ceiling plane.

FEATURES

- STARLUX downlight offer a tiny new form element for a minutest downlight artistic.
- Micro trim style is well suited with sheetrock, ACT, wood/ millwork, and many other ceiling materials
- Industry leading luminescence and craftsmanship



LED Source

CRI>90
CCT: 2700K / 3000K / 4000K

Optic

Lens: Medium beam angle more options on request

Dimmable

DALI, TRIAC, 1-10V

Accessories

Honeycomb louver and striped glass available

Finish Colours

Black / White

STARLUX (EU)

Discover the "Starlux" - The Ultimate Lighting Solution!

- Versatile design
- Easy installation
- Modular and customizable
- Low-glare technology
- Low maintenance
- Transform any space

Upgrade your lighting game with the STARLUX. Experience its versatility, easy installation, and customizable features. Say goodbye to glare and enjoy a low-maintenance lighting solution. Transform your space into a well-lit haven today! Illuminate your world with the STARLUX.




STARLUX-50
Recessed downlights




ACOT-96



ACOT-97
LEE-18 Narrow beam
ACOT-97-DW Dim to warm
ACOT-97-WCW Tunable white



Flat
Adjustable



Eye
Adjustable

Round

Trim



Trimless



Square

Trim



Trimless



Combo lights

2 Lamp
Trim



2 Lamp
Trimless



3 Lamp
Trim



3 Lamp
Trimless



STARLUX-88
Recessed downlights



LEE-19-HE
18W



LEE-20
10W / 8°



Adjustable

Round

Trim



Trimless




Square

Trim



Trimless






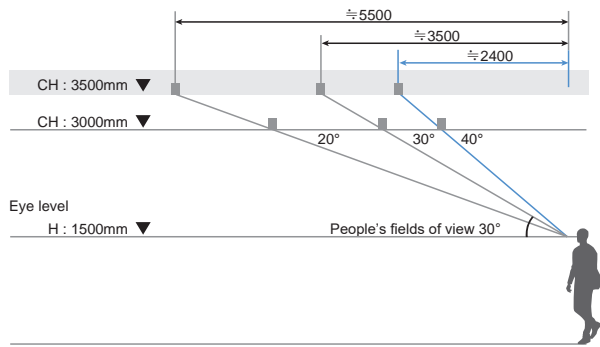

Bigger the cut-off angle, the more the visible glare is reduced


STARLUX-50

STARLUX-88

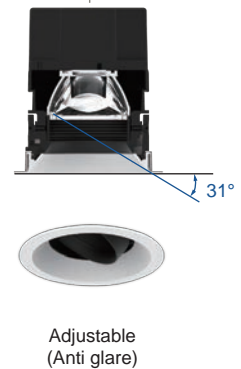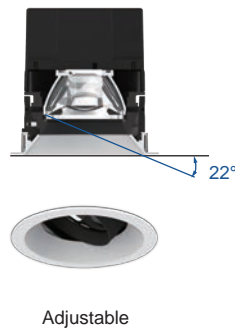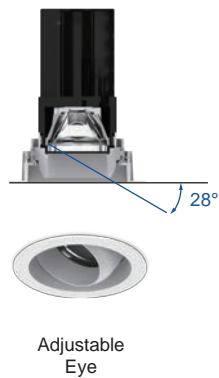

Adjustable anti glare Lighting solution

The STARLUX-88 Adjustable lighting fixture offers high-efficiency illumination and supports the option to add an anti-glare accessory. This additional feature effectively reduces light reflection, providing a softer and more comfortable lighting environment. The fixture can be adjusted based on your needs to meet your visual comfort requirements.

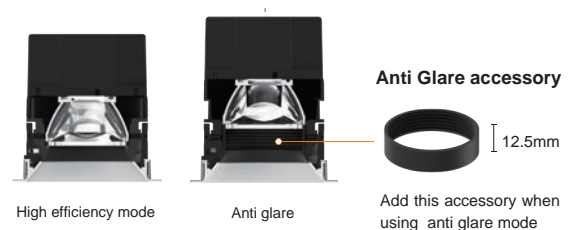





STARLUX-50 ▶

Round
Square
Combo lights

Adjustable - Flat
Eye

STARLUX-50 Round-Adjustable-Flat

STARLUX-50-FLAT-RTA
STARLUX-50-FLAT-RTL



Colours

Bezel : Black White

Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
 2218.510-ACOT-96	7W	350 mA	656 lm	563 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2218.510-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2218.510-ACOT-97	10W	250 mA	913 lm	774 lm	20°/28°/40°/55° (Lens)	3000K	90+
2218.510-ACOT-97-DW	10W	250 mA	14-611 lm	-	20°/28°/40°/55° (Lens)	1800-3000K	90+
2218.510-ACOT-97-WCW	10W	250 mA	740-951 lm	-	20°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
 2218.240F-ACOT-96	7W	350 mA	656 lm	563 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2218.240F-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2218.240F-ACOT-97	10W	250 mA	913 lm	774 lm	20°/28°/40°/55° (Lens)	3000K	90+
2218.240F-ACOT-97-DW	10W	250 mA	14-611 lm	-	20°/28°/40°/55° (Lens)	1800-3000K	90+
2218.240F-ACOT-97-WCW	10W	250 mA	740-951 lm	-	20°/28°/40°/55° (Lens)	2700-6500K	90+

Dimmable




Optional Accessory




ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass

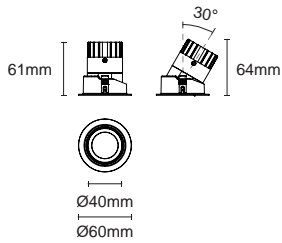


Cut out : 54mm (Trim)

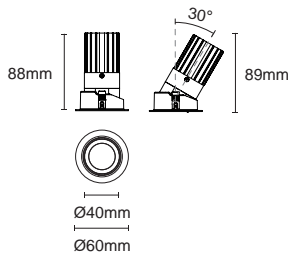

Cut out : 54mm (Trim)

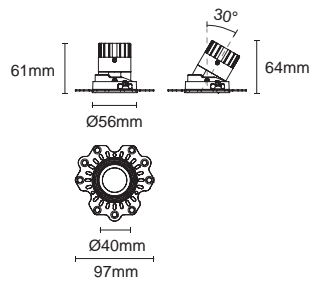

Cut out : 60mm (Trimless)

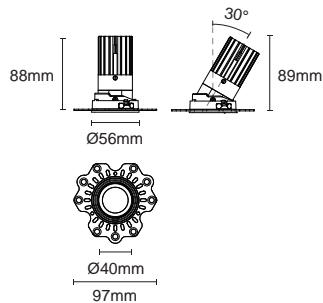

Cut out : 60mm (Trimless)



IES



18°

Adjustable

2218.510-ACOT-96
2218.240F-ACOT-96





H(m)	D(m)	E(lx)
18°		
1.0	0.33	3738
2.0	0.66	934
3.0	0.99	415
4.0	1.32	233
5.0	1.65	149



25°

Adjustable

2218.510-ACOT-96
2218.240F-ACOT-96





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2502
2.0	0.94	625
3.0	1.42	278
4.0	1.89	156
5.0	2.36	100



40°

Adjustable

2218.510-ACOT-96
2218.240F-ACOT-96





H(m)	D(m)	E(lx)
40°		
1.0	0.73	1192
2.0	1.46	298
3.0	2.19	132
4.0	2.92	74
5.0	3.65	47



55°

Adjustable

2218.510-ACOT-96
2218.240F-ACOT-96





H(m)	D(m)	E(lx)
55°		
1.0	1.03	664
2.0	2.06	166
3.0	3.09	73
4.0	4.13	41
5.0	5.16	26



20°

Adjustable

2218.510-ACOT-97
2218.240F-ACOT-97





H(m)	D(m)	E(lx)
20°		
1.0	0.34	4744
2.0	0.68	1186
3.0	1.03	527
4.0	1.37	296
5.0	1.71	189



28°

Adjustable

2218.510-ACOT-97
2218.240F-ACOT-97





H(m)	D(m)	E(lx)
28°		
1.0	0.49	3227
2.0	0.98	806
3.0	1.47	358
4.0	1.96	201
5.0	2.45	129



40°

Adjustable

2218.510-ACOT-97
2218.240F-ACOT-97





H(m)	D(m)	E(lx)
40°		
1.0	0.75	1570
2.0	1.49	392
3.0	2.24	174
4.0	2.99	98
5.0	3.73	62



55°

Adjustable

2218.510-ACOT-97
2218.240F-ACOT-97



H(m)	D(m)	E(lx)
55°		
1.0	1.01	951
2.0	2.02	237
3.0	3.02	105
4.0	4.03	59
5.0	5.04	38

STARLUX-50 Round-Adjustable-Eye

STARLUX-EYE-RTA
STARLUX-EYE-RTL



Colours

Bezel : Black White


Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
 2218.511-ACOT-96	7W	350 mA	656 lm	556 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2218.511-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2218.511-ACOT-97	10W	250 mA	913 lm	756 lm	20°/28°/40°/55° (Lens)	3000K	90+
2218.511-ACOT-97-DW	10W	250 mA	14-611 lm	-	20°/28°/40°/55° (Lens)	1800-3000K	90+
2218.511-ACOT-97-WCW	10W	250 mA	740-951 lm	-	20°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
 2218.241F-ACOT-96	7W	350 mA	656 lm	556 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2218.241F-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2218.241F-ACOT-97	10W	250 mA	913 lm	756 lm	20°/28°/40°/55° (Lens)	3000K	90+
2218.241F-ACOT-97-DW	10W	250 mA	14-611 lm	-	20°/28°/40°/55° (Lens)	1800-3000K	90+
2218.241F-ACOT-97-WCW	10W	250 mA	740-951 lm	-	20°/28°/40°/55° (Lens)	2700-6500K	90+

Dimmable




Optional Accessory




ACHO-18
honeycomb louver
+PC sheet


SG-002
Striped Glass

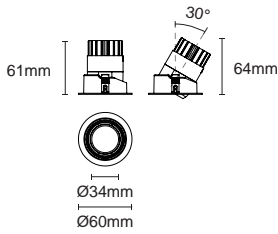


Ⓢ Cut out : 54mm (Trim)

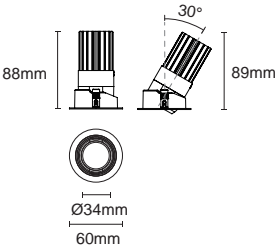

Ⓢ Cut out : 54mm (Trim)

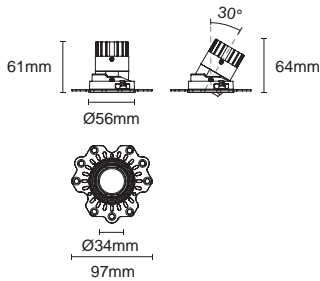

Ⓢ Cut out : 60mm (Trimless)

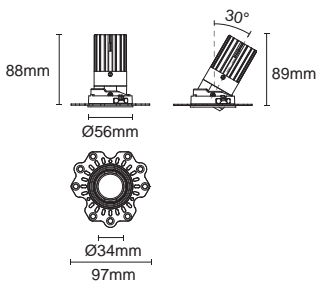



Ⓢ Cut out : 60mm (Trimless)

IES



Adjustable

2218.511-ACOT-96
2218.241F-ACOT-96





H(m)	D(m)	E(lx)
18°		
1.0	0.33	3743
2.0	0.66	935
3.0	1.99	415
4.0	1.32	233
5.0	1.65	149



Adjustable

2218.511-ACOT-96
2218.241F-ACOT-96





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2485
2.0	0.94	621
3.0	1.42	276
4.0	1.89	155
5.0	2.36	99



Adjustable

2218.511-ACOT-96
2218.241F-ACOT-96





H(m)	D(m)	E(lx)
40°		
1.0	0.73	1219
2.0	1.46	304
3.0	2.19	135
4.0	2.92	76
5.0	3.65	48



Adjustable

2218.511-ACOT-96
2218.241F-ACOT-96





H(m)	D(m)	E(lx)
55°		
1.0	1.03	681
2.0	2.07	170
3.0	3.10	75
4.0	4.13	42
5.0	5.17	27



Adjustable

2218.511-ACOT-97
2218.241F-ACOT-97





H(m)	D(m)	E(lx)
20°		
1.0	0.35	4705
2.0	0.70	1176
3.0	1.04	522
4.0	1.39	294
5.0	1.74	188



Adjustable

2218.511-ACOT-97
2218.241F-ACOT-97





H(m)	D(m)	E(lx)
28°		
1.0	0.49	3146
2.0	0.99	786
3.0	1.48	349
4.0	1.97	196
5.0	2.46	125



Adjustable

2218.511-ACOT-97
2218.241F-ACOT-97





H(m)	D(m)	E(lx)
40°		
1.0	0.75	1546
2.0	1.51	386
3.0	2.26	171
4.0	3.02	96
5.0	3.77	61



Adjustable

2218.511-ACOT-97
2218.241F-ACOT-97



H(m)	D(m)	E(lx)
55°		
1.0	1.03	907
2.0	2.06	226
3.0	3.09	100
4.0	4.13	56
5.0	5.16	36

STARLUX-50 Combo lights-Flat





STARLUX-1-FLAT-STA
STARLUX-1-FLAT-STLA




Colours

Bezel : Black White


Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
 2214.411-1-ACOT-96	7W	350 mA	656 lm	568 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2214.411-1-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2214.411-1-ACOT-97	10W	250 mA	913 lm	771 lm	18°/28°/40°/55° (Lens)	3000K	90+
2214.411-1-ACOT-97-DW	10W	250 mA	14-611 lm	571 lm	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.411-1-ACOT-97-WCW	10W	250 mA	740-951 lm	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
 2314.400-1-ACOT-96	7W	350 mA	656 lm	568 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2314.400-1-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2314.400-1-ACOT-97	10W	250 mA	913 lm	771 lm	18°/28°/40°/55° (Lens)	3000K	90+
2314.400-1-ACOT-97-DW	10W	250 mA	14-611 lm	571 lm	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.400-1-ACOT-97-WCW	10W	250 mA	740-951 lm	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

Dimmable




Optional Accessory




ACHO-18
honeycomb louver
+PC sheet


SG-002
Striped Glass

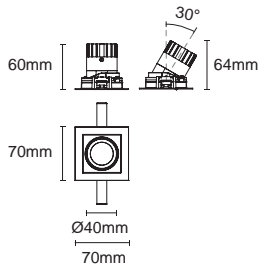


Cut out : 61X61mm (Trim)

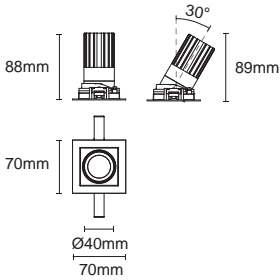

Cut out : 61X61mm (Trim)

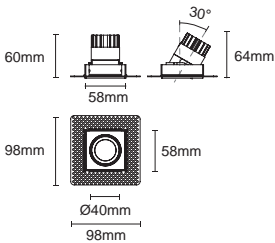

Cut out : 61X61mm (Trimless)

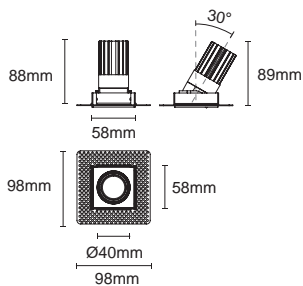

Cut out : 61X61mm (Trimless)



IES



18°

Adjustable

2214.411-1-ACOT-96
2314.400-1-ACOT-96





H(m)	D(m)	E(lx)
18°		
1.0	0.33	3753
2.0	0.66	938
3.0	0.99	417
4.0	1.32	234
5.0	1.65	150



25°

Adjustable

2214.411-1-ACOT-96
2314.400-1-ACOT-96





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2478
2.0	0.95	619
3.0	1.42	275
4.0	1.89	154
5.0	2.36	99



40°

Adjustable

2214.411-1-ACOT-96
2314.400-1-ACOT-96





H(m)	D(m)	E(lx)
40°		
1.0	0.73	1191
2.0	1.46	297
3.0	2.20	132
4.0	2.93	74
5.0	3.66	47



55°

Adjustable

2214.411-1-ACOT-96
2314.400-1-ACOT-96





H(m)	D(m)	E(lx)
55°		
1.0	1.02	680
2.0	2.04	170
3.0	3.06	75
4.0	4.08	42
5.0	5.10	27



18°

Adjustable

2214.411-1-ACOT-97
2314.400-1-ACOT-97





H(m)	D(m)	E(lx)
18°		
1.0	0.32	5302
2.0	0.65	1326
3.0	0.97	589
4.0	1.30	331
5.0	1.62	212



28°

Adjustable

2214.411-1-ACOT-97
2314.400-1-ACOT-97





H(m)	D(m)	E(lx)
28°		
1.0	0.48	3250
2.0	0.96	812
3.0	1.45	361
4.0	1.93	203
5.0	2.41	130



40°

Adjustable

2214.411-1-ACOT-97
2314.400-1-ACOT-97





H(m)	D(m)	E(lx)
40°		
1.0	0.74	1584
2.0	1.48	396
3.0	2.22	176
4.0	2.96	99
5.0	3.70	63



55°

Adjustable

2214.411-1-ACOT-97
2314.400-1-ACOT-97



H(m)	D(m)	E(lx)
55°		
1.0	1.00	945
2.0	1.99	236
3.0	2.99	105
4.0	3.98	59
5.0	4.98	37

STARLUX-50 Combo lights-Flat





STARLUX-2-FLAT-STA
STARLUX-2-FLAT-STLA





Colours


Bezel: Black White


Baffle: Black White


Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
 2214.411-2-ACOT-96	7W X2	350 mA	656 lm X2	568 lm X2	18°/25°/40°/55° (Lens)	3000K	90+
 2214.411-2-LEE-18	10W X2	800 mA	774 lm X2	-	15° (Lens)	3000K	90+
2214.411-2-ACOT-97	10W X2	250 mA	913 lm X2	771 lm X2	18°/28°/40°/55° (Lens)	3000K	90+
2214.411-2-ACOT-97-DW	10W X2	250 mA	14-611 lm X2	571 lm X2	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.411-2-ACOT-97-WCW	10W X2	250 mA	740-951 lm X2	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
 2314.400-2-ACOT-96	7W X2	350 mA	656 lm X2	568 lm X2	18°/25°/40°/55° (Lens)	3000K	90+
 2314.400-2-LEE-18	10W X2	800 mA	774 lm X2	-	15° (Lens)	3000K	90+
2314.400-2-ACOT-97	10W X2	250 mA	913 lm X2	771 lm X2	18°/28°/40°/55° (Lens)	3000K	90+
2314.400-2-ACOT-97-DW	10W X2	250 mA	14-611 lm X2	571 lm X2	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.400-2-ACOT-97-WCW	10W X2	250 mA	740-951 lm X2	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

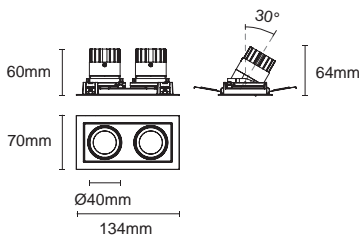


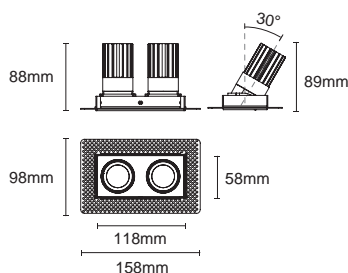
 Cut out : 61X121mm (Trim)

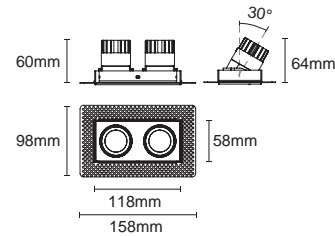


 Cut out : 61X121mm (Trimless)

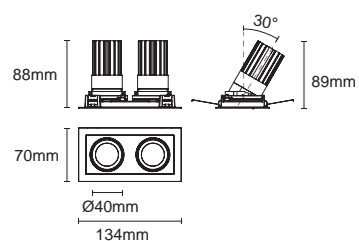

 Cut out : 61X121mm (Trim)



 Cut out : 61X121mm (Trimless)



Dimmable



Optional Accessory



ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass

STARLUX-50 Combo lights-Flat

STARLUX-3-FLAT-STA
STARLUX-3-FLAT-STLA




Colours


Bezel: Black White

Baffle: Black White


Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2214.411-3-ACOT-96	7W X3	350 mA	656 lm X3	568 lm X3	18°/25°/40°/55° (Lens)	3000K	90+
2214.411-3-LEE-18	10W X3	800 mA	774 lm X3	-	15° (Lens)	3000K	90+
2214.411-3-ACOT-97	10W X3	250 mA	913 lm X3	771 lm X3	18°/28°/40°/55° (Lens)	3000K	90+
2214.411-3-ACOT-97-DW	10W X3	250 mA	14-611 lm X3	571 lm X3	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.411-3-ACOT-97-WCW	10W X3	250 mA	740-951 lm X3	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
2314.400-3-ACOT-96	7W X3	350 mA	656 lm X3	568 lm X3	18°/25°/40°/55° (Lens)	3000K	90+
2314.400-3-LEE-18	10W X3	800 mA	774 lm X3	-	15° (Lens)	3000K	90+
2314.400-3-ACOT-97	10W X3	250 mA	913 lm X3	771 lm X3	18°/28°/40°/55° (Lens)	3000K	90+
2314.400-3-ACOT-97-DW	10W X3	250 mA	14-611 lm X3	571 lm X3	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.400-3-ACOT-97-WCW	10W X3	250 mA	740-951 lm X3	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

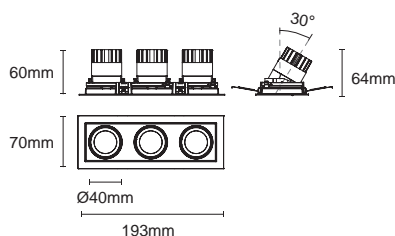


Cut out : 61X181mm (Trim)

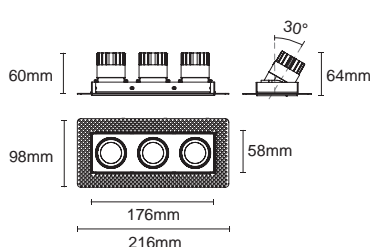

Cut out : 61X181mm (Trimless)

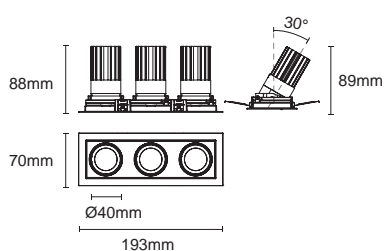

Cut out : 61X181mm (Trim)

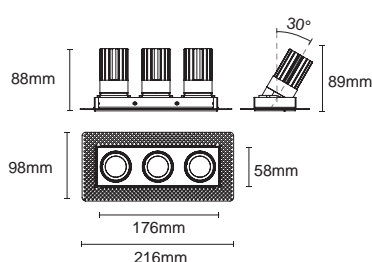


Cut out : 61X181mm (Trimless)



Dimmable



Optional Accessory



ACHO-18
honeycomb louver
+PC sheet

SG-002
Striped Glass

STARLUX-50 Combo lights-Eye

STARLUX-1-EYE-STA
STARLUX-1-EYE-STLA



Colours

Bezel : Black White

Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
 2214.412-1-ACOT-96	7W	350 mA	656 lm	560 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2214.412-1-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2214.412-1-ACOT-97	10W	250 mA	913 lm	757 lm	20°/28°/40°/55° (Lens)	3000K	90+
2214.412-1-ACOT-97-DW	10W	250 mA	14-611 lm	539 lm	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.412-1-ACOT-97-WCW	10W	250 mA	740-951 lm	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
 2314.401-1-ACOT-96	7W	350 mA	656 lm	560 lm	18°/25°/40°/55° (Lens)	3000K	90+
 2314.401-1-LEE-18	10W	800 mA	774 lm	-	15° (Lens)	3000K	90+
2314.401-1-ACOT-97	10W	250 mA	913 lm	757 lm	20°/28°/40°/55° (Lens)	3000K	90+
2314.401-1-ACOT-97-DW	10W	250 mA	14-611 lm	539 lm	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.401-1-ACOT-97-WCW	10W	250 mA	740-951 lm	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

Dimmable




Optional Accessory




ACHO-18
honeycomb louver
+PC sheet




SG-002
Striped Glass

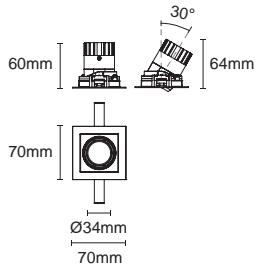


△ Cut out : 61X61mm (Trim)

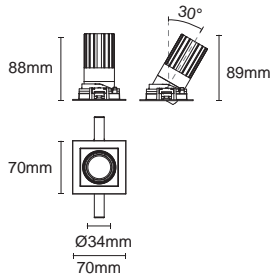

△ Cut out : 61X61mm (Trim)

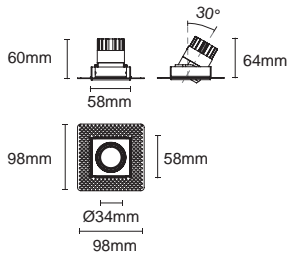

△ Cut out : 61X61mm (Trimless)

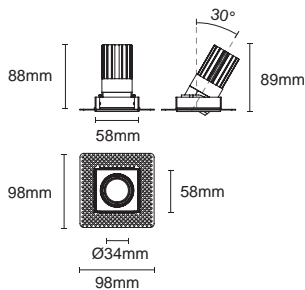



△ Cut out : 61X61mm (Trimless)

IES



Adjustable

2214.412-1-ACOT-96
2314.401-1-ACOT-96





H(m)	D(m)	E(lx)
18°		
1.0	0.33	3690
2.0	0.67	922
3.0	1.00	410
4.0	1.33	230
5.0	1.66	147



Adjustable

2214.412-1-ACOT-96
2314.401-1-ACOT-96





H(m)	D(m)	E(lx)
25°		
1.0	0.47	2545
2.0	0.94	636
3.0	1.41	282
4.0	1.88	159
5.0	2.35	101



Adjustable

2214.412-1-ACOT-96
2314.401-1-ACOT-96





H(m)	D(m)	E(lx)
40°		
1.0	0.73	1180
2.0	1.46	295
3.0	2.19	131
4.0	2.92	73
5.0	3.65	47



Adjustable

2214.412-1-ACOT-96
2314.401-1-ACOT-96





H(m)	D(m)	E(lx)
55°		
1.0	1.03	672
2.0	2.05	168
3.0	3.08	74
4.0	4.10	42
5.0	5.13	26



Adjustable

2214.412-1-ACOT-97
2314.401-1-ACOT-97





H(m)	D(m)	E(lx)
20°		
1.0	0.35	4709
2.0	0.70	1177
3.0	1.05	523
4.0	1.39	294
5.0	1.74	188



Adjustable

2214.412-1-ACOT-97
2314.401-1-ACOT-97





H(m)	D(m)	E(lx)
28°		
1.0	0.50	3092
2.0	1.00	772
3.0	1.49	343
4.0	1.99	193
5.0	2.49	123



Adjustable

2214.412-1-ACOT-97
2314.401-1-ACOT-97





H(m)	D(m)	E(lx)
40°		
1.0	0.75	1571
2.0	1.49	392
3.0	2.24	174
4.0	2.98	98
5.0	3.73	62



Adjustable

2214.412-1-ACOT-97
2314.401-1-ACOT-97



H(m)	D(m)	E(lx)
55°		
1.0	1.00	943
2.0	2.01	235
3.0	3.02	104
4.0	4.03	58
5.0	5.03	37

STARLUX-50 Combo lights-Eye

STARLUX-2-EYE-STA
STARLUX-2-EYE-STLA




Colours


Bezel : Black White

Baffle : Black White


Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2214.412-2-ACOT-96	7W X2	350 mA	656 lm X2	560 lm X2	18°/25°/40°/55° (Lens)	3000K	90+
2214.412-2-LEE-18	10W X2	800 mA	774 lm X2	-	15° (Lens)	3000K	90+
2214.412-2-ACOT-97	10W X2	250 mA	913 lm X2	757 lm X2	20°/28°/40°/55° (Lens)	3000K	90+
2214.412-2-ACOT-97-DW	10W X2	250 mA	14-611 lm X2	539 lm X2	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.412-2-ACOT-97-WCW	10W X2	250 mA	740-951 lm X2	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
2314.401-2-ACOT-96	7W X2	350 mA	656 lm X2	560 lm X2	18°/25°/40°/55° (Lens)	3000K	90+
2314.401-2-LEE-18	10W X2	800 mA	774 lm X2	-	15° (Lens)	3000K	90+
2314.401-2-ACOT-97	10W X2	250 mA	913 lm X2	757lm X2	20°/28°/40°/55° (Lens)	3000K	90+
2314.401-2-ACOT-97-DW	10W X2	250 mA	14-611 lm X2	539 lm X2	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.401-2-ACOT-97-WCW	10W X2	250 mA	740-951 lm X2	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

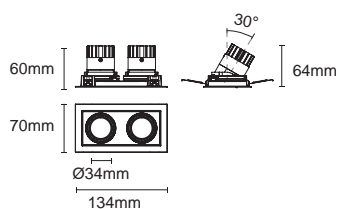


Cut out : 61X121mm (Trim)

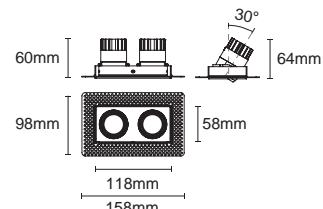

Cut out : 61X121mm (Trimless)

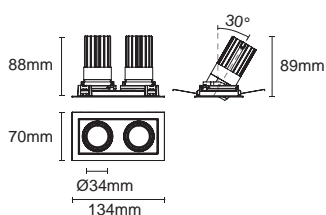

Cut out : 61X121mm (Trim)

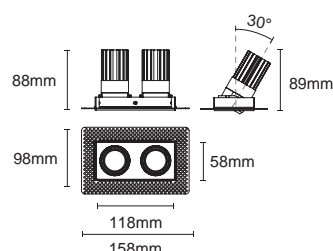


Cut out : 61X121mm (Trimless)



Dimmable



Optional Accessory



ACHO-18
honeycomb louver
+PC sheet

SG-002
Striped Glass

STARLUX-50 Combo lights-Eye

STARLUX-3-EYE-STA
STARLUX-3-EYE-STLA




Colours


Bezel: Black White

Baffle: Black White


Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2214.412-3-ACOT-96	7W X3	350 mA	656 lm X3	560 lm X3	18°/25°/40°/55° (Lens)	3000K	90+
2214.412-3-LEE-18	10W X3	800 mA	774 lm X3	-	15° (Lens)	3000K	90+
2214.412-3-ACOT-97	10W X3	250 mA	913 lm X3	757 lm X3	20°/28°/40°/55° (Lens)	3000K	90+
2214.412-3-ACOT-97-DW	10W X3	250 mA	14-611 lm X3	539 lm X3	18°/28°/40°/55° (Lens)	1800-3000K	90+
2214.412-3-ACOT-97-WCW	10W X3	250 mA	740-951 lm X3	-	18°/28°/40°/55° (Lens)	2700-6500K	90+
Trimless							
2314.401-3-ACOT-96	7W X3	350 mA	656 lm X3	560 lm X3	18°/25°/40°/55° (Lens)	3000K	90+
2314.401-3-LEE-18	10W X3	800 mA	774 lm X3	-	15° (Lens)	3000K	90+
2314.401-3-ACOT-97	10W X3	250 mA	913 lm X3	757 lm X3	20°/28°/40°/55° (Lens)	3000K	90+
2314.401-3-ACOT-97-DW	10W X3	250 mA	14-611 lm X3	539 lm X3	18°/28°/40°/55° (Lens)	1800-3000K	90+
2314.401-3-ACOT-97-WCW	10W X3	250 mA	740-951 lm X3	-	18°/28°/40°/55° (Lens)	2700-6500K	90+

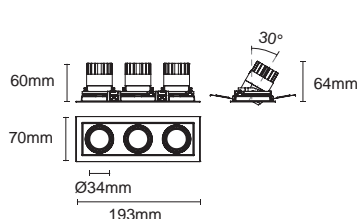


Cut out : 61X181mm (Trim)

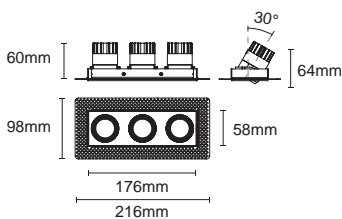

Cut out : 61X181mm (Trimless)

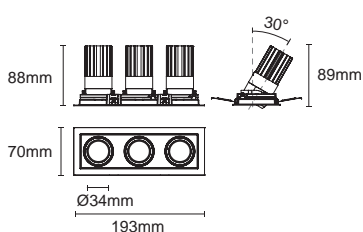

Cut out : 61X181mm (Trim)

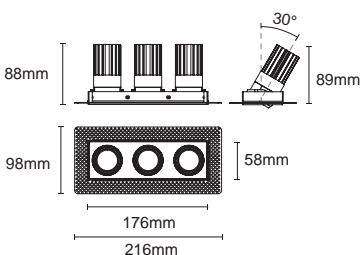


Cut out : 61X181mm (Trimless)



Dimmable



Optional Accessory



ACHO-18 honeycomb louver +PC sheet

SG-002 Striped Glass



STARLUX-88

Round / Square

| Adjustable

STARLUX-88 Round-Adjustable

STARLUX-88-RTA
STARLUX-88-RTL



Colours

Bezel : Black White


Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2218.162-LEE-19-HE	18W	500 mA	2504 lm	2061 lm	18°/24°/40°/55° (Lens)	3000K	90+
2218.162-LEE-20	10W	800 mA	774 lm	-	8° (Lens)	3000K	90+
Trimless							
2218.224F-LEE-19-HE	18W	500 mA	2504 lm	2061 lm	18°/24°/40°/55° (Lens)	3000K	90+
2218.224F-LEE-20	10W	800 mA	774 lm	-	8° (Lens)	3000K	90+

Dimmable



Optional Accessory



S-018
Anti glare ring



H-010
honeycomb louver +PC sheet

IES



Adjustable

2218.162-LEE-19-HE
2218.224F-LEE-19-HE





H(m)	D(m)	E(lx)
18°		
1.0	0.33	8995
2.0	0.65	2249
3.0	0.98	999
4.0	1.31	562
5.0	1.63	359



Adjustable

2218.162-LEE-19-HE
2218.224F-LEE-19-HE





H(m)	D(m)	E(lx)
24°		
1.0	0.43	6900
2.0	0.87	1725
3.0	1.30	766
4.0	1.74	431
5.0	2.17	276



Adjustable

2218.162-LEE-19-HE
2218.224F-LEE-19-HE





H(m)	D(m)	E(lx)
40°		
1.0	0.73	3089
2.0	1.47	772
3.0	2.20	343
4.0	2.93	193
5.0	3.67	123




Adjustable


2218.162-LEE-19-HE
2218.224F-LEE-19-HE



H(m)	D(m)	E(lx)
55°		
1.0	1.03	1530
2.0	2.05	382
3.0	3.08	170
4.0	4.11	95
5.0	5.13	61

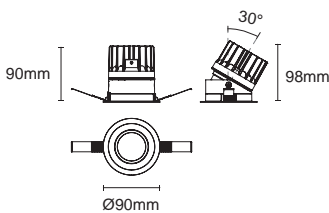

⌀90mm
Cut out : 80mm (Trim)

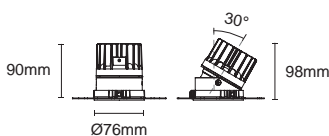

⌀149mm
Cut out : 92mm (Trimless)

STARLUX-88 Square-Adjustable

STARLUX-88-STA
STARLUX-88-STLA




Colours

Bezel : Black White

Baffle : Black White

Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
Trim							
2218.164-LEE-19-HE	18W	500 mA	2504 lm	2141 lm	18°/24°/40°/55° (Lens)	3000K	90+
2218.164-LEE-20	10W	800 mA	774 lm	-	8° (Lens)	3000K	90+
Trimless							
2218.226A-LEE-19-HE	18W	500 mA	2504 lm	2141 lm	18°/24°/40°/55° (Lens)	3000K	90+
2218.226A-LEE-20	10W	800 mA	774 lm	-	8° (Lens)	3000K	90+


Dimmable



Optional Accessory



S-018
Anti glare ring





H-010
honeycomb louver +PC sheet

IES



Adjustable

2218.164-LEE-19-HE
2218.226A-LEE-19-HE





H(m)	D(m)	E(lx)
18°		
1.0	0.33	9829
2.0	0.65	2457
3.0	0.98	1092
4.0	1.31	614
5.0	1.63	393



Adjustable

2218.164-LEE-19-HE
2218.226A-LEE-19-HE





H(m)	D(m)	E(lx)
24°		
1.0	0.43	7528
2.0	0.86	1882
3.0	1.29	836
4.0	1.72	470
5.0	2.15	301



Adjustable

2218.164-LEE-19-HE
2218.226A-LEE-19-HE




H(m)	D(m)	E(lx)
40°		
1.0	0.73	3081
2.0	1.47	770
3.0	2.20	342
4.0	2.94	192
5.0	3.67	123




Adjustable


2218.164-LEE-19-HE
2218.226A-LEE-19-HE



H(m)	D(m)	E(lx)
55°		
1.0	1.03	1532
2.0	2.07	383
3.0	3.10	170
4.0	4.14	95
5.0	5.17	61

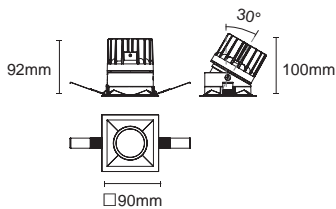

Cut out : 80X80mm (Trim)

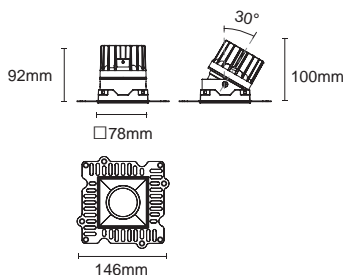

Cut out : 82X82mm (Trimless)