

# AXIS SERIES (EU)



# AXIS Outdoor spotlight

## Sculpt the night with precision lighting.

Designed to enhance landscapes, architecture, and pathways with both function and visual elegance.

### Product Features

- **Precision Optics**  
LEDs with engineered lenses deliver clean, controlled beams from narrow to wide angles—highlighting details while minimizing glare and light spill.
- **Flexible Aiming**  
Sleek adjustable joint allows precise angle control, ideal for shaping tree canopies and accentuating architectural textures.
- **Outdoor Durability**  
Robust metal housing with weather-resistant construction ensures reliable performance under sun, rain, and temperature changes.
- **Versatile Applications**  
Suitable for ground mounting, planting areas, facades, and pathways—meeting diverse outdoor lighting needs.

### 戶外投光燈 **AXIS**

以精準之光，雕塑夜間景觀

為植栽、建築與步道打造兼具功能與美感的照明體驗。

#### 產品特色

- 精準光學

LED 搭配專業透鏡，提供從窄角到廣角的純淨光束，聚焦景觀細節、降低眩光與光溢。

- 靈活調整


簡潔轉軸設計，輕鬆微調照射角度，完美呈現樹影層次與立面光影。

- 戶外耐候


堅固金屬燈體與防水結構，耐日曬風雨，穩定可靠。

- 多元應用

適用地面、植栽、立面與步道，滿足各類戶外照明需求。



AXIS-50



AXIS-66




AXIS-90




## Applications

- **Landscape Planting Illumination**  
Accentuates the natural lines of trees, shrubs, and flowering plants, creating layered and visually dynamic nighttime scenes.
- **Architectural Façade Lighting**  
Enhances the texture and structural character of building exteriors, improving nighttime visibility and identity.
- **Commercial Outdoor Spaces**  
Ideal for hotel gardens, corporate façades, and landscape features, delivering professional-grade illumination effects.

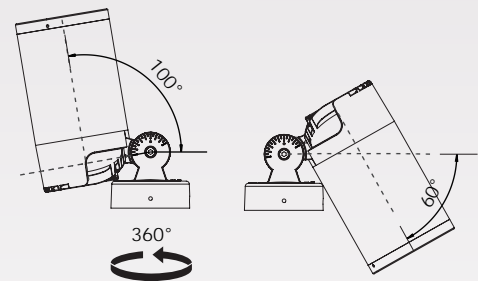

### 應用場景

- 景觀植栽照明  
強調樹木、灌木與花草的自然線條，營造層次分明的夜間視覺效果。
- 建築立面打光  
強化建築外觀的材質與結構感，提升夜間視覺辨識度。
- 商業戶外空間  
飯店庭園、企業外牆、景觀設施等皆能呈現專業級亮化效果。

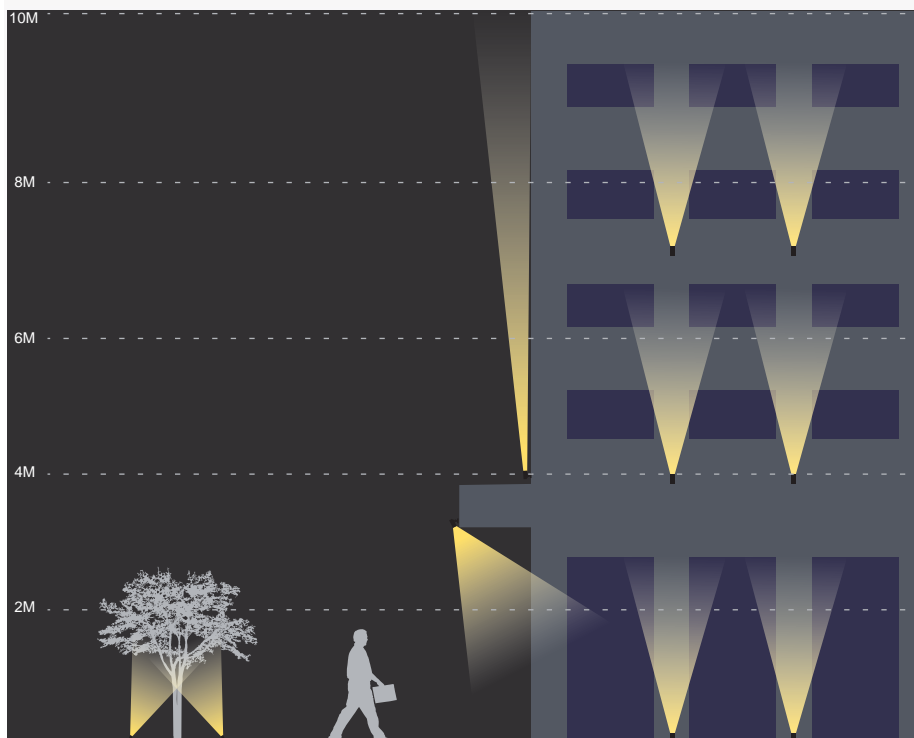

High-rise building light  
projection distance:

Ø50mm	3M
Ø66mm	5M
Ø90mm	9M

# Accessory



Standard



Asymmetrical snout





Long snout




Honeycomb louver




Oval filter or striped glass

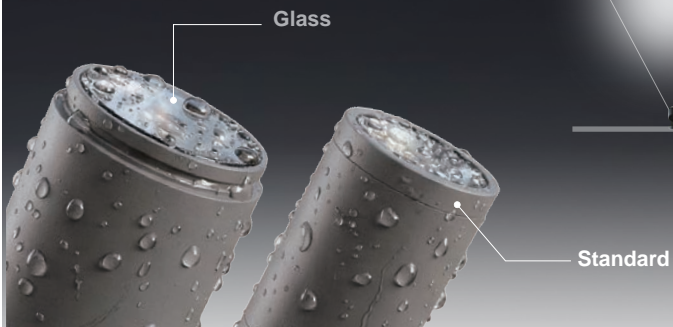


Honeycomb louver + glass




Striped glass




Long snout + glass



Asymmetrical snout

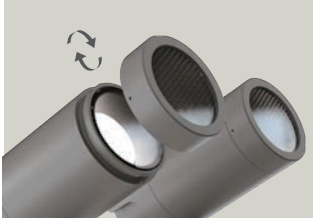

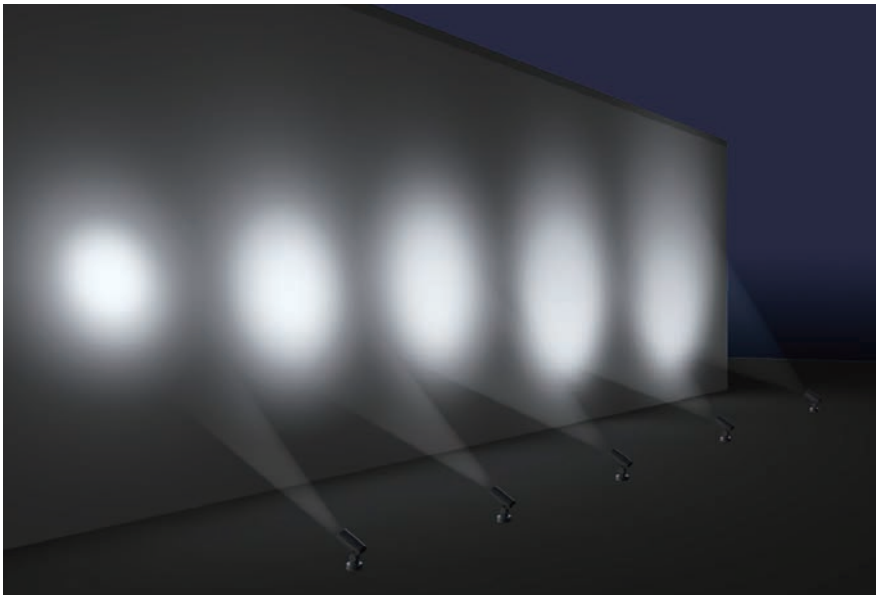

## Versatile light distributions

The AXIS series offers exceptional adjustability with a wide range of beam angle options, from narrow spot to wide flood.

Designed to adapt effortlessly to any environment, its precision-engineered optical lenses produce perfectly circular light patterns with smooth, seamless transitions, beautifully sculpting the architectural silhouette with light.

### 多樣化的光分布

AXIS 系列具備強大的調節能力，我們提供不同角度的選擇，可涵蓋從「窄角聚光」到「廣角」的多種光學表現，燈具都能隨環境應用輕鬆應對，專業光學透鏡設計，光斑圓潤、過渡均勻，為建築勾勒最完美的光形



## IP67 Superior Dust and Water Resistance

Engineered to IP67 standards, the design effectively prevents damage from water ingress during temporary immersion. A pressure-equalizing breather valve is integrated to enhance durability and ensure reliable long-term performance in demanding outdoor conditions.

### 防塵·防水性能佳

IP67防護等級設計可防止浸水造成的損壞。除了卓越的防水性能外，採用了呼吸閥裝置，使其能夠在惡劣的戶外環境下長期使用。






Reference image



Reference image

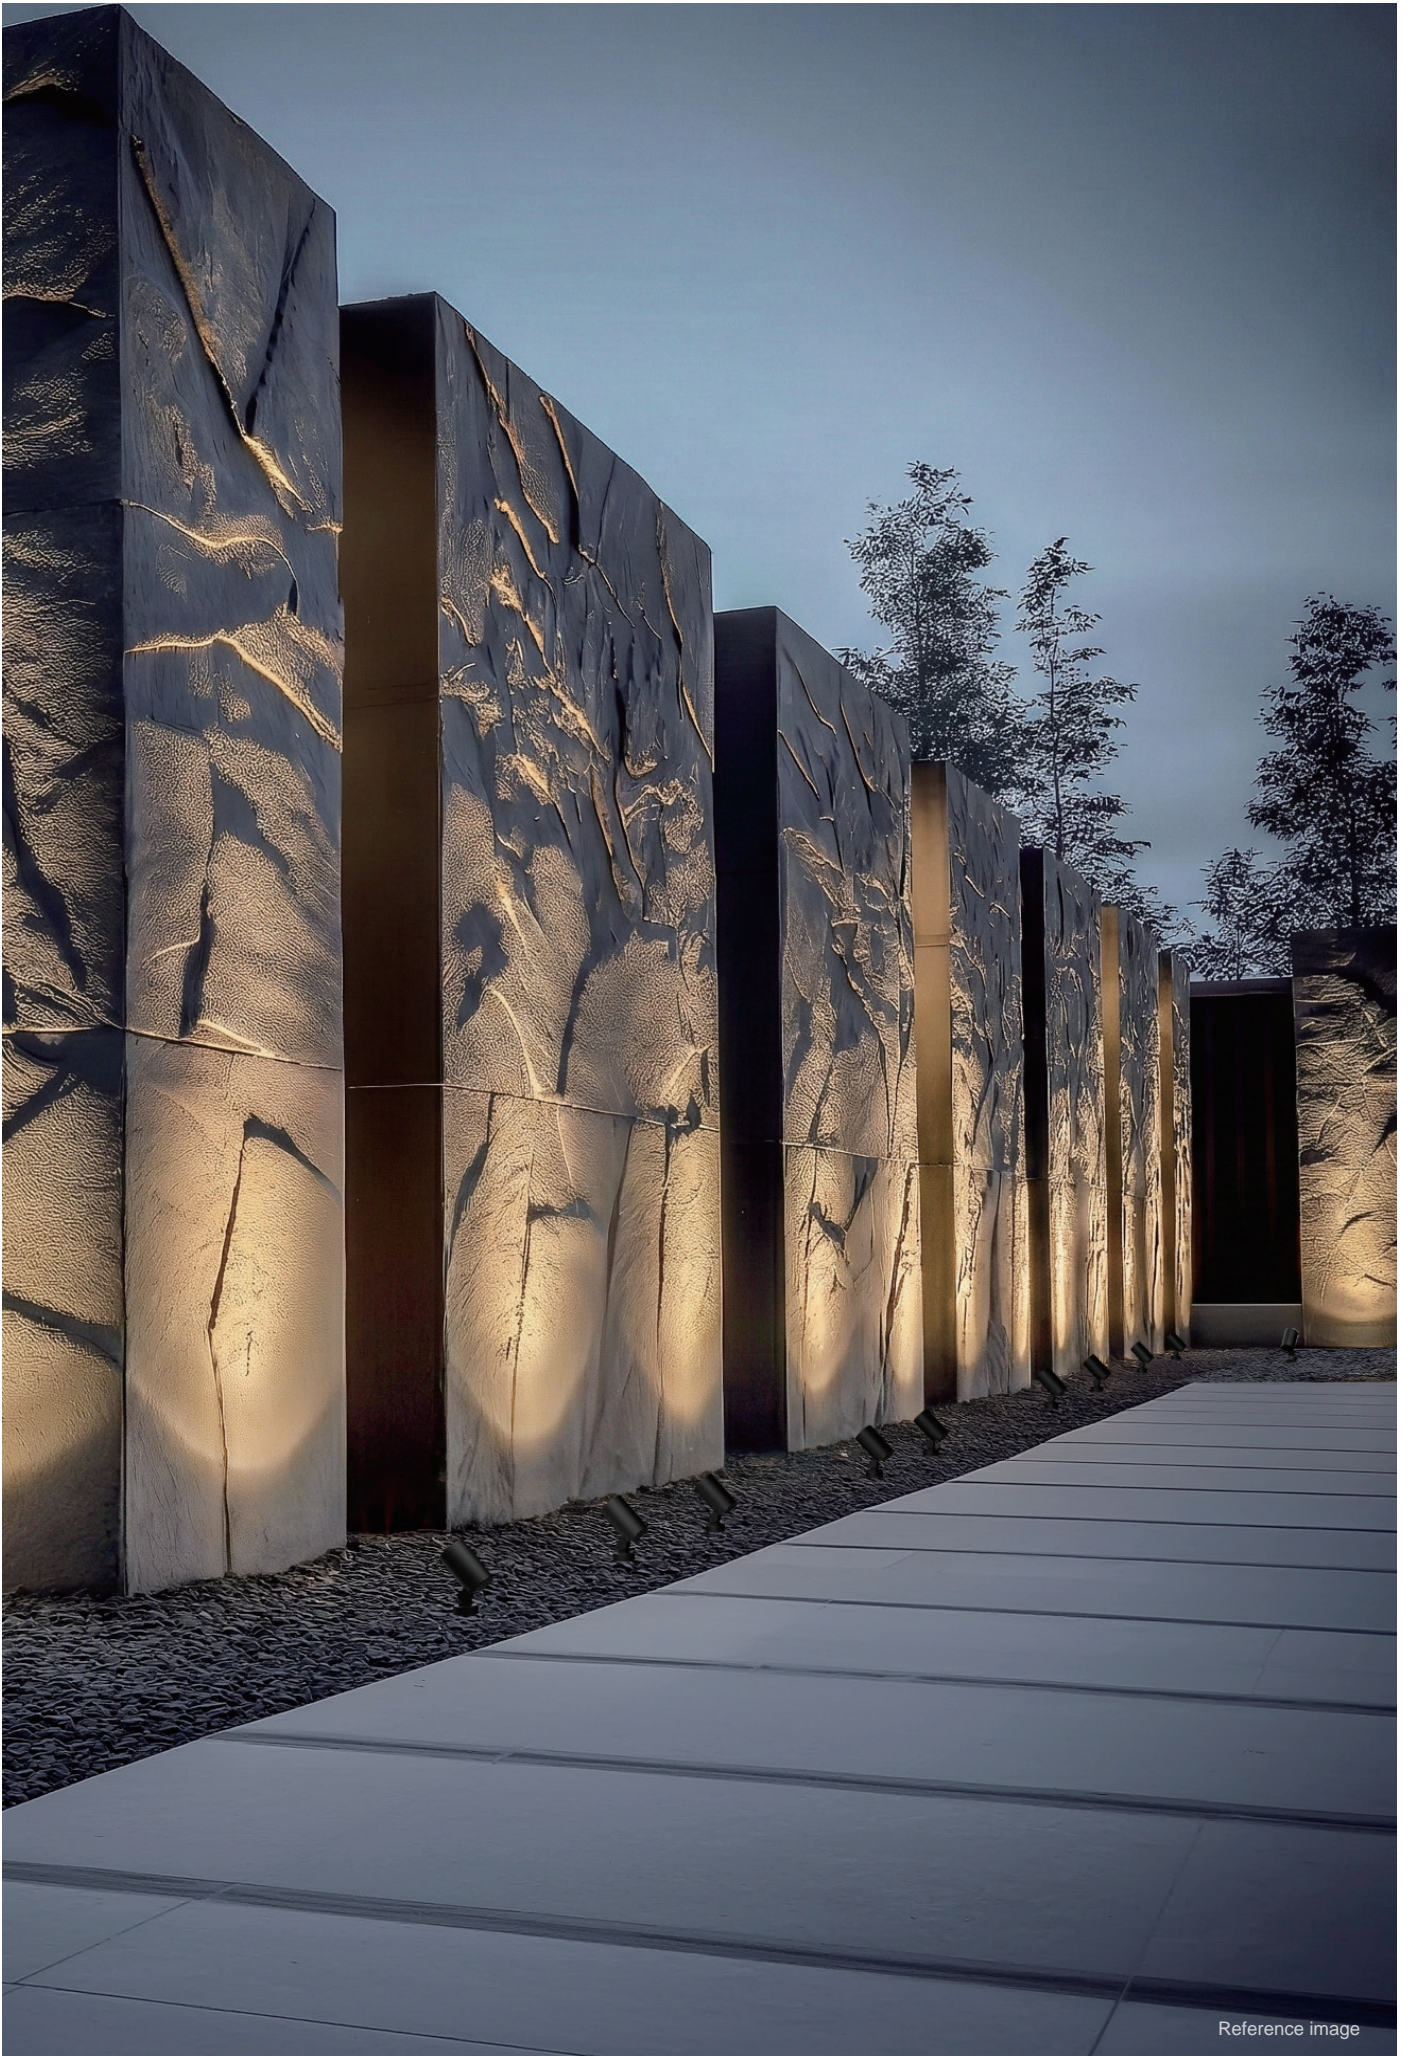



Reference image



Reference image



Reference image



Reference image

# AXIS-50 Spotlight

AXIS-50-RSP




## Colours

Body: Black ■ Grey ■

Article number	LED / Delivered Consumption	Voltage	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2529.402	6.9W / 8W	AC 110V	200 mA	794 lm / -	20°/25°/40°/50°(Lens)	3000K	90
	8.1W / 9W	AC 220V	230 mA	902 lm / 637 lm	20°/25°/40°/50°(Lens)	3000K	90

Driver Built-in




## Optional Accessory



S-022  
Long snout



S-023  
Asymmetrical snout




H-015  
Honeycomb louver



SG-020  
Striped glass



SPIKE-1  
Ground spike





The ceiling height is 300 cm  
The light is 20 cm away from the wall.



Spotlight

2529.402





H(m)	D(m)	E(lx)
<b>20°</b>		
1.0	0.36	2395
2.0	0.71	598
3.0	1.07	266
4.0	1.42	149
5.0	1.78	95



Spotlight

2529.402





H(m)	D(m)	E(lx)
<b>25°</b>		
1.0	0.45	2087
2.0	0.89	521
3.0	1.34	231
4.0	1.79	130
5.0	2.23	83



Spotlight

2529.402





H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.71	1036
2.0	1.42	258
3.0	2.13	115
4.0	2.84	64
5.0	3.55	41



Spotlight

2529.402



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.96	611
2.0	1.92	152
3.0	2.88	67
4.0	3.84	38
5.0	4.80	24

# AXIS-66 Spotlight

AXIS-66-RSP




## Colours

Body : Black ■ Grey ■

Article number	LED / Delivered Consumption	Voltage	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2529.403	11.5W / 15W	AC 110-240V	350 mA	1454 lm / 1261 lm	12°/20°/25°/40°/55°(Lens)	3000K	90

Driver Built-in     




## Optional Accessory



S-024  
Long snoot



S-025  
Asymmetrical snoot




H-016  
Honeycomb louver



SG-021  
Striped glass





SPIKE-1  
Ground spike



The ceiling height is 500 cm  
The light is 20 cm away from the wall.





Spotlight  
2529.403



H(m)	D(m)	E(lx)
<b>12°</b>		
1.0	0.22	8326
2.0	0.44	2082
3.0	0.67	925
4.0	0.89	520
5.0	1.11	333





Spotlight  
2529.403



H(m)	D(m)	E(lx)
<b>20°</b>		
1.0	0.37	4439
2.0	0.74	1110
3.0	1.10	493
4.0	1.47	277
5.0	1.84	177




Spotlight  
2529.403



H(m)	D(m)	E(lx)
<b>25°</b>		
1.0	0.45	4198
2.0	0.91	1050
3.0	1.36	466
4.0	1.82	262
5.0	2.27	167




Spotlight  
2529.403



H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.75	1968
2.0	1.49	492
3.0	2.24	218
4.0	2.99	123
5.0	3.74	78



Spotlight  
2529.403



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	1.01	1029
2.0	2.03	257
3.0	3.04	114
4.0	4.06	64
5.0	5.07	41

# AXIS-90 Spotlight


AXIS-90-RSP



## Colours

Body: Black ■ Grey ■

Article number	LED / Delivered Consumption	Voltage	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2529.404	19.8W / 25W	AC 110-240V	600 mA	2585 lm / 2214 lm	12°/20°/25°/36°/55°(Lens)	3000K	90




## Optional Accessory



S-026  
Long snoot



S-027  
Asymmetrical snoot




H-017  
Honeycomb louver



SG-022  
Striped glass





SPIKE-1  
Ground spike



The ceiling height is 900 cm  
The light is 20 cm away from the wall.





Spotlight  
2529.404



H(m)	D(m)	E(lx)
<b>12°</b>		
1.0	0.21	14287
2.0	0.41	3572
3.0	0.62	1587
4.0	0.83	893
5.0	1.03	571





Spotlight  
2529.404



H(m)	D(m)	E(lx)
<b>20°</b>		
1.0	0.38	7563
2.0	0.76	1891
3.0	1.13	840
4.0	1.51	472
5.0	1.89	302





Spotlight  
2529.404



H(m)	D(m)	E(lx)
<b>25°</b>		
1.0	0.46	7716
2.0	0.91	1929
3.0	1.37	857
4.0	1.82	482
5.0	2.28	308





Spotlight  
2529.404



H(m)	D(m)	E(lx)
<b>36°</b>		
1.0	0.66	3693
2.0	1.32	923
3.0	1.98	410
4.0	2.64	230
5.0	3.30	147



Spotlight  
2529.404



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	0.99	2043
2.0	1.99	510
3.0	2.98	227
4.0	3.97	127
5.0	4.97	81