

DISPLAY LIGHTING (EU)

Display lighting

- Micro-sized design showcase lighting
- Unique optical design, fine surface treatment
- Perfect for your boutiques & retail experience
- Emphasize the value of product




Display lighting (EU)

The Display lighting series represents a significant advancement in small-scale innovation, specifically designed to revolutionize the lighting methodologies utilized for store windows. It ensures optimal visibility of displayed items with minimal obstruction. This elegant yet robust product features outstanding lighting performance and effectively enhances the presentation of showcased items. Equipped with the latest generation of LED light sources, available in color temperatures of 3000K and 4000K, the DIVA series guarantees high quality, efficiency, and exceptional color rendition. Its introduction fundamentally transforms the lighting paradigm for display cabinets, thereby facilitating the comprehensive showcasing of all merchandise.

Whether functioning as an essential minimalist lighting fixture or accentuating the intricate details of items, it maximizes exposure in an exemplary manner. This unique, premium-quality product offers a novel shopping experience through its innovative optical lens. It improves light distribution while minimizing glare, ensuring an optimal illumination experience.

Types

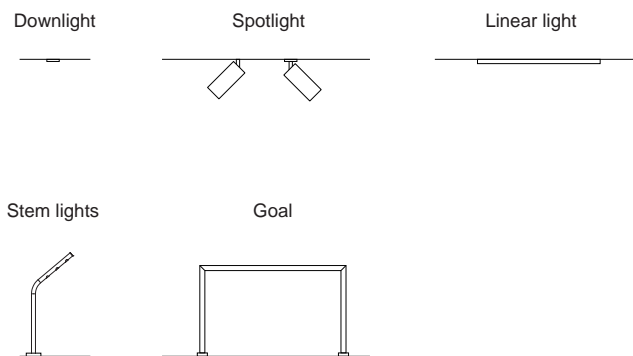

Display lighting

TAURUS

Downlight & Spotlight

Ø12mm



Ø20mm



Ø41mm



Ø41mm
zoomable



Ø65mm



Ø13mm



Ø23mm



Ø23mm
framing

DIVA

Spotlight & Stem lights




Ø13mm



Ø15mm




Ø21mm




DIVA
Stem lights



DIVA
Goal & Linear light

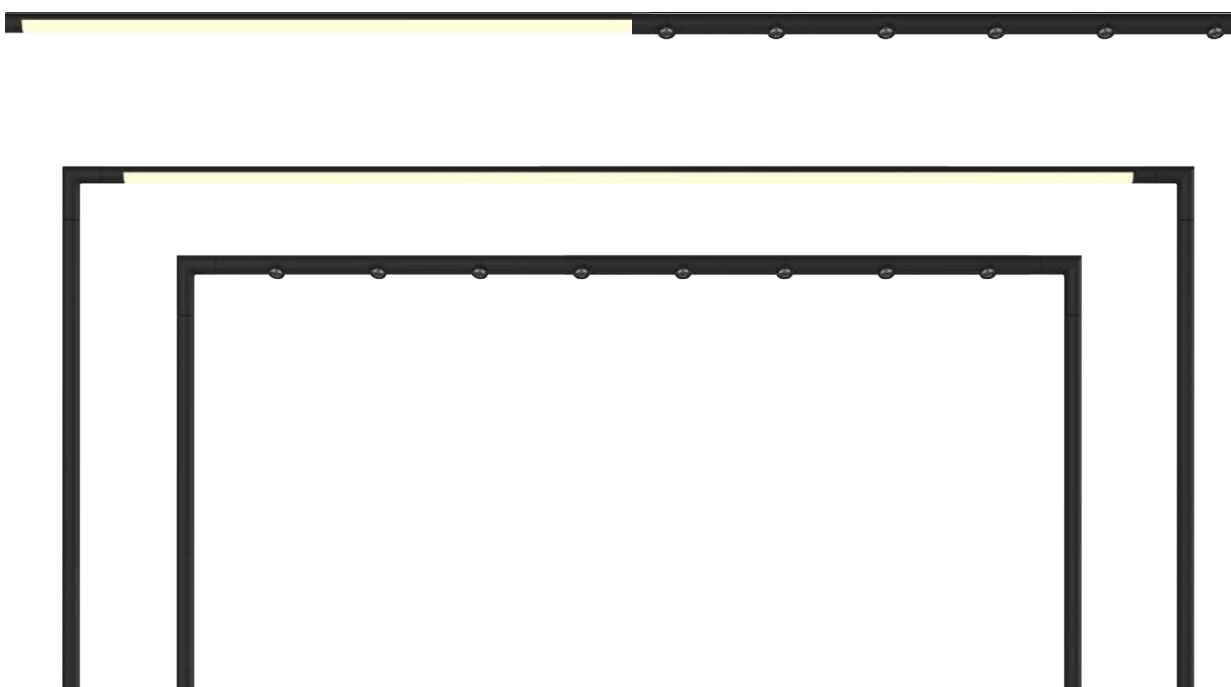

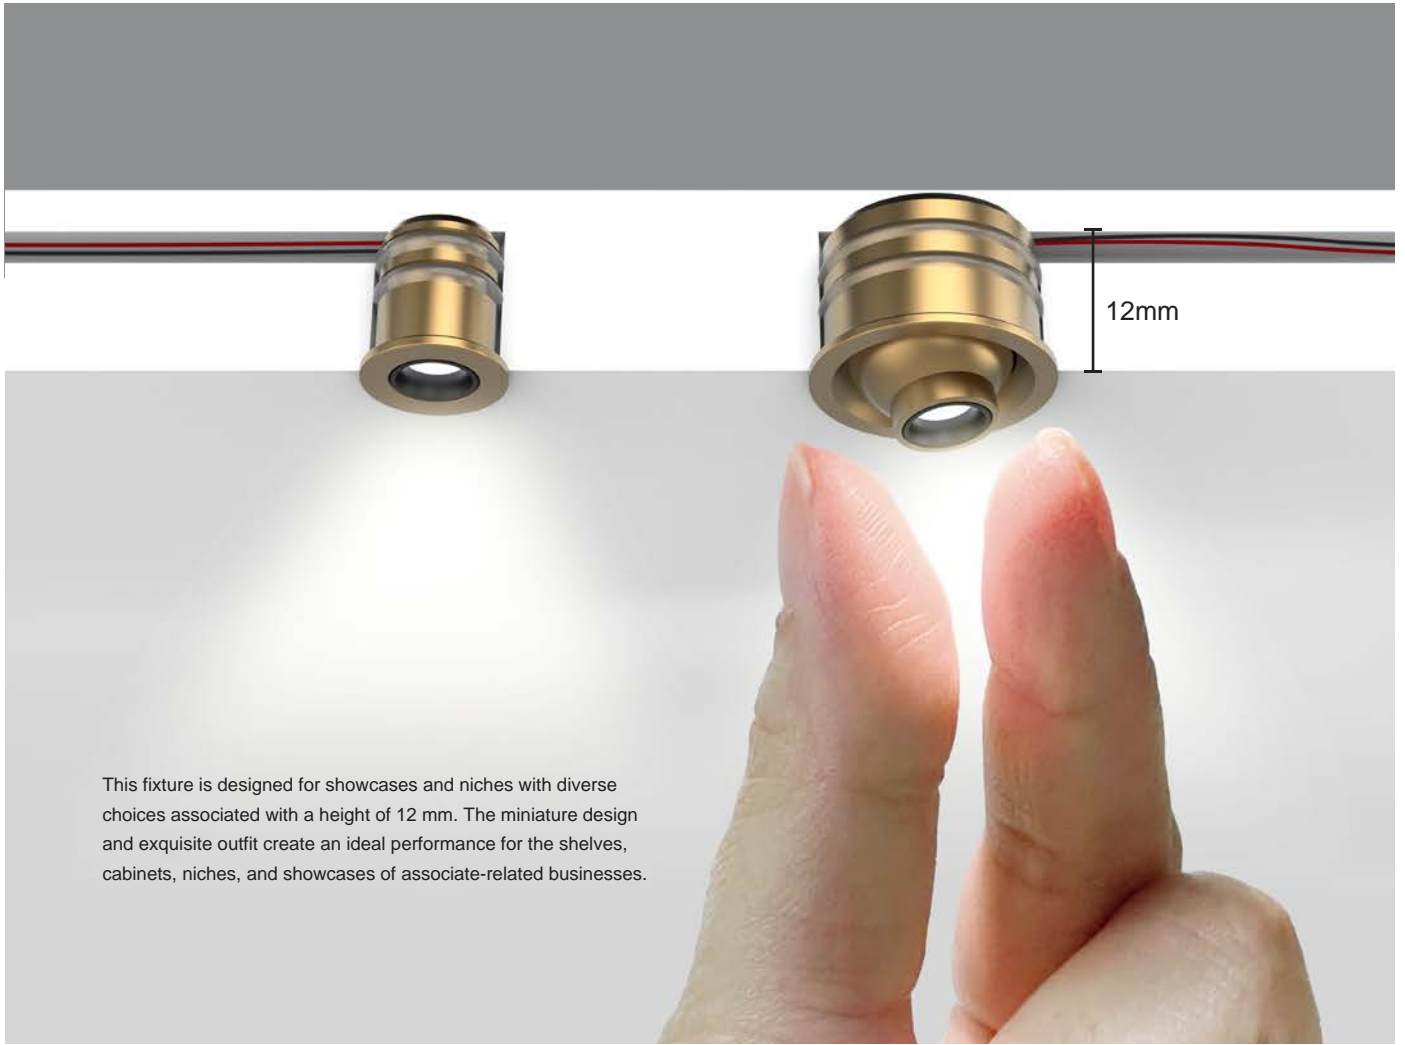

TAURUS Fixed


TAURUS-12-F



Colours

Body : Brass

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.100	1W / 1W	300 mA	84 lm / 52 lm	20° (Lens)	3000K	90+



Cut out : 10.5mm

TAURUS Chameleon eyes



TAURUS-20-A



Colours

Body : Brass

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.101	1W / 1W	300 mA	84 lm / 58 lm	20° (Lens)	3000K	90+



Cut out : 18mm



The most robust spotlight

This recessed premium spotlight is designed to display the beauty of fine items from the showcase. Even though its size is small, this spotlight carries robust lighting capabilities and adds a touch of brilliance to your environment. Furthermore, its 360° rotation and 90° tilt versatility, grant you flexible control over lighting to ensure every detail of your items is highlighted.


Moreover, this fixture is available in two sizes to meet the most sophisticated requirements in limited spaces. It is an ideal light fixture for the retail, hospitality, and luxury residential sectors. Appreciating the exquisite design and outstanding performance, the DIVA series brings elegance and sophisticated efficiency. This will provide an extraordinary display experience with a boutique and stylish design.



Quick-install luminaire
base with DC power jack



Quick-install
DC Jack

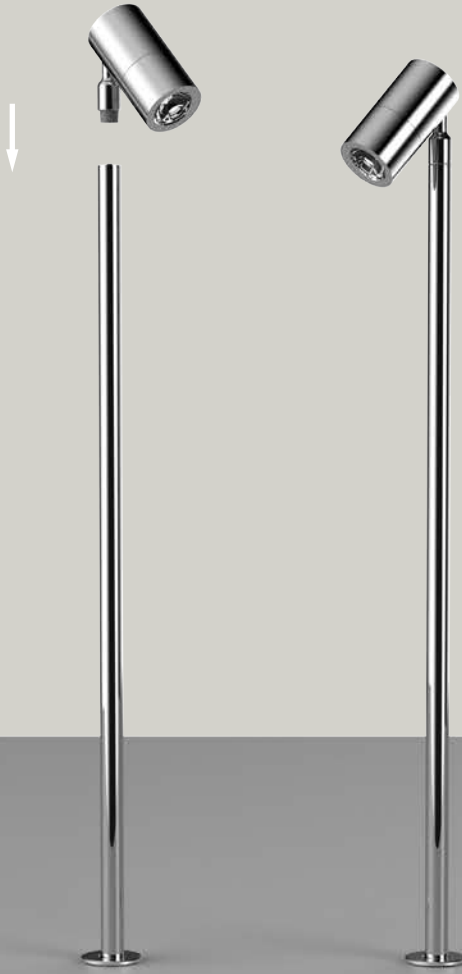

DIVA Spotlight-13


DIVA-13-RTSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.101	1W / 1W	350 mA	125 lm / 90 lm	20°/25°/40°(Lens)	3000K	90+

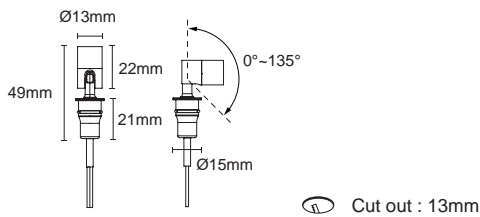

DIVA Spotlight-15


DIVA-15-RTSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.102	1.7W / 2W	500 mA	180 lm / 140 lm	20°/30°/45°(Lens)	3000K	90+

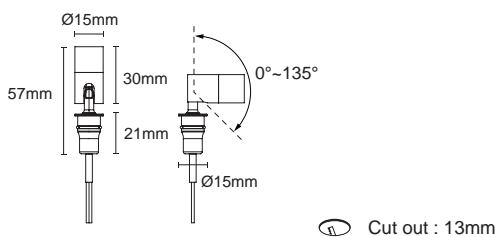

DIVA Spotlight-21


DIVA-21-RTSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.103	2.6W / 3W	700 mA	255 lm / 210 lm	15°/25°/40°(Lens)	3000K	90+



Cut out : 13mm



"Do not hot swap"

Ensure the power is turned off prior to installation or removal.
Operating under live power may result in damage to the luminaire.

DIVA Stem lights-13


DIVA-13-RSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.104B	1W / 1W	350 mA	125 lm / 90 lm	20°/25°/40°(Lens)	3000K	90+

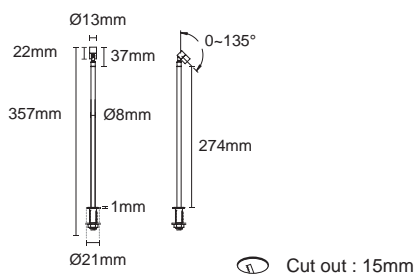

DIVA Stem lights-15


DIVA-15-RSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.105B	1.7W / 2W	500 mA	180 lm / 140 lm	20°/30°/45°(Lens)	3000K	90+

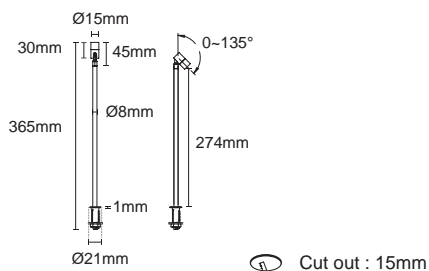

DIVA Stem lights-21


DIVA-21-RSP



Colours

Haze Chrome Black Brass

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2668.106B	2.6W / 3W	700 mA	255 lm / 210 lm	15°/25°/40°(Lens)	3000K	90+




⊗ Cut out : 15mm



"Do not hot swap"

Ensure the power is turned off prior to installation or removal. Operating under live power may result in damage to the luminaire.

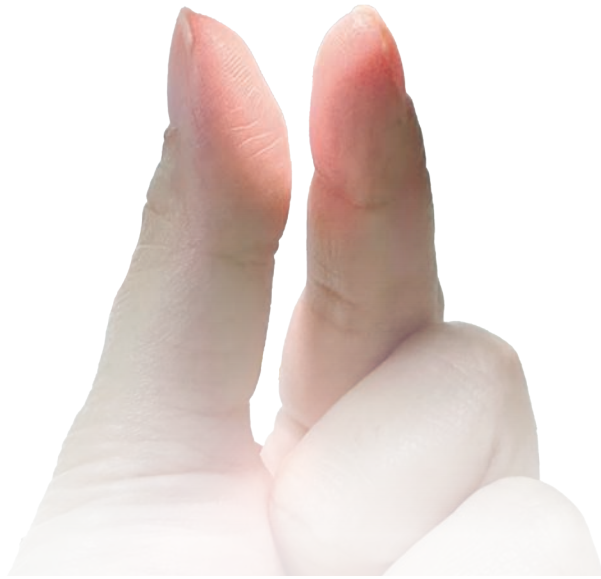

TAURUS-13 Spotlight


TAURUS-S1W



Colours

Body: Brass ■ Black ■

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.105	0.9W / 0.9W	300 mA	96 lm / 82 lm	25°/35°/50° (Lens)	3000K	90+



Cut out : 5mm

Optional Accessory



S-014-xxR
Snoot

TAURUS-23 Spotlight


TAURUS-S3W



Colours

Body: Brass ■ Black ■

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.106	2.3W / 2.4W	700 mA	210 lm / 173 lm	15°/27°/32° (Lens)	3000K	90+



Cut out : 5mm

Optional Accessory



H-003
Honeycomb louver

DS-004
Asymmetric Diffusers

DS-005
Diffusers



Professional-grade optical lens

A combination of versatility and high-quality multi-layer lenses enhances light transmission and performance.

This optic lens provides high flexibility, balanced efficiency light output, and a precise zooming adjustment.



Circle




Trapezoid



Irregular shape



Square

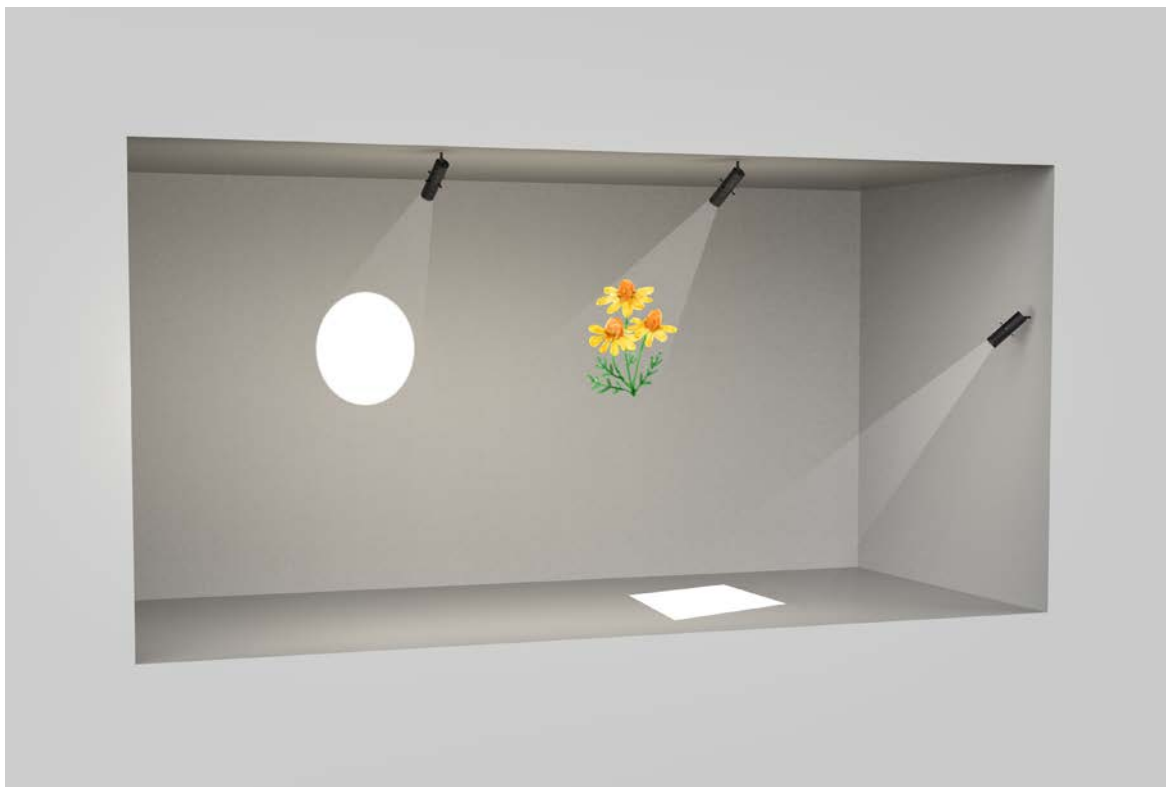

TAURUS Spotlight


TAURUS-S3WF



Colours

Body : Black ■

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.108F	2.4W / 2.5W	700 mA	193 lm / 38 lm	18°~35°	3000K	90+



⊕ Cut out : 5mm


Optional Accessory



CF-006-xxx
Color filter



GOBO-004-xxx...
OEM GOBO,
please contact with our sales rep for more info

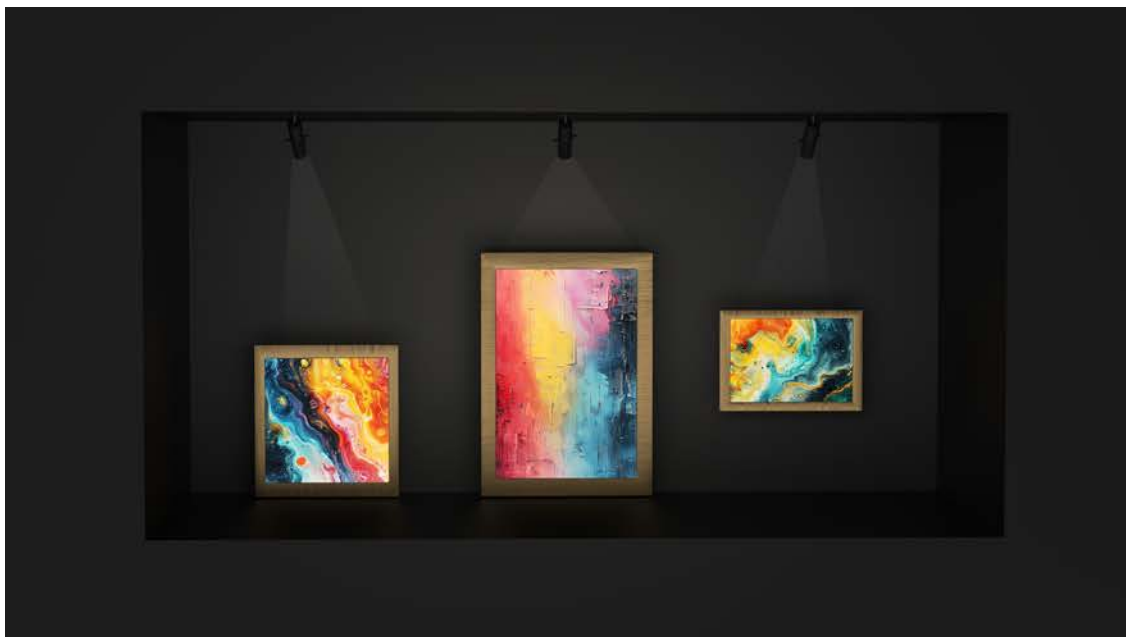





Colours

Body: Black White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2368.100	3.1W / 3.1W	700 mA	225 lm / 185 lm	25°/30°/35° (Lens)	3000K	90+



 Cut out : 35mm








Colours

Body : Black White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2368.100Z	3.1W / 3.1W	700 mA	210 lm / 112 lm	20°-27°	3000K	90+




 Cut out : 35mm



Zoomable

This recessed premium display lighting fixture is your best choice for showcasing premium items. It features a compact size and elegant design, providing unique lighting effects for your premium displays. With its unique function, simply rotating the front ring allows you to effortlessly adjust the beam's illumination area to meet your various display needs.

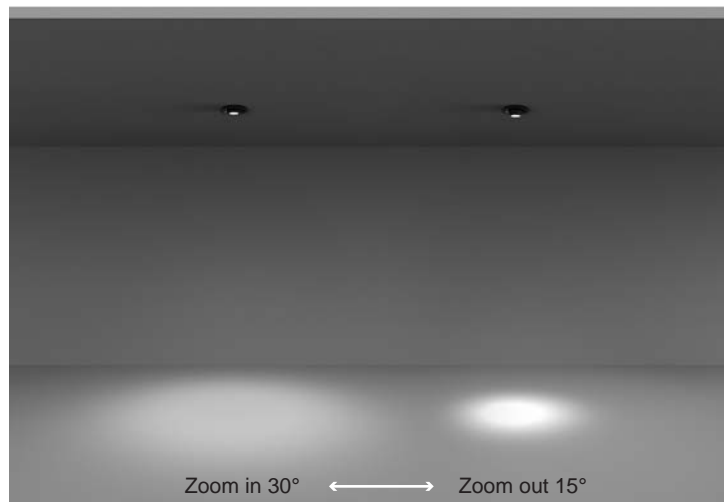

TAURUS Chameleon eyes


TAURUS-55-A




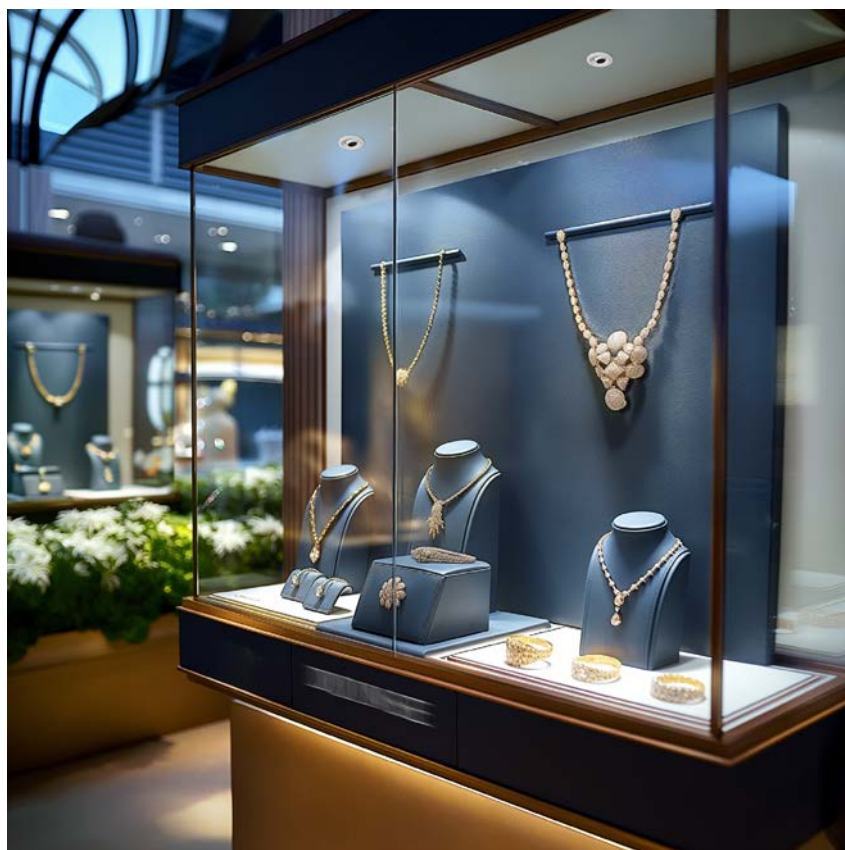

Colours

Body: Black White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.107	5W / 5W	350 mA	383 lm / 301 lm	15°/25°/40° (Lens)	3000K	90+



 Cut out : 55mm








Variety of styles

The diva series represents an exemplary choice for the presentation of your products. It not only showcases a visually stunning design but also provides robust functionality to enhance the appeal of your product displays. This lighting fixture is equipped with two varieties of bases, namely thin and thick, each catering to diverse display requirements and aesthetic preferences. The thin base offers a sleek, minimalist aesthetic that seamlessly integrates with the tabletop. In contrast, the thick base presents increased stability and elegance, characterized by a diamond-patterned design that imparts a sense of luxury and sophistication. The diva series produces exceptional lighting effects, accentuating the beauty and brilliance of your products. Whether utilized for commercial displays or home environments, it enables your products to emanate distinctive charm, ensuring outstanding display performance and a gratifying user experience.

Height adjustable

Liberal and flexible 360-degree rotating and adjustment in height and base for different applications whenever you require.

Its unique adjustable function feature ensures that can adjust according to different display needs. Allowing each piece of jewelry to receive proper illumination to show its beauty and uniqueness.

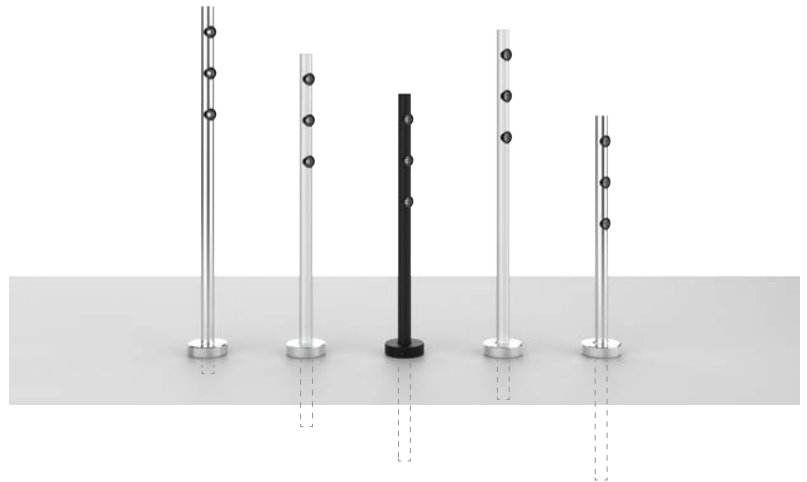





DIVA Bend

DIVA-B




Colours

Haze Chrome Black


Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
 2468.102A	3.2W / 3.4W	350 mA	270 lm / 228 lm	20° (Lens)	3000K	90+
 2468.102B	3.2W / 3.4W	350 mA	270 lm / 228 lm	20° (Lens)	3000K	90+

IP20

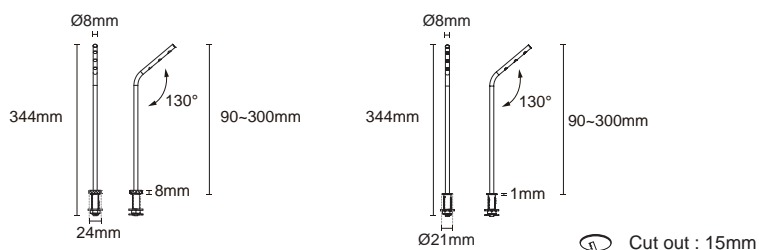



DIVA Upright

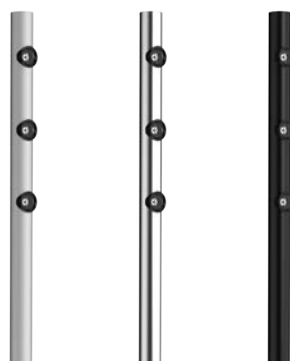DIVA-U




Colours

Haze Chrome Black

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
 2468.103A	3.2W / 3.4W	350 mA	270 lm / 228 lm	20° (Lens)	3000K	90+
 2468.103B	3.2W / 3.4W	350 mA	270 lm / 228 lm	20° (Lens)	3000K	90+

IP20

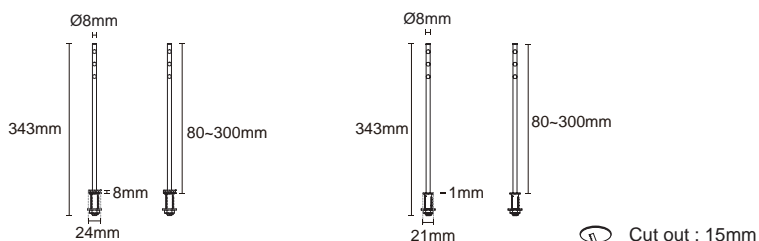

DIVA Adjustable

DIVA-A




Colours

Haze Chrome Black

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2468.112	2.8W / -	300 mA	231 lm / -	20° (Lens)	3000K	90+

IP20



Cut out : 25mm

DIVA Adjustable

DIVA-A1




Colours

Haze Chrome Black

Article number	LED / Fixture Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
 2568.112B	2.8W / -	300 mA	231 lm / -	20° (Lens)	3000K	90+


IP20



Cut out : 15mm

Wiring diagram




Downlight & Spotlight & Stem lights




recessed
or
plug in




C.C.

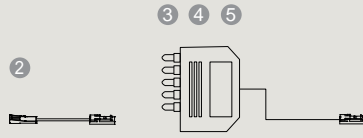



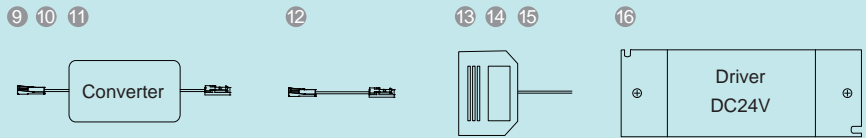




C.V.



Accessory

	<p>CS-TQ-37-60 Type: Connection for recessed</p>	<p>Quick connector cord Length : 2.37"(6cm)</p>
---	--	---

C.C Accessory (Constant Current)

	<p>CS-TOP3-37-150 Type: TOP junction box for recessed</p>	<p>3 way series connection cord Length : 6"(15.24cm)</p>		<p>CS-TD-37-100 Type: Driver connection for recessed and plug in</p>	<p>Driver connection cord Length : 3.94"(10cm)</p>
 	<p>CS-TOP6-37-150 CS-TOP3-37-150 Type: TOP junction box for plug in</p>	<p>6 way series connection cord 3 way series connection cord Length : 6"(15.24cm)</p>		<p>CS-TT-37-910 Type: Connection for recessed and plug in</p>	<p>Connection cord Length : 36"(91.44cm)</p>
	<p>LD-PI3536AF-EU LD-PI3536AF-AM Type: Driver Plug for plug in</p>	<p>I/P: 100-240V, O/P: 350mA/3-36VDC/max.8w CE/UL/CUL 3W x 1-2 pcs</p>			
	<p>RDSL20-500IL-UN Type: Driver for plug in</p>	<p>I/P: 100-277V, O/P: 350mA/5-40VDC/max.20w CE/ENEC/CCC/CUL 3W x 1-4 pcs</p>			

C.V Accessory (Constant Voltage)


	<p>EB-0088-300 Type: Converter for recessed</p>	<p>I/P: 24V, O/P: 300mA/max.3-9V</p>		<p>CS-TOP3-38-150 Type: TOP junction box for recessed</p>	<p>3 way parallel connection cord Length : 6"(15.24cm)</p>
	<p>EB-0088-350 Type: Converter for plug in</p>	<p>I/P: 24V, O/P: 350mA/max.3-9V</p>		<p>CS-TOP6-38-150 CS-TOP3-38-150 Type: TOP junction box for plug in</p>	<p>6 way parallel connection cord 3 way parallel connection cord Length : 6"(15.24cm)</p>
	<p>EB-0088-700 Type: Converter for recessed</p>	<p>I/P: 24V, O/P: 700mA/max.3-9V</p>		<p>AED15-24VLSTB-IP44 Type: Driver for recessed and plug in</p>	<p>I/P: 220-240V, O/P: 24VDC/max.15w CE/TUV/UKCA</p>
	<p>CS-TT-38-910 Type: Connection for recessed and plug in</p>	<p>Connection cord Length : 36"(91.44cm)</p>		<p>AED12-24VLSTB-UL Type: Driver for recessed and plug in</p>	<p>I/P: 120V, O/P: 24VDC/max.12w CE/CUL/FCC</p>

► Customize your modular setup


Adapting to various spaces, shapes, and sizes.

Module options


Flood module

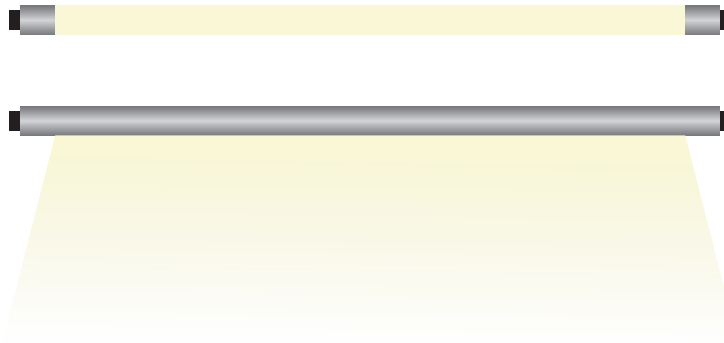




Dot module

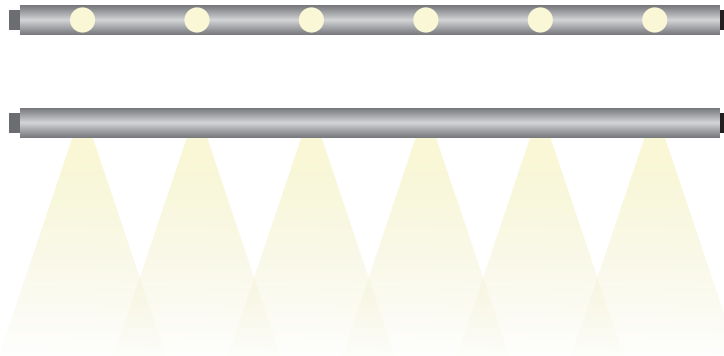

Configuration options : Goal Light

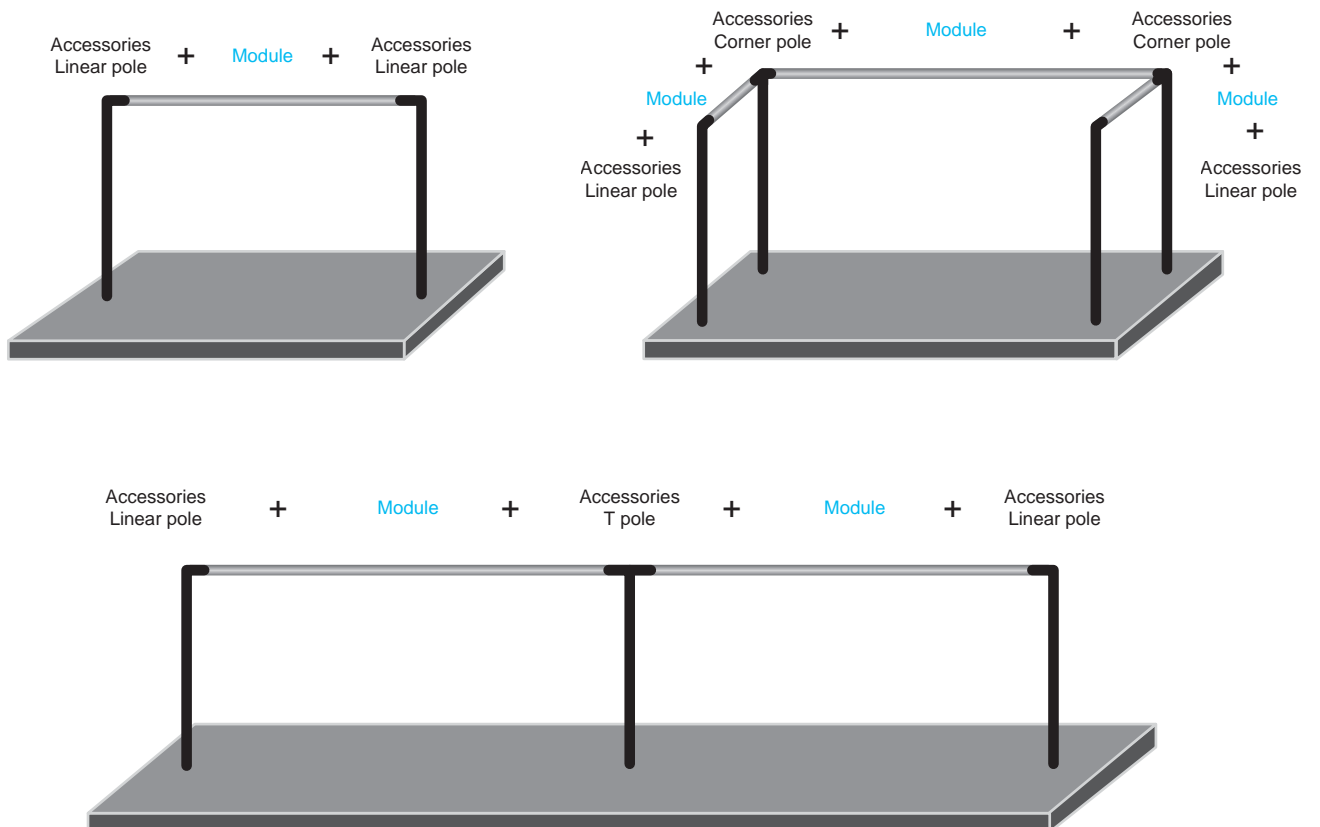



Configuration options : Linear Light

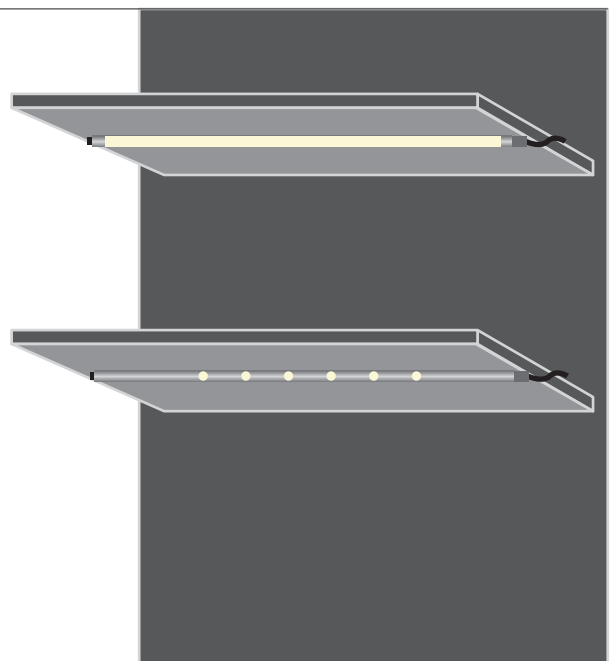

Goal Light

The DIVA-Goal line is a supremely lightweight, sleek, and flexible fixture. It injects innovation into the world of illumination without cumbersome installation procedures. It's easy to assemble and convenient to use two vertical poles and one horizontal bar. The horizontal bar can rotate 360 degrees and offer a variety of color temperatures to swiftly refresh your space design.

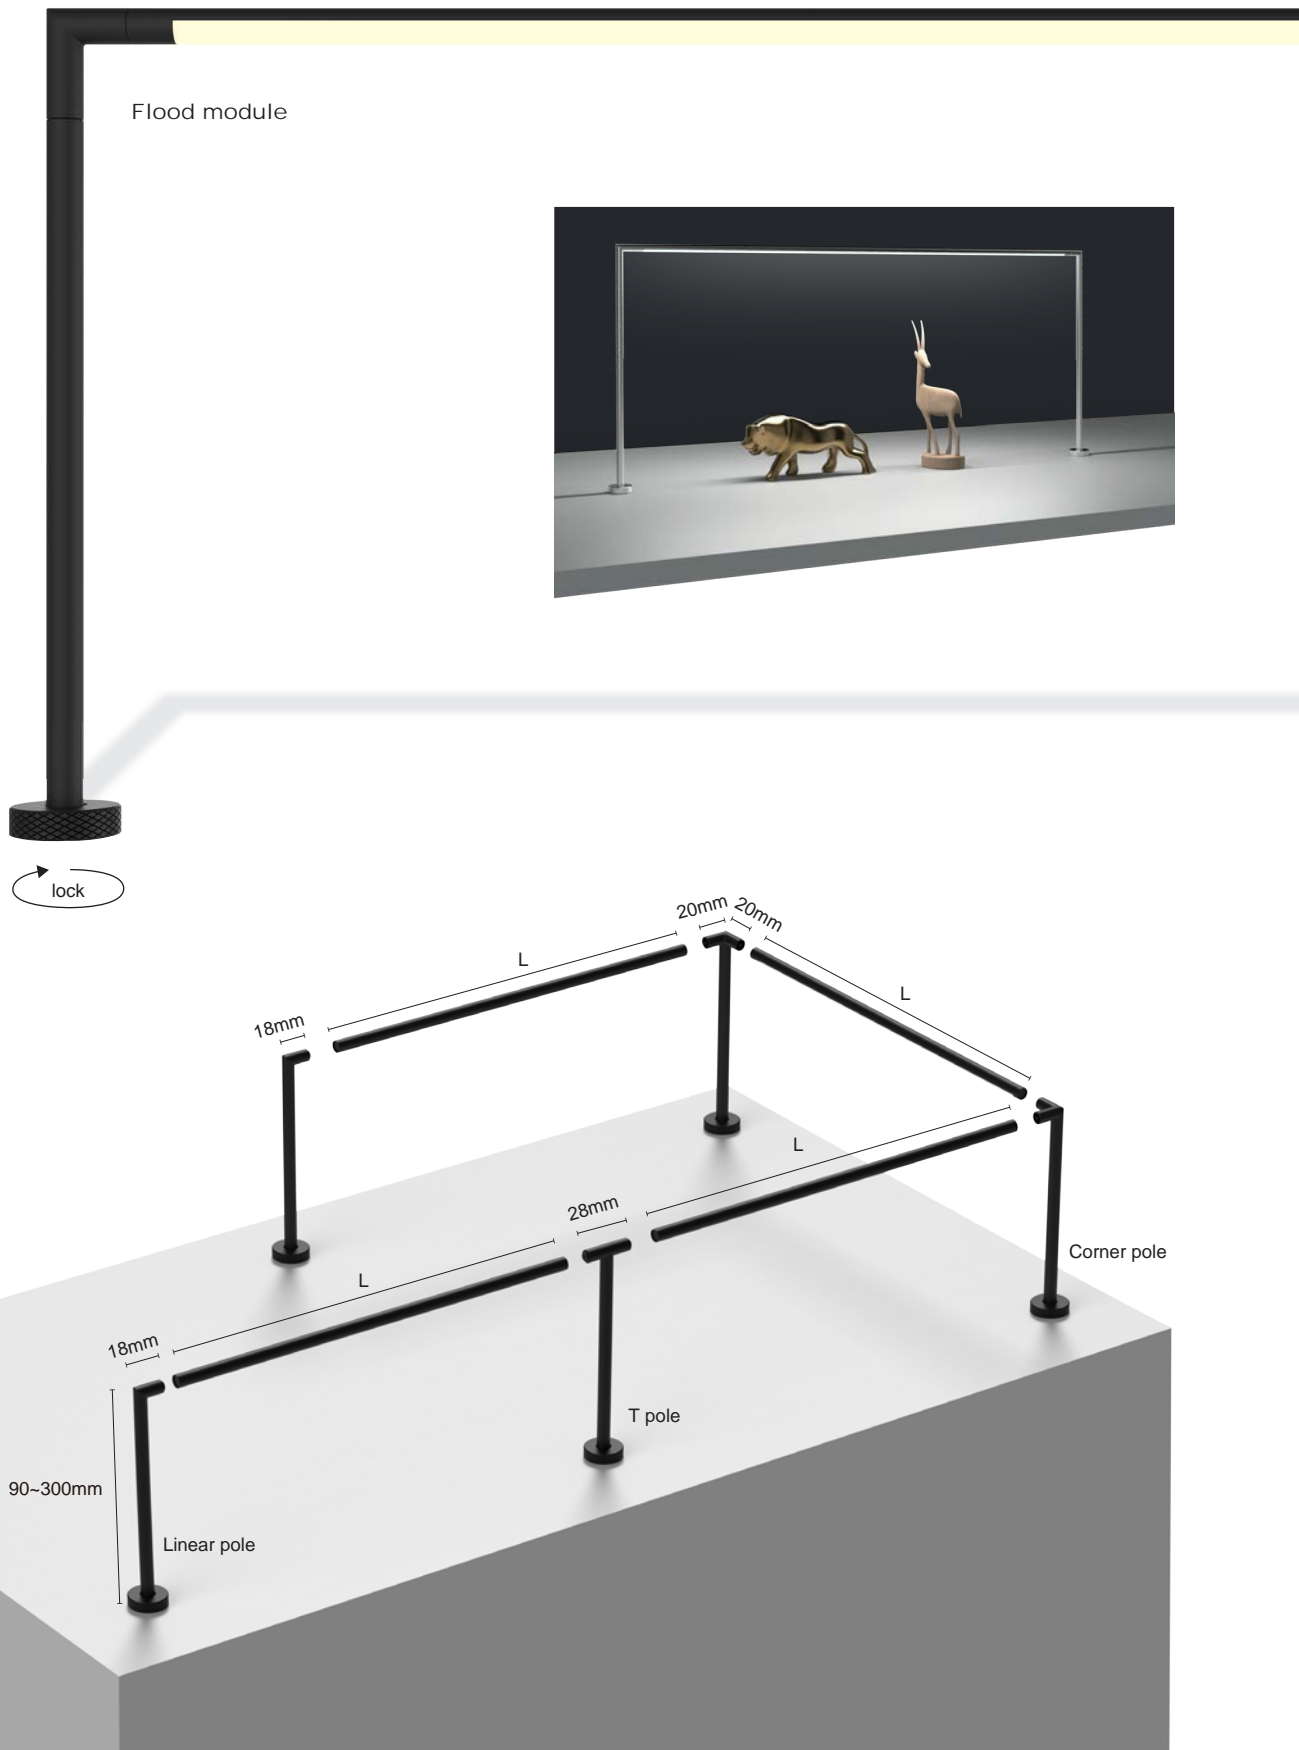

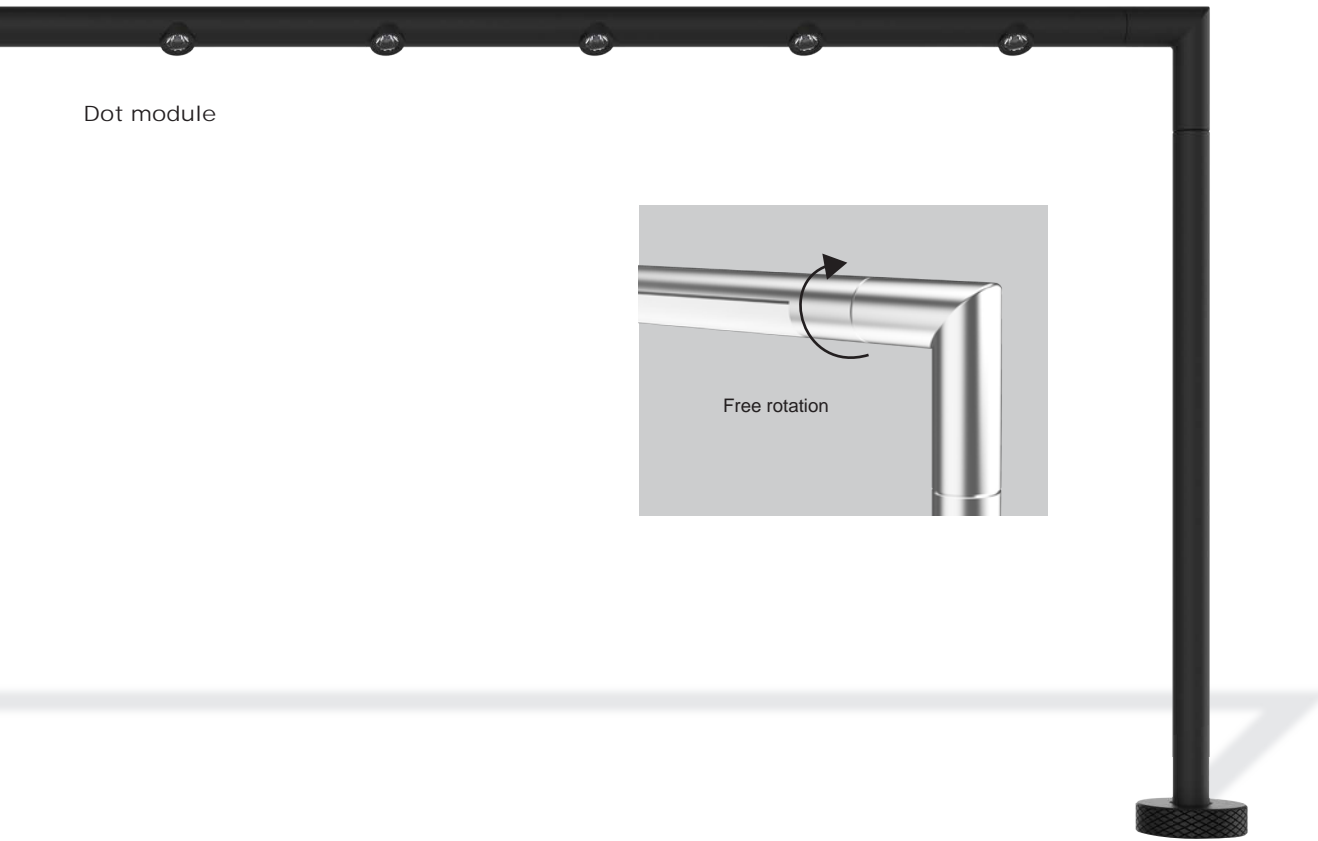


Dot module


Free rotation

Accessories - Poles


Ⓢ Cut out : 14mm

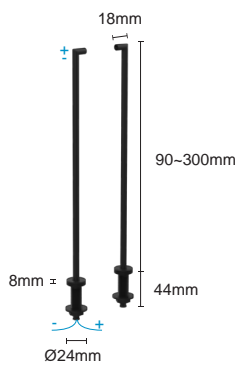

DIVA8-POLE-LA2-CV
DIVA8-POLE-LA2-CC
Linear pole

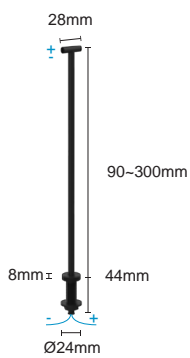

DIVA8-POLE-TA2-CV
DIVA8-POLE-TA2-CC
T pole

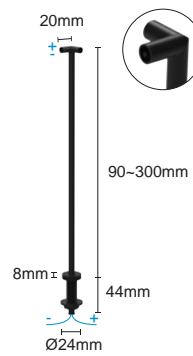

DIVA8-POLE-CA2-CV
DIVA8-POLE-CA2-CC
Corner pole

Linear Light

The best lighting solution for display shelves is designed to create a harmonious atmosphere and provide even light distribution, making it an ideal lighting choice.

Flood module

This is the ideal lighting choice for creating a harmonious atmosphere and ensuring even light distribution.





Dot module

It provides a balanced light effect with no shadow left under it. While simultaneously highlighting the most important subjects, this is the ideal solution for achieving accent lighting. The light cuts emphasize the details you want to bring out.



Accessories - Power cord




CP-39-200
Power cord
Length:200cm



Accessories - Chips



NS-0746
Clip (Included in fixture)



DIVA-II Flood

DIVA-II-F




Colours

Haze Black

Article number	Length (mm)	LED Consumption	Constant Voltage	LED / Delivered Lumen	Beam Angle	CCT	CRI
244							
2568.113A-1	61	0.5W	DC24V	62 lm / 48 lm	120°	3000K	90+
2568.113A-2	97.6	1W	DC24V	124 lm / 97 lm	120°	3000K	90+
2568.113A-3	134.2	1.5W	DC24V	186 lm / 146 lm	120°	3000K	90+
2568.113A-4	170.8	2W	DC24V	248 lm / 195 lm	120°	3000K	90+
2568.113A-5	207.4	2.5W	DC24V	311 lm / 244 lm	120°	3000K	90+
2568.113A	244	3W	DC24V	373 lm / 293 lm	120°	3000K	90+
544							
2568.113B-7	284.3	3.5W	DC24V	435 lm / 342 lm	120°	3000K	90+
2568.113B-8	321.4	4W	DC24V	497 lm / 391 lm	120°	3000K	90+
2568.113B-9	358.5	4.5W	DC24V	560 lm / 440 lm	120°	3000K	90+
2568.113B-10	395.6	5W	DC24V	622 lm / 489 lm	120°	3000K	90+
2568.113B-11	432.7	5.5W	DC24V	684 lm / 538 lm	120°	3000K	90+
2568.113B-12	469.8	6W	DC24V	746 lm / 587 lm	120°	3000K	90+
2568.113B-13	506.9	6.5W	DC24V	808 lm / 636 lm	120°	3000K	90+
2568.113B	544	7W	DC24V	871 lm / 684 lm	120°	3000K	90+
844							
2568.113C-15	582.9	7.5W	DC24V	933 lm / 733 lm	120°	3000K	90+
2568.113C-16	620.2	8W	DC24V	995 lm / 782 lm	120°	3000K	90+
2568.113C-17	657.5	8.5W	DC24V	1057 lm / 831 lm	120°	3000K	90+
2568.113C-18	694.8	9W	DC24V	1120 lm / 880 lm	120°	3000K	90+
2568.113C-19	732.1	9.5W	DC24V	1182 lm / 929 lm	120°	3000K	90+
2568.113C-20	769.4	10W	DC24V	1244 lm / 978 lm	120°	3000K	90+
2568.113C-21	806.7	10.5W	DC24V	1306 lm / 1027 lm	120°	3000K	90+
2568.113C	844	11W	DC24V	1368 lm / 1076 lm	120°	3000K	90+

IP20



Driver Accessory



AED15-24VLSTB-IP44
Type: Driver

I/P: 220-240V,
O/P: 24VDC/max.15w
CE/TUV/UKCA



AED12-24VLSTB-UL
Type: Driver

I/P: 120V,
O/P: 24V/max.12w
CE/CUL/FCC




Colours

Haze Black

Article number	Length (mm)	LED Consumption	Constant Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
6P							
2568.114A	244	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
2568.114A-1	321.4	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
2568.114A-2	395.6	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
2568.114A-3	469.8	4.8W	250 mA	486 lm / -- lm	20° (Lens)	3000K	90+
12P							
2568.114B	506.9	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
2568.114B-1	544	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
2568.114B-2	620.2	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
2568.114B-3	694.8	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
2568.114B-4	769.4	9.6W	500 mA	972 lm / -- lm	20° (Lens)	3000K	90+
18P							
2568.114C	769.4	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+
2568.114C-1	844	14.4W	750 mA	1458 lm / -- lm	20° (Lens)	3000K	90+

IP20



Accessory



EB-0088-250 for 6P
Type: Converter

I/P: 24Vdc
O/P: 250mA/max.18V



EB-0088-500 for 12P
Type: Converter

I/P: 24Vdc
O/P: 500mA/max.18V



EB-0088-750 for 18P
Type: Converter

I/P: 24Vdc
O/P: 750mA/max.18V



AED15-250ILS
Type: Driver

I/P: 100-240Vac,
O/P: 250mA/18-55V/13.5W
CE/CULIULNTUMSAA




AED15-500ILS
Type: Driver


I/P: 100-240Vac,
O/P: 500mA/12-35V/15W
CE/CULIULNTUMSAA



6P

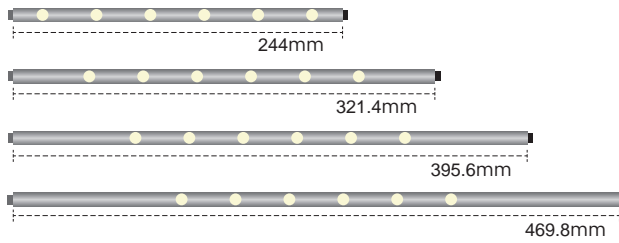

12P

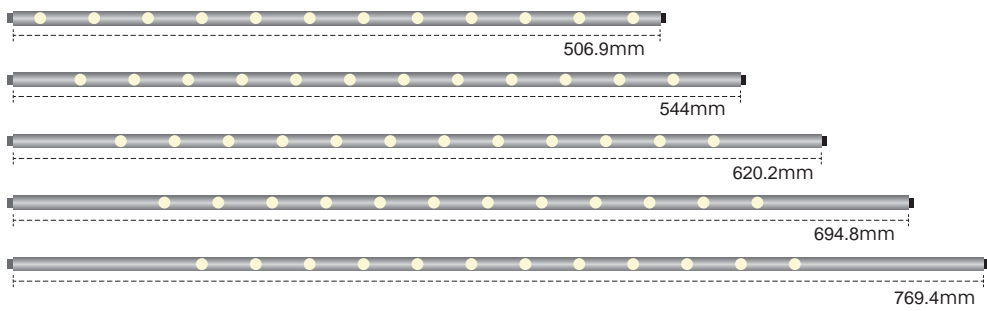

18P

