

## Luminaire Photograph



Light Output Ratio:	50.2%	
Luminaire Power:	8.55 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G06T0-C-83 Ra:90  
LENS: WT-25@12-15COBL4-Y1 15R  
DRIVER: LS-8-200LI1 EXC 200mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

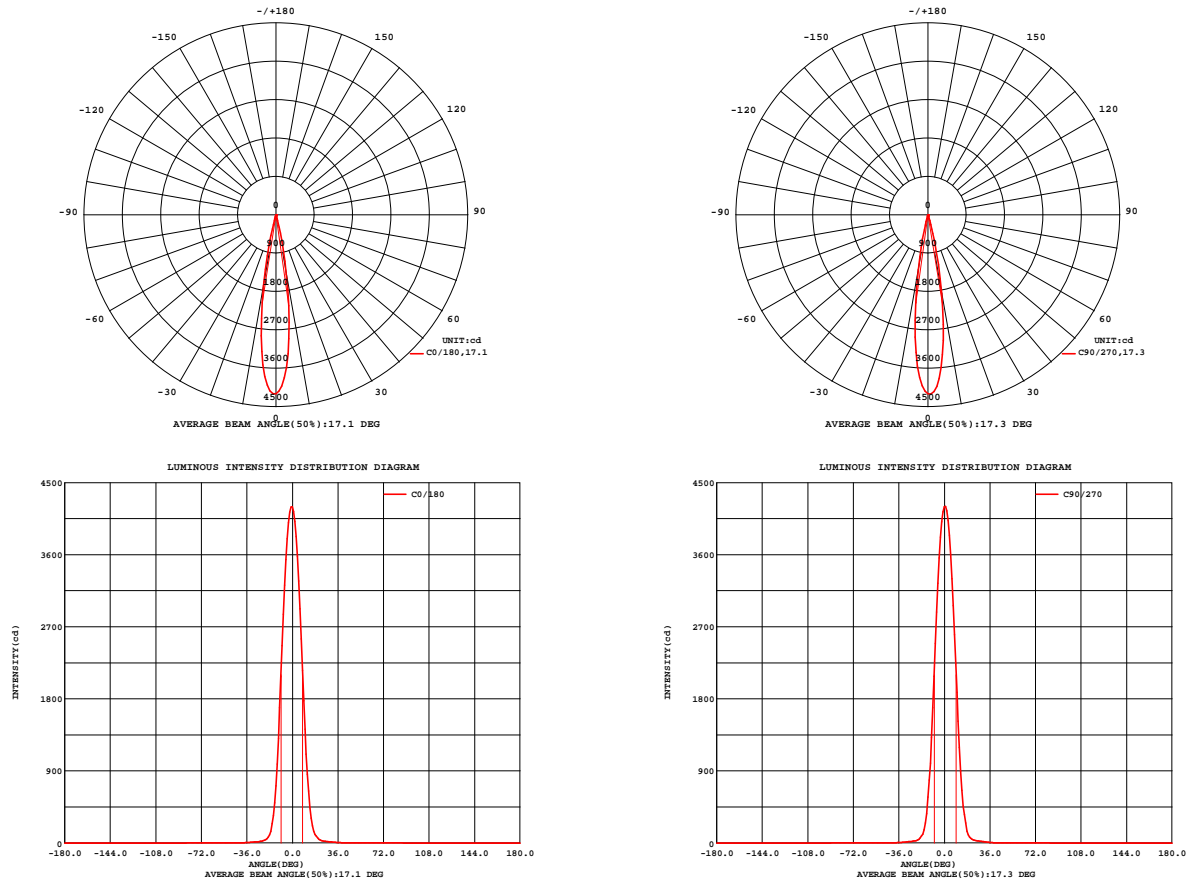


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30G06T0-C-83 Ra: 90  
LENS: WT-25@12-15COBL4-Y1 15R  
DRIVER: LS-8-200LI1 EXC 200mA  
30minutes warm-up


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz  
Lamp Flux:809.024x1 lm


NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.51 lm/W			
MODEL	Brideglux	Imax(cd)	4214	S/MH(C0/180)	0.29
NOMINAL POWER(W)	8	LOR(%)	50.2	S/MH(C90/270)	0.27
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	406.25	UP,DN(C0-180)	0.0,27.2
NOMINAL FLUX(lm)	809.024	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,23.1
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	down(%)	50.2	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

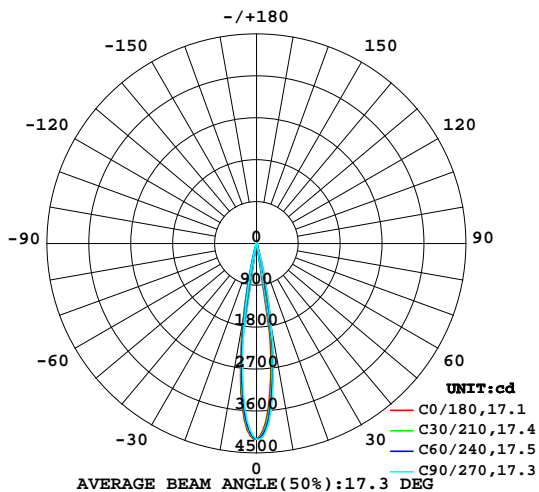

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

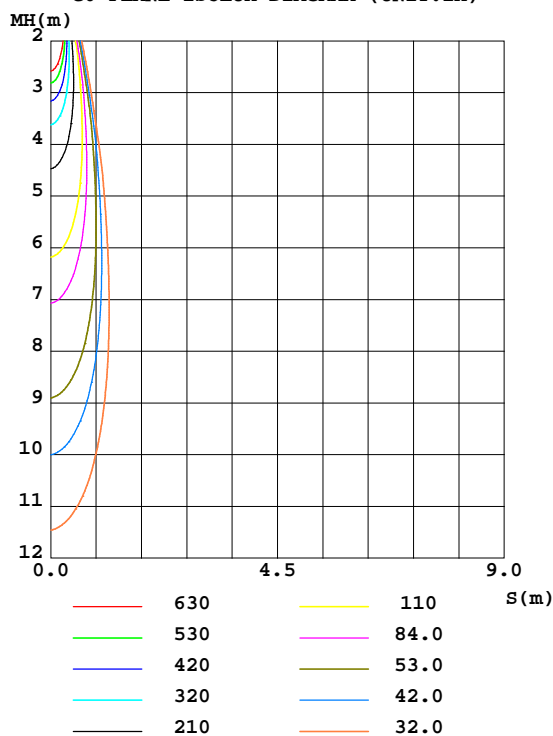

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1420	1742	1880	1834	1690	1482	1316	1253	0- 10	263.8	263.8	64.9,32.6
20	65.10	72.37	74.73	73.97	54.23	47.70	45.90	48.68	10- 20	124.3	388.1	95.5,48
30	14.09	16.94	19.40	17.51	12.01	11.74	12.48	13.30	20- 30	12.46	400.5	98.6,49.5
40	2.289	2.405	2.328	2.433	2.216	2.161	2.278	2.149	30- 40	4.579	405.1	99.7,50.1
50	0.2288	0.2193	0.2415	0.2615	0.2147	0.2238	0.2854	0.3192	40- 50	0.7951	405.9	99.9,50.2
60	0.1895	0.1823	0.1985	0.2173	0.1840	0.2162	0.2684	0.2326	50- 60	0.2102	406.1	100,50.2
70	0.0420	0.0392	0.0399	0.0468	0.0527	0.0538	0.0512	0.0438	60- 70	0.1294	406.2	100,50.2
80	0.0050	0.0005	0.0031	0.0025	0.0068	0.0034	0.0069	0.0020	70- 80	0.0208	406.2	100,50.2
90	0	0	0	0	0	0	0	0	80- 90	0.0007	406.2	100,50.2
100	0	0	0	0	0	0	0	0	90-100	0	406.2	100,50.2
110	0	0	0	0	0	0	0	0	100-110	0	406.2	100,50.2
120	0	0	0	0	0	0	0	0	110-120	0	406.2	100,50.2
130	0	0	0	0	0	0	0	0	120-130	0	406.2	100,50.2
140	0	0	0	0	0	0	0	0	130-140	0	406.2	100,50.2
150	0	0	0	0	0	0	0	0	140-150	0	406.2	100,50.2
160	0	0	0	0	0	0	0	0	150-160	0	406.2	100,50.2
170	0	0	0	0	0	0	0	0	160-170	0	406.2	100,50.2
180	0	0	0	0	0	0	0	0	170-180	0	406.2	100,50.2
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200Li1 EXC 200mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz  
Lamp Flux:809.024x1 lm

NAME: D55

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2504210245

MFR.: RISE

SUR.: 0.001074665m2

Shielding Angle:

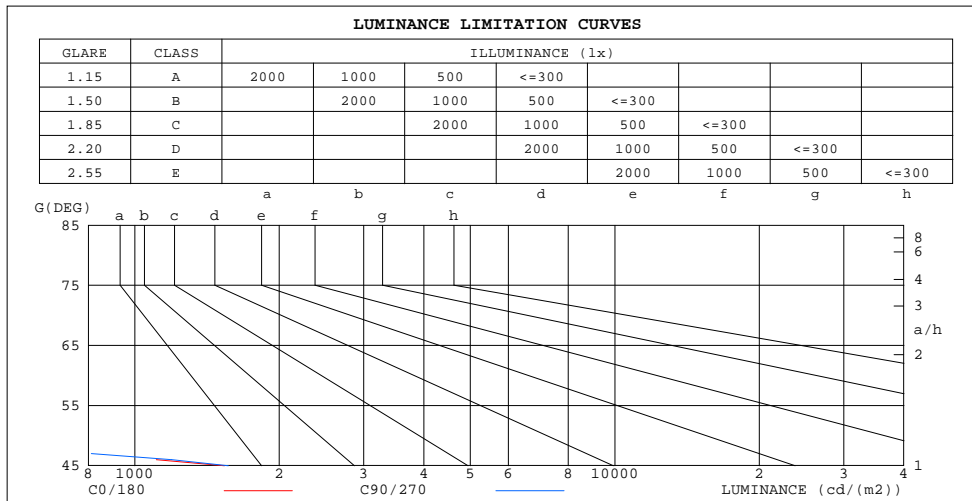

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	10	0
80	27	16
75	68	53
70	114	109
65	303	271
60	353	370
55	339	345
50	332	350
45	1538	1565

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz  
Lamp Flux:809.024x1 lm

NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

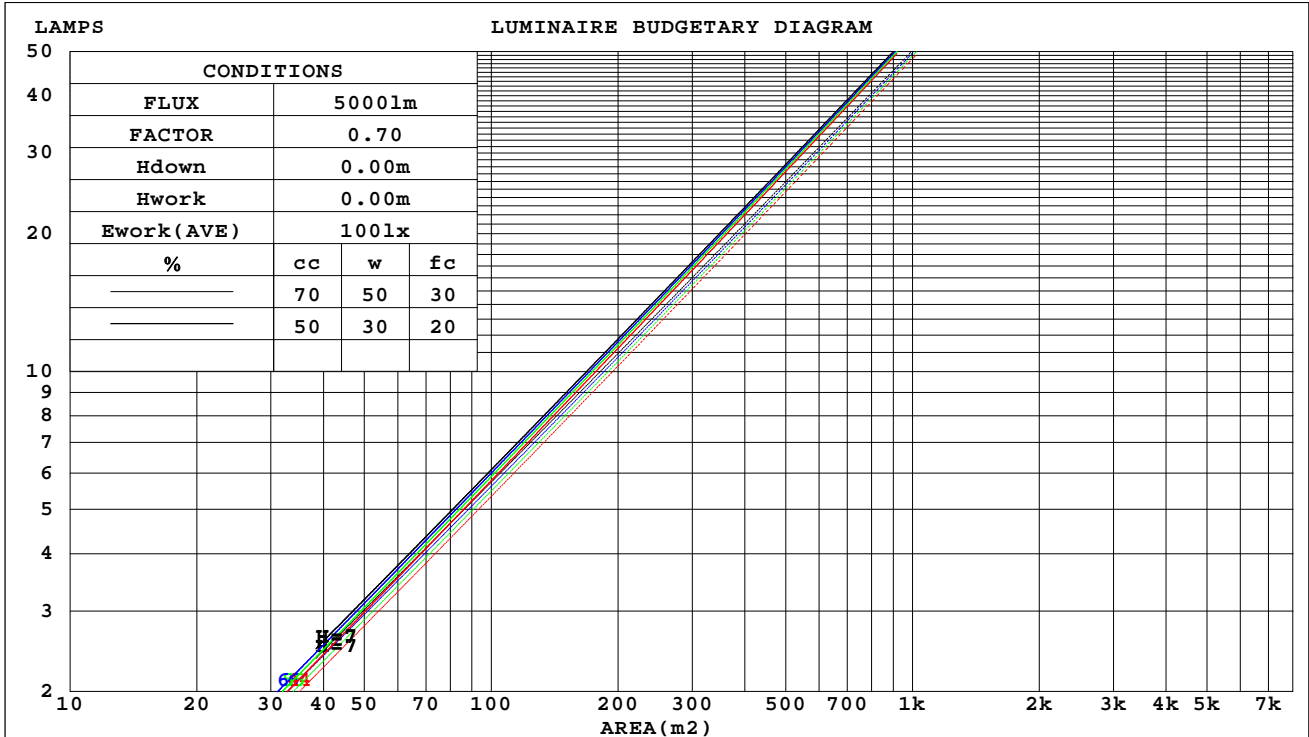

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.057	.032	.010	.053	.030	.010	.047	.027	.009	.042	.024	.008	.036	.021	.007	
2.0	.051	.028	.009	.049	.027	.008	.044	.024	.008	.039	.022	.007	.035	.020	.006	
3.0	.047	.025	.007	.045	.024	.007	.041	.022	.007	.037	.020	.006	.033	.018	.006	
4.0	.043	.022	.007	.041	.022	.006	.038	.020	.006	.035	.019	.006	.032	.017	.005	
5.0	.040	.020	.006	.038	.020	.006	.036	.019	.005	.033	.017	.005	.030	.016	.005	
6.0	.037	.019	.005	.036	.018	.005	.034	.017	.005	.031	.016	.005	.029	.015	.005	
7.0	.035	.017	.005	.034	.017	.005	.032	.016	.005	.030	.015	.004	.028	.015	.004	
8.0	.033	.016	.005	.032	.016	.004	.030	.015	.004	.029	.014	.004	.027	.014	.004	
9.0	.031	.015	.004	.030	.015	.004	.029	.014	.004	.027	.014	.004	.026	.013	.004	
10.0	.030	.014	.004	.029	.014	.004	.028	.013	.004	.026	.013	.004	.025	.013	.004	

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.096	.096	.096	.082	.082	.082	.056	.056	.056	.032	.032	.032	.010	.010	.010		
1.0	.084	.079	.075	.072	.068	.065	.049	.047	.045	.028	.027	.026	.009	.009	.008		
2.0	.074	.067	.061	.063	.057	.053	.043	.040	.037	.025	.023	.021	.008	.007	.007		
3.0	.065	.057	.050	.056	.049	.043	.039	.034	.030	.022	.020	.018	.007	.006	.006		
4.0	.059	.049	.042	.050	.042	.036	.035	.029	.025	.020	.017	.015	.006	.006	.005		
5.0	.053	.042	.035	.045	.037	.030	.031	.026	.021	.018	.015	.013	.006	.005	.004		
6.0	.048	.037	.030	.041	.032	.026	.028	.023	.018	.016	.013	.011	.005	.004	.004		
7.0	.043	.033	.026	.037	.029	.022	.026	.020	.016	.015	.012	.009	.005	.004	.003		
8.0	.040	.029	.022	.034	.025	.019	.024	.018	.014	.014	.011	.008	.004	.003	.003		
9.0	.037	.026	.019	.032	.023	.017	.022	.016	.012	.013	.009	.007	.004	.003	.002		
10.0	.034	.024	.017	.029	.021	.015	.020	.015	.011	.012	.009	.006	.004	.003	.002		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm											
NAME: D55					TYPE:			WEIGHT:			
SPEC.: 3000K					DIM.:			SERIAL No.: 2504210245			
MFR.: RISE					SUR.: 0.001074665m2			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	1.6	2.1	1.8	2.2	2.4	2.8	3.3	3.0	3.4	3.6
	3H	1.5	1.9	1.7	2.1	2.3	2.7	3.1	2.9	3.3	3.5
	4H	1.4	1.9	1.7	2.1	2.3	2.6	3.1	2.9	3.3	3.5
	6H	1.3	1.8	1.6	2.0	2.2	2.5	3.0	2.8	3.2	3.4
	8H	1.3	1.7	1.6	1.9	2.2	2.5	2.9	2.8	3.1	3.4
	12H	1.2	1.6	1.5	1.9	2.2	2.4	2.8	2.7	3.1	3.3
4H	2H	1.4	1.9	1.7	2.1	2.3	2.6	3.1	2.9	3.3	3.5
	3H	1.3	1.7	1.6	1.9	2.2	2.5	2.9	2.8	3.1	3.4
	4H	1.2	1.5	1.5	1.8	2.1	2.4	2.7	2.7	3.0	3.3
	6H	1.1	1.4	1.4	1.7	2.1	2.3	2.6	2.6	2.9	3.2
	8H	1.0	1.3	1.4	1.7	2.0	2.2	2.5	2.6	2.9	3.2
	12H	1.0	1.2	1.4	1.6	2.0	2.1	2.4	2.5	2.8	3.2
8H	4H	1.0	1.3	1.4	1.7	2.0	2.2	2.5	2.6	2.9	3.2
	6H	0.9	1.2	1.3	1.5	2.0	2.1	2.3	2.5	2.7	3.1
	8H	0.8	1.1	1.3	1.5	1.9	2.0	2.3	2.5	2.7	3.1
	12H	0.8	1.0	1.2	1.4	1.9	2.0	2.2	2.4	2.6	3.1
12H	4H	1.0	1.2	1.4	1.6	2.0	2.1	2.4	2.5	2.8	3.2
	6H	0.8	1.1	1.3	1.5	1.9	2.0	2.3	2.5	2.7	3.1
	8H	0.8	1.0	1.2	1.4	1.9	2.0	2.2	2.4	2.6	3.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 3.7 / - 9.5					+ 3.9 / - 9.8					
1.5H	+ 6.2 / -10.0					+ 6.4 / -10.1					
2.0H	+ 6.5 / - 3.7					+ 6.6 / - 3.6					

CIE Pub.117, 809.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)  
Area: 0.00107466 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	46	43	41	46	43	41	45	43	41	40
0.80	49	47	45	49	47	45	48	46	45	43
1.00	51	49	47	51	49	47	50	48	47	45
1.25	53	51	49	52	50	49	52	50	49	47
1.50	54	52	51	54	52	50	52	51	50	48
2.00	55	53	52	55	53	52	53	52	51	48
2.50	56	54	53	55	54	52	54	52	52	49
3.00	57	55	54	56	54	53	54	53	52	49
4.00	58	56	55	57	56	55	55	54	53	50
5.00	58	57	56	57	56	56	55	55	54	50
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

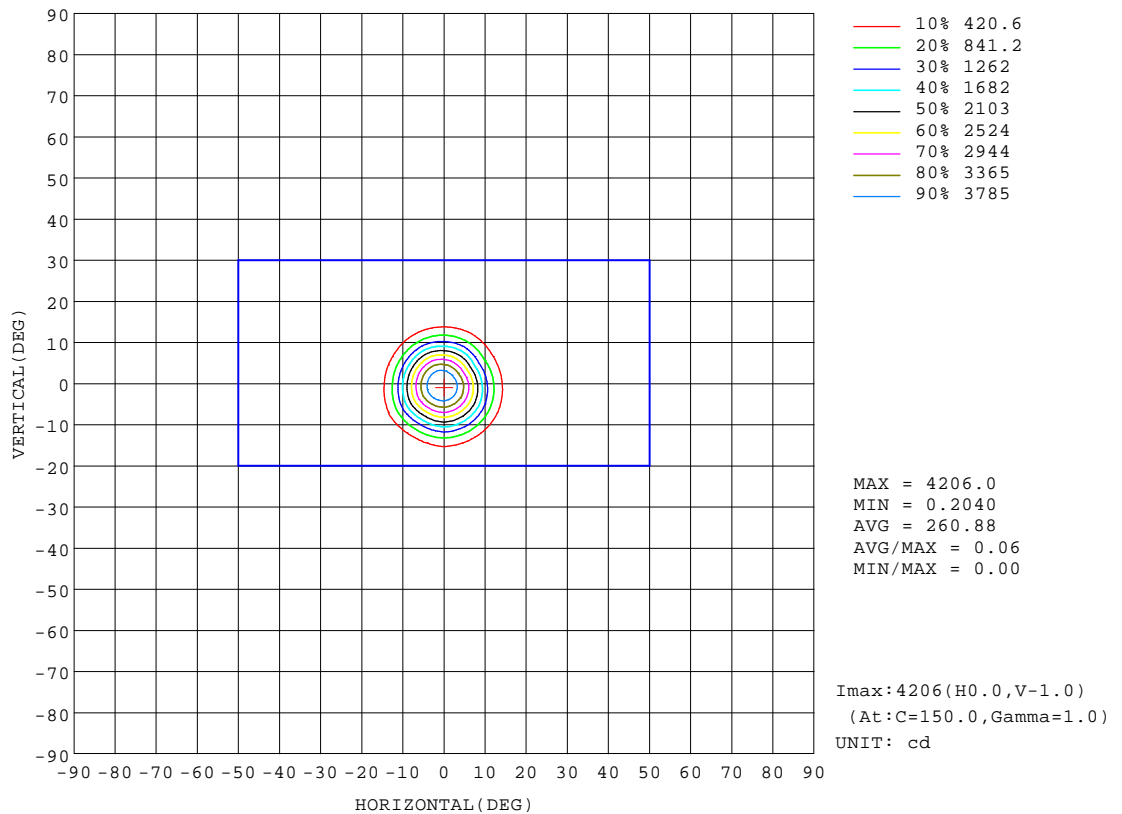


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## AAI Figure

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

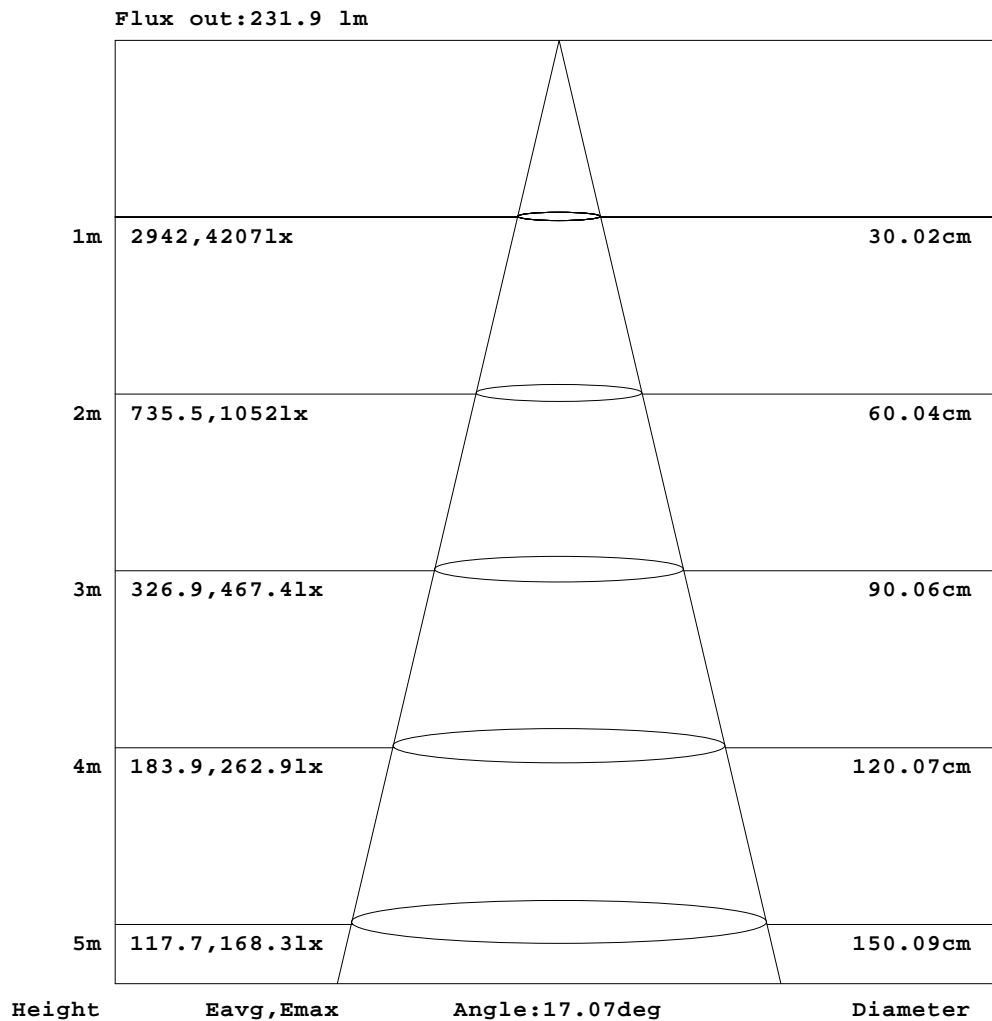


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

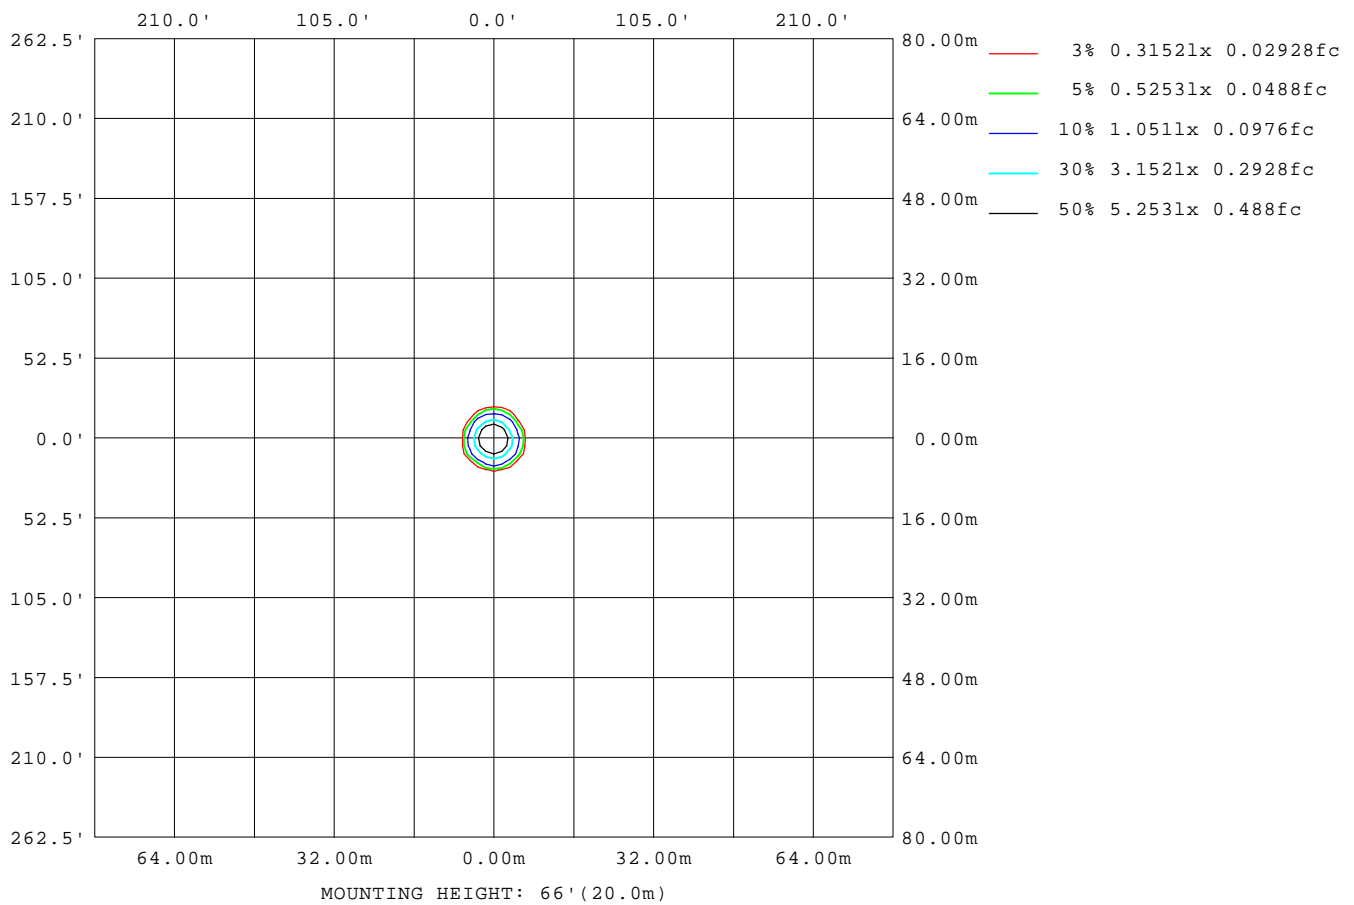

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	298
L_0~180(75)av	72
L_0~180(85)av	5
L_90~270(65)av	321
L_90~270(75)av	61
L_90~270(85)av	17
L_45(65)av	298
L_45(75)av	59
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up

## Planar Illuminance Curve

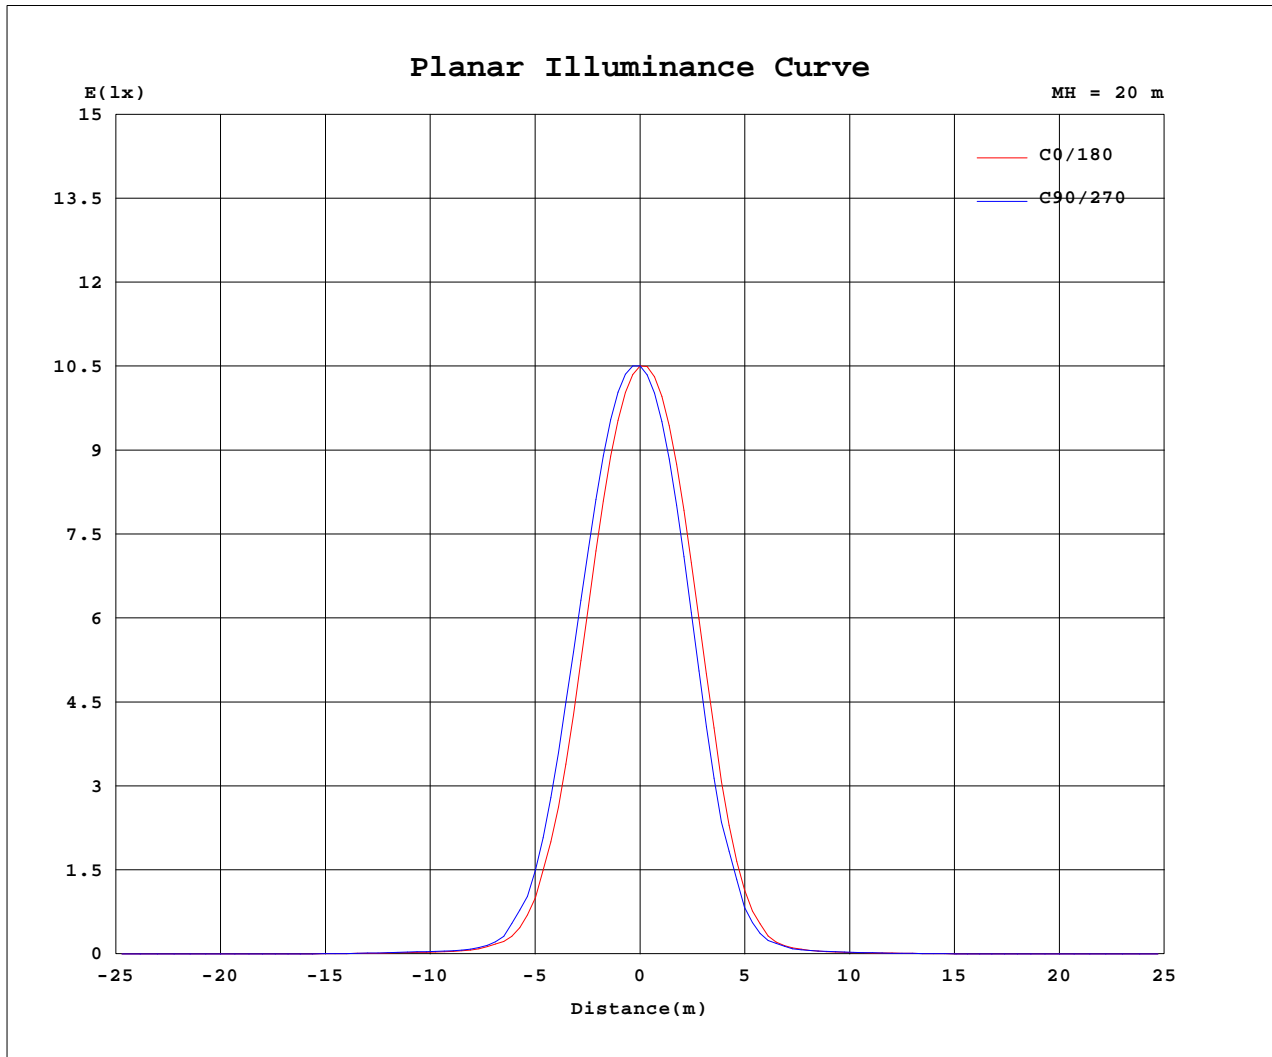

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-4-21

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30G06T0-C-83 Ra: 90  
 LENS: WT-25@12-15COBL4-Y1 15R  
 DRIVER: LS-8-200LI1 EXC 200mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.0403A P:8.5504W PF:0.9602 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210245
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	4198	4198	4198	4198	4198	4198	4198	4198	4198	4198	4198	4198						
5	3272	3422	3516	3597	3614	3639	3538	3445	3366	3242	3165	3115						
10	1420	1685	1799	1880	1784	1884	1690	1520	1444	1316	1306	1200						
15	310	394	425	458	395	451	342	284	307	250	302	242						
20	65.1	65.8	78.9	74.7	73.5	74.5	54.2	47.8	47.6	45.9	50.8	46.5						
25	23.6	24.6	28.1	28.7	27.3	28.0	21.3	18.8	21.5	21.8	23.9	22.2						
30	14.1	14.8	19.1	19.4	17.3	17.7	12.0	10.9	12.5	12.5	13.9	12.7						
35	7.02	7.63	8.41	8.02	7.59	8.50	6.29	5.70	5.99	5.82	6.28	5.86						
40	2.29	2.38	2.43	2.33	2.29	2.57	2.22	2.00	2.33	2.28	2.22	2.07						
45	1.17	1.29	1.13	1.19	1.20	1.26	0.89	0.84	1.02	1.18	1.03	0.93						
50	0.23	0.21	0.23	0.24	0.30	0.23	0.21	0.22	0.23	0.29	0.38	0.26						
55	0.21	0.20	0.20	0.21	0.27	0.22	0.20	0.21	0.24	0.27	0.35	0.24						
60	0.19	0.18	0.18	0.20	0.22	0.21	0.18	0.20	0.23	0.27	0.25	0.21						
65	0.14	0.13	0.13	0.12	0.12	0.13	0.13	0.14	0.14	0.17	0.15	0.15						
70	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.06	0.05	0.05	0.04	0.04						
75	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.02						
80	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.00	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90  
LENS:WT-25@12-15COBL4-Y1 15R  
DRIVER:LS-8-200LI1 EXC 200mA  
30minutes warm-up