

Luminaire Photograph



Light Output Ratio:	82.1%	
Luminaire Power:	6.952 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-3-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
LENS: PM-1117B 36R
NOT DRIVER: 48V
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

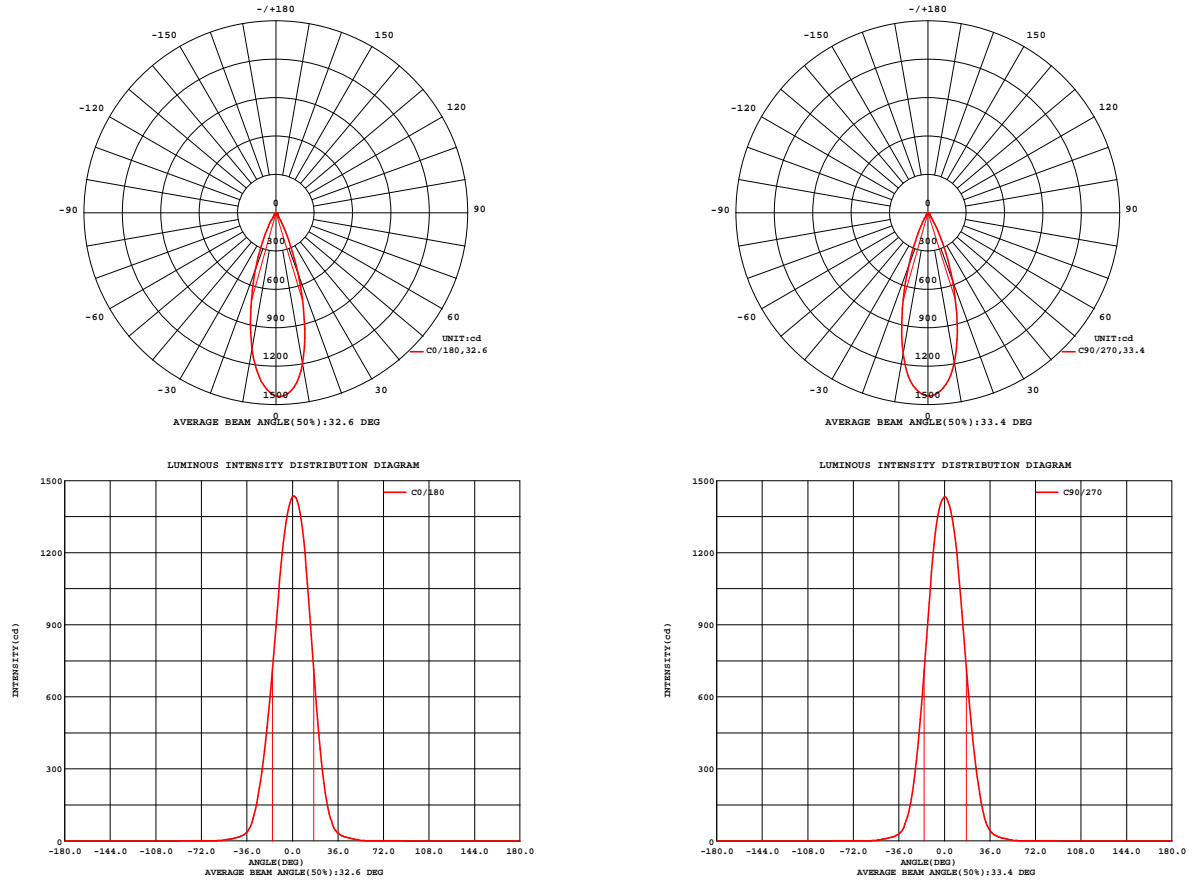


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
LENS: PM-1117B 36R
NOT DRIVER: 48V
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.24 lm/W			
MODEL	Brideglux	Imax(cd)	1437	S/MH(C0/180)	0.52
NOMINAL POWER(W)	7	LOR(%)	82.1	S/MH(C90/270)	0.52
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	509.18	η UP,DN(C0-180)	0.0,43.3
NOMINAL FLUX(lm)	620.3	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,38.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	48	η down(%)	82.1	CIBSE SHR MAX	0.55

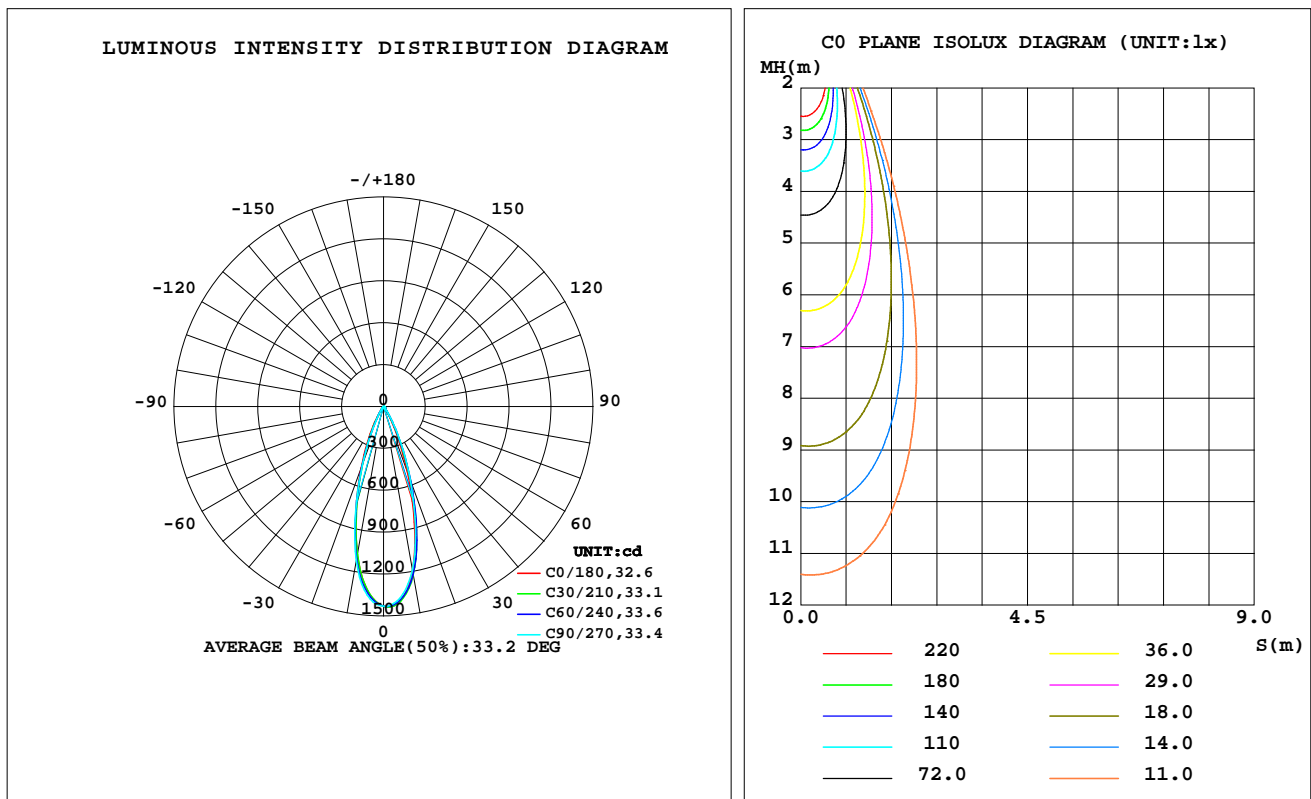

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1196	1224	1191	1120	1082	1093	1121	1176	0- 10	123.3	123.3	24.2,19.9
20	504.4	571.6	563.1	496.7	470.5	446.6	444.2	479.8	10- 20	223.6	346.9	68.1,55.9
30	94.82	122.7	135.9	122.0	111.3	92.67	85.81	87.27	20- 30	119.0	465.9	91.5,75.1
40	20.33	22.36	24.02	23.21	21.59	19.04	17.97	19.31	30- 40	30.16	496.1	97.4,80
50	6.566	7.004	7.390	7.500	7.291	6.607	6.183	6.352	40- 50	9.892	506.0	99.4,81.6
60	1.011	1.028	1.122	1.253	1.194	1.018	0.8869	0.9576	50- 60	2.670	508.6	99.9,82
70	0.0733	0.1106	0.1090	0.1425	0.1351	0.0980	0.0544	0.0723	60- 70	0.4946	509.1	100,82.1
80	0.0137	0.0096	0.0164	0.0125	0.0145	0.0090	0.0152	0.0097	70- 80	0.0288	509.2	100,82.1
90	0	0	0	0	0	0	0	0	80- 90	0.0056	509.2	100,82.1
100	0	0	0	0	0	0	0	0	90-100	0	509.2	100,82.1
110	0	0	0	0	0	0	0	0	100-110	0	509.2	100,82.1
120	0	0	0	0	0	0	0	0	110-120	0	509.2	100,82.1
130	0	0	0	0	0	0	0	0	120-130	0	509.2	100,82.1
140	0	0	0	0	0	0	0	0	130-140	0	509.2	100,82.1
150	0	0	0	0	0	0	0	0	140-150	0	509.2	100,82.1
160	0	0	0	0	0	0	0	0	150-160	0	509.2	100,82.1
170	0	0	0	0	0	0	0	0	160-170	0	509.2	100,82.1
180	0	0	0	0	0	0	0	0	170-180	0	509.2	100,82.1
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz
Lamp Flux:620.3x1 lm

NAME: OZ48-SA-33

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2503010135

MFR.: RISE

SUR.: 0.000754385m2

Shielding Angle:

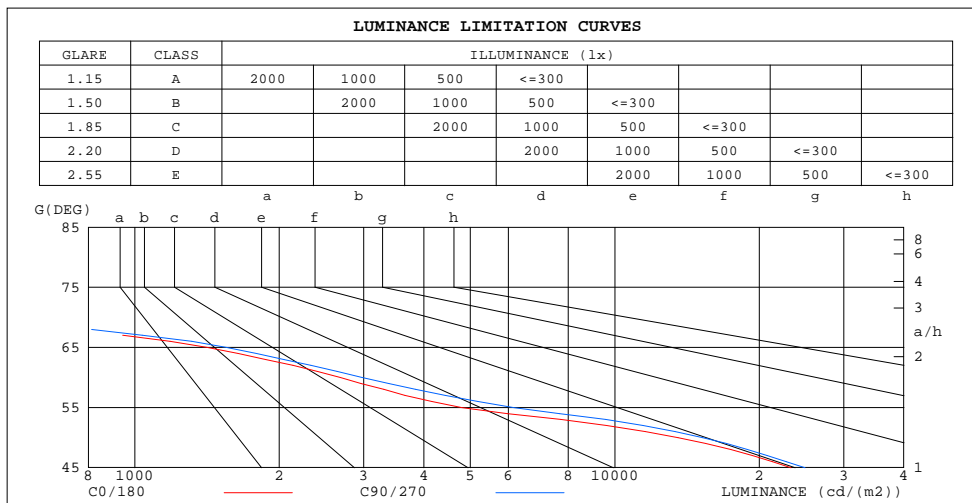

LUMINANCE cd/(m2)		
G(180)	G(270)	LUMINANCE
85	146	122
80	104	125
75	110	125
70	284	422
65	1415	1552
60	2678	2974
55	4798	6152
50	13533	15244
45	23299	24924


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

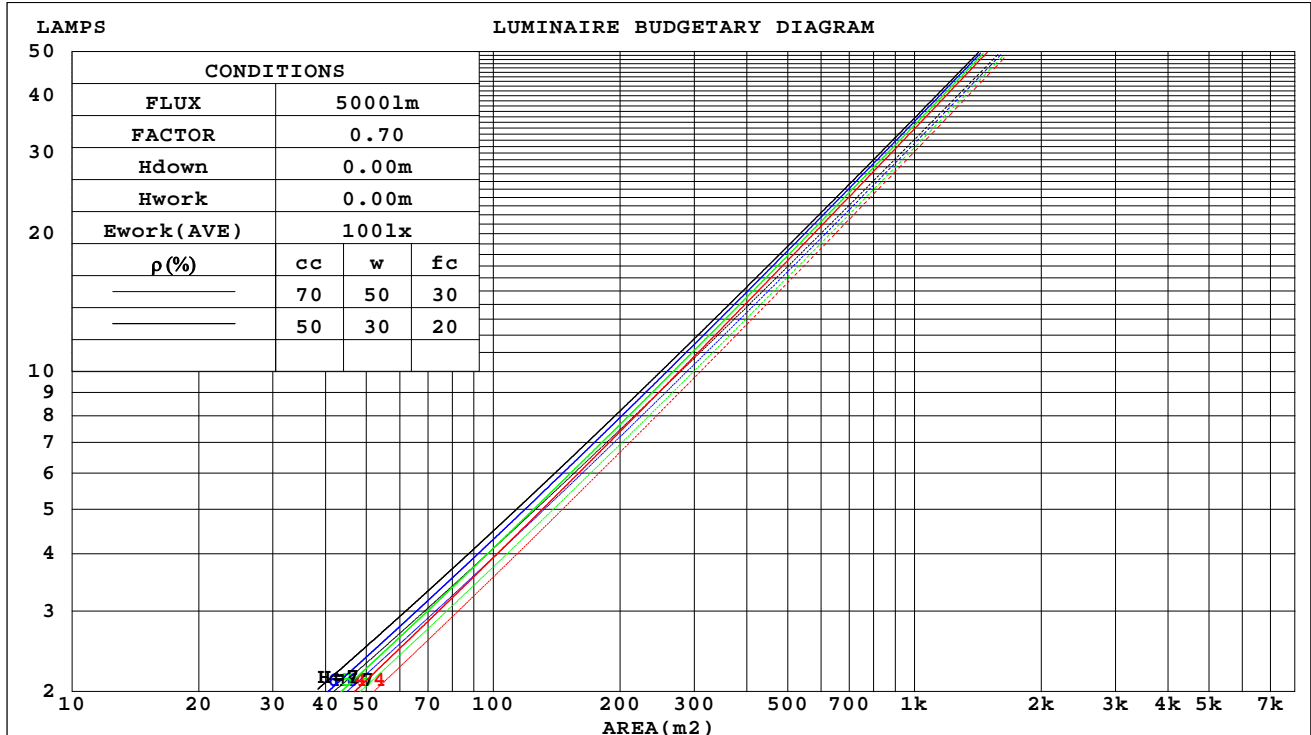

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

WEC AND CCEC

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.122	.069	.022	.117	.066	.021	.106	.061	.019	.097	.056	.018	.088	.051	.016	
2.0	.114	.063	.019	.110	.061	.019	.101	.056	.018	.094	.052	.016	.086	.049	.015	
3.0	.108	.057	.017	.104	.056	.017	.097	.052	.016	.090	.049	.015	.084	.046	.014	
4.0	.102	.053	.016	.098	.051	.015	.092	.049	.015	.087	.047	.014	.081	.044	.013	
5.0	.096	.049	.014	.093	.048	.014	.088	.046	.014	.083	.044	.013	.079	.042	.013	
6.0	.092	.046	.013	.089	.045	.013	.085	.043	.013	.080	.042	.012	.076	.040	.012	
7.0	.087	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012	.074	.038	.011	
8.0	.083	.041	.011	.082	.040	.011	.078	.039	.011	.075	.038	.011	.072	.037	.011	
9.0	.080	.039	.011	.078	.038	.011	.075	.037	.011	.072	.036	.010	.070	.035	.010	
10.0	.077	.037	.010	.075	.036	.010	.073	.036	.010	.070	.035	.010	.067	.034	.010	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.156	.156	.156	.134	.134	.134	.091	.091	.091	.052	.052	.052	.017	.017	.017		
1.0	.139	.129	.121	.119	.111	.104	.081	.076	.072	.047	.044	.042	.015	.014	.014		
2.0	.125	.109	.096	.107	.094	.083	.073	.065	.058	.042	.038	.034	.014	.012	.011		
3.0	.113	.093	.077	.097	.080	.067	.067	.056	.047	.038	.033	.028	.012	.011	.009		
4.0	.103	.081	.063	.089	.070	.055	.061	.049	.039	.035	.028	.023	.011	.009	.008		
5.0	.095	.071	.053	.082	.061	.046	.056	.043	.032	.033	.025	.019	.011	.008	.006		
6.0	.088	.063	.044	.076	.054	.038	.052	.038	.027	.030	.022	.016	.010	.007	.005		
7.0	.082	.056	.038	.071	.049	.033	.049	.034	.023	.028	.020	.014	.009	.007	.005		
8.0	.077	.051	.032	.067	.044	.028	.046	.031	.020	.027	.018	.012	.009	.006	.004		
9.0	.073	.046	.028	.063	.040	.025	.044	.028	.017	.025	.017	.010	.008	.005	.003		
10.0	.069	.042	.025	.060	.037	.022	.041	.026	.015	.024	.015	.009	.008	.005	.003		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm										
NAME: OZ48-SA-33					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2503010135		
MFR.: RISE					SUR.: 0.000754385m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.1	16.6	17.2	17.4	17.6	18.3	17.8	18.5	18.6
3H	16.2	16.9	16.4	17.1	17.3	17.4	18.1	17.7	18.3	18.5
4H	16.1	16.8	16.4	17.0	17.2	17.3	18.0	17.6	18.2	18.4
6H	16.0	16.6	16.3	16.9	17.1	17.3	17.9	17.5	18.1	18.3
8H	16.0	16.6	16.3	16.8	17.1	17.2	17.8	17.5	18.0	18.3
12H	15.9	16.5	16.3	16.8	17.0	17.2	17.7	17.5	18.0	18.3
4H 2H	16.1	16.8	16.4	17.0	17.2	17.4	18.0	17.6	18.2	18.4
3H	16.0	16.5	16.3	16.8	17.1	17.2	17.7	17.5	18.0	18.3
4H	15.9	16.4	16.2	16.7	17.0	17.1	17.6	17.4	17.9	18.2
6H	15.8	16.2	16.1	16.6	16.9	17.0	17.4	17.4	17.8	18.1
8H	15.7	16.1	16.1	16.5	16.9	16.9	17.4	17.3	17.7	18.1
12H	15.7	16.1	16.1	16.4	16.8	16.9	17.3	17.3	17.6	18.0
8H 4H	15.7	16.1	16.1	16.5	16.9	16.9	17.4	17.3	17.7	18.1
6H	15.6	16.0	16.0	16.3	16.8	16.8	17.2	17.2	17.6	18.0
8H	15.5	15.9	16.0	16.3	16.7	16.8	17.1	17.2	17.5	17.9
12H	15.5	15.8	16.0	16.2	16.7	16.7	17.0	17.2	17.4	17.9
12H 4H	15.7	16.1	16.1	16.4	16.8	16.9	17.3	17.3	17.6	18.0
6H	15.5	15.9	16.0	16.3	16.7	16.8	17.1	17.2	17.5	17.9
8H	15.5	15.8	16.0	16.2	16.7	16.7	17.0	17.2	17.4	17.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / -10.5					+ 3.4 / -10.5				
1.5H	+ 4.0 / - 8.2					+ 4.8 / - 8.5				
2.0H	+ 5.7 / - 9.7					+ 5.7 / -10.1				

CIE Pub.117, 620.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)
Area: 0.000754385 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	74	69	66	73	69	66	73	69	66	63
0.80	80	75	72	79	75	72	78	75	72	69
1.00	83	79	76	82	78	76	81	78	75	72
1.25	86	82	79	85	82	79	84	81	78	75
1.50	88	84	82	87	84	82	85	83	81	77
2.00	90	87	84	89	86	84	87	84	82	78
2.50	91	88	86	90	87	85	87	85	84	79
3.00	92	90	88	91	89	87	88	86	85	80
4.00	94	92	90	92	90	89	89	88	87	81
5.00	95	93	92	93	92	90	90	89	88	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

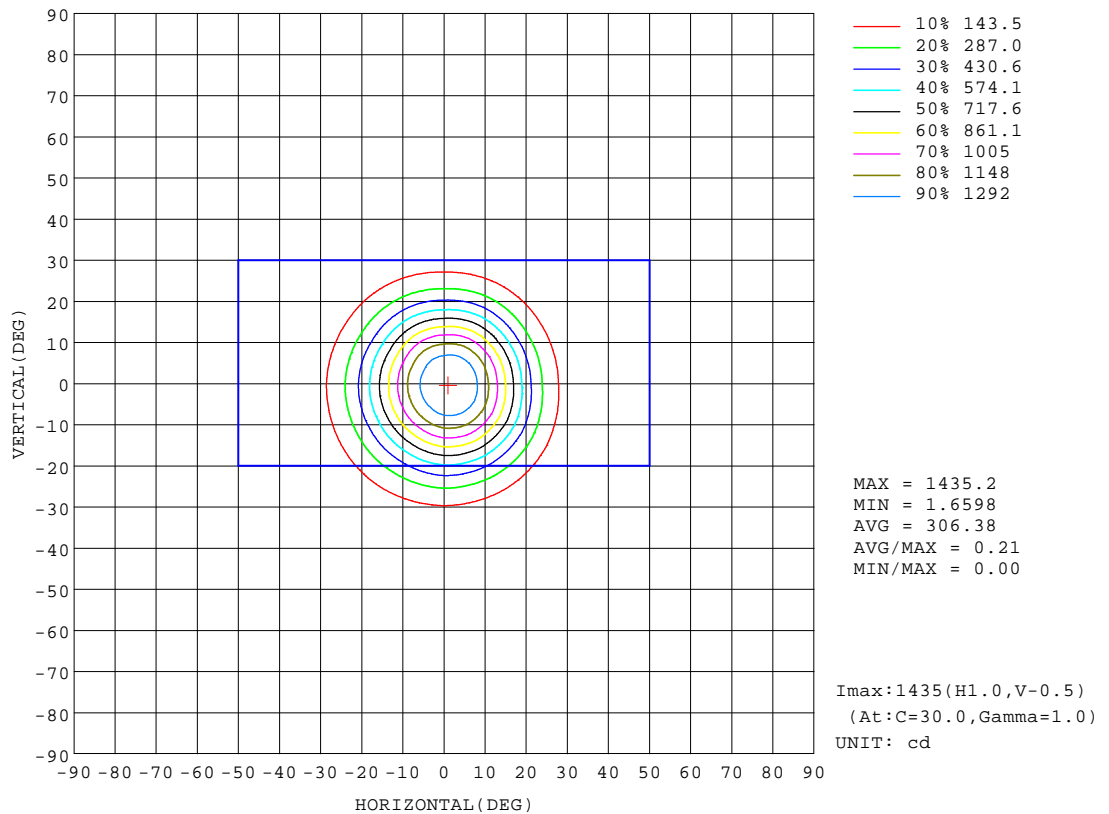


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

AAI Figure

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

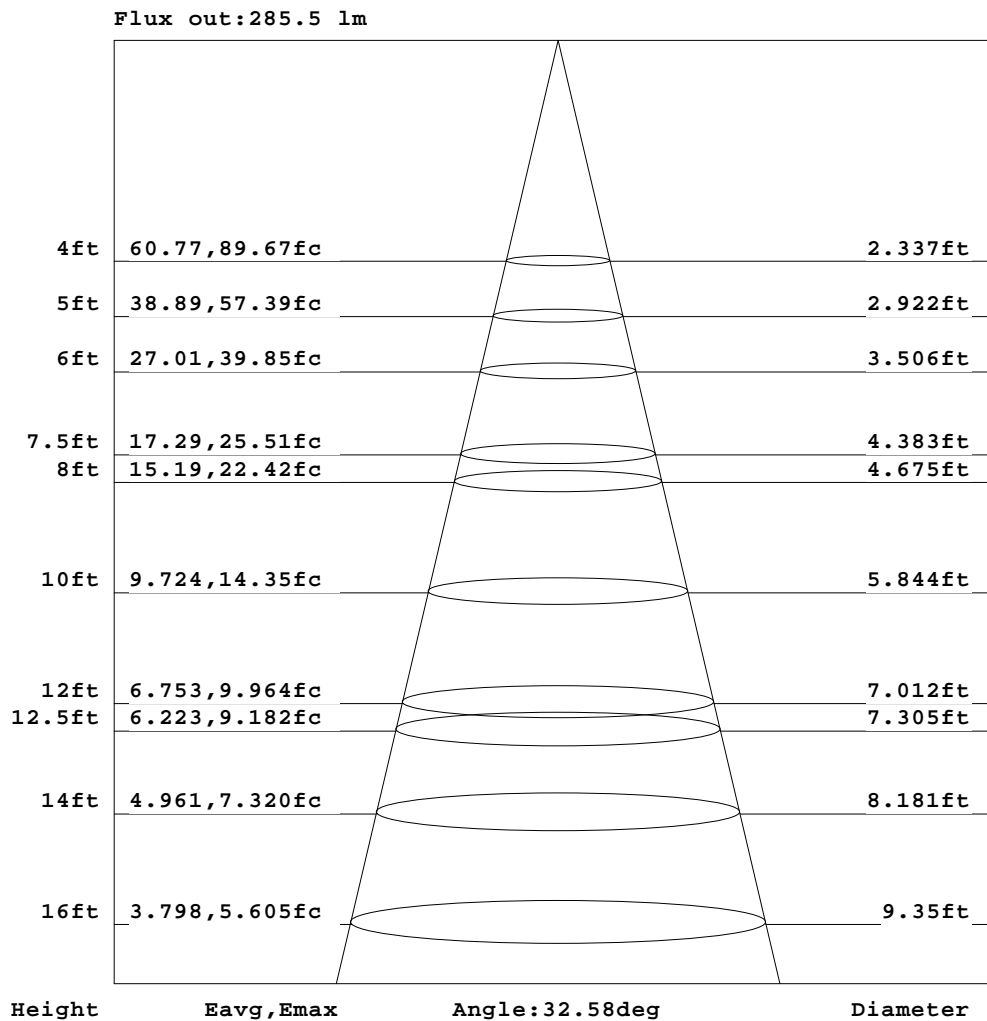


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

ISOLUX DIAGRAM

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

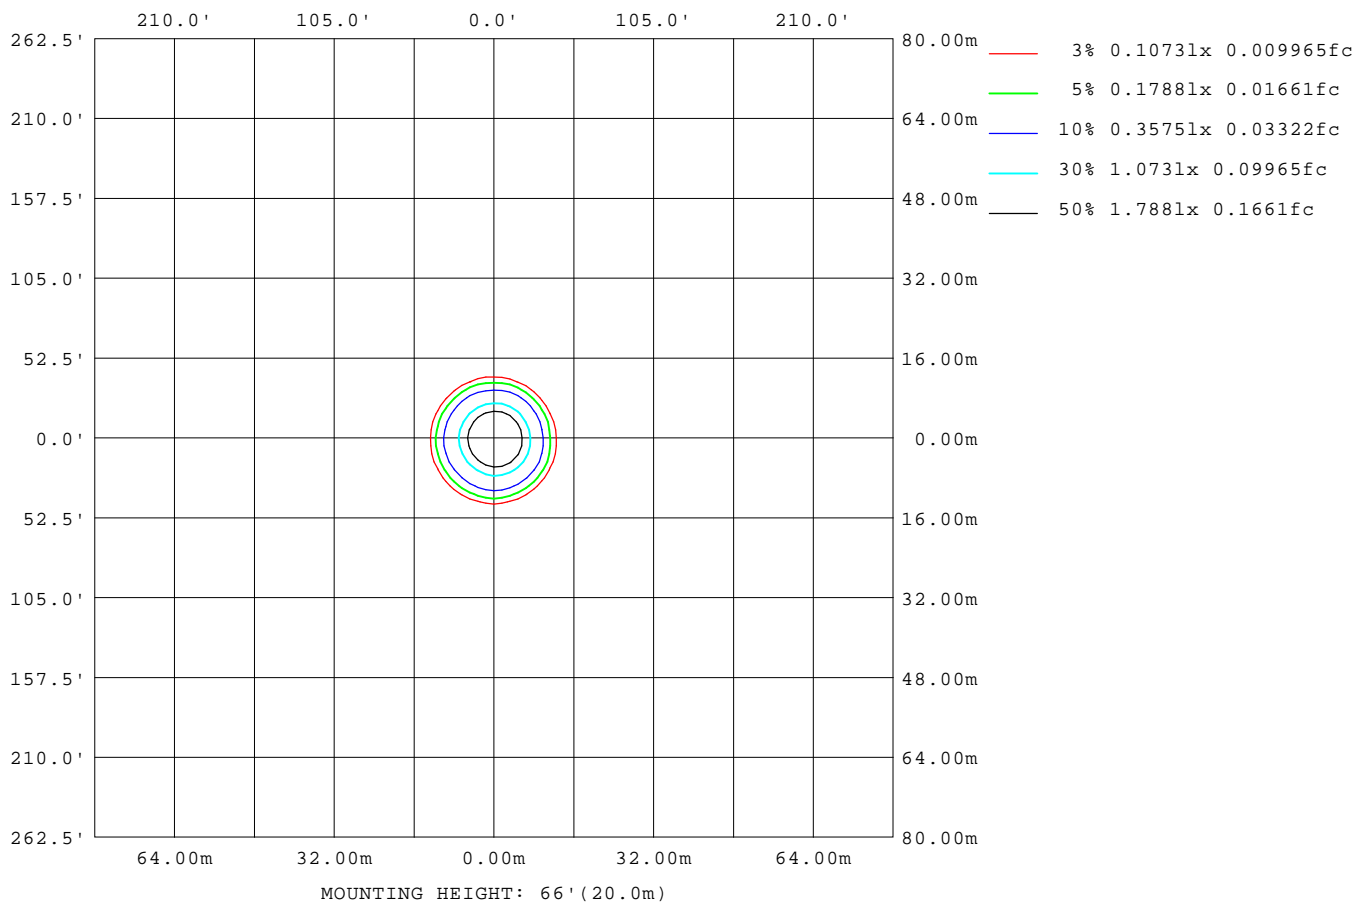

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

LED Avg.L Report

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1507
L_0~180(75)av	103
L_0~180(85)av	130
L_90~270(65)av	1401
L_90~270(75)av	111
L_90~270(85)av	118
L_45(65)av	1463
L_45(75)av	95
L_45(85)av	41

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up

Planar Illuminance Curve

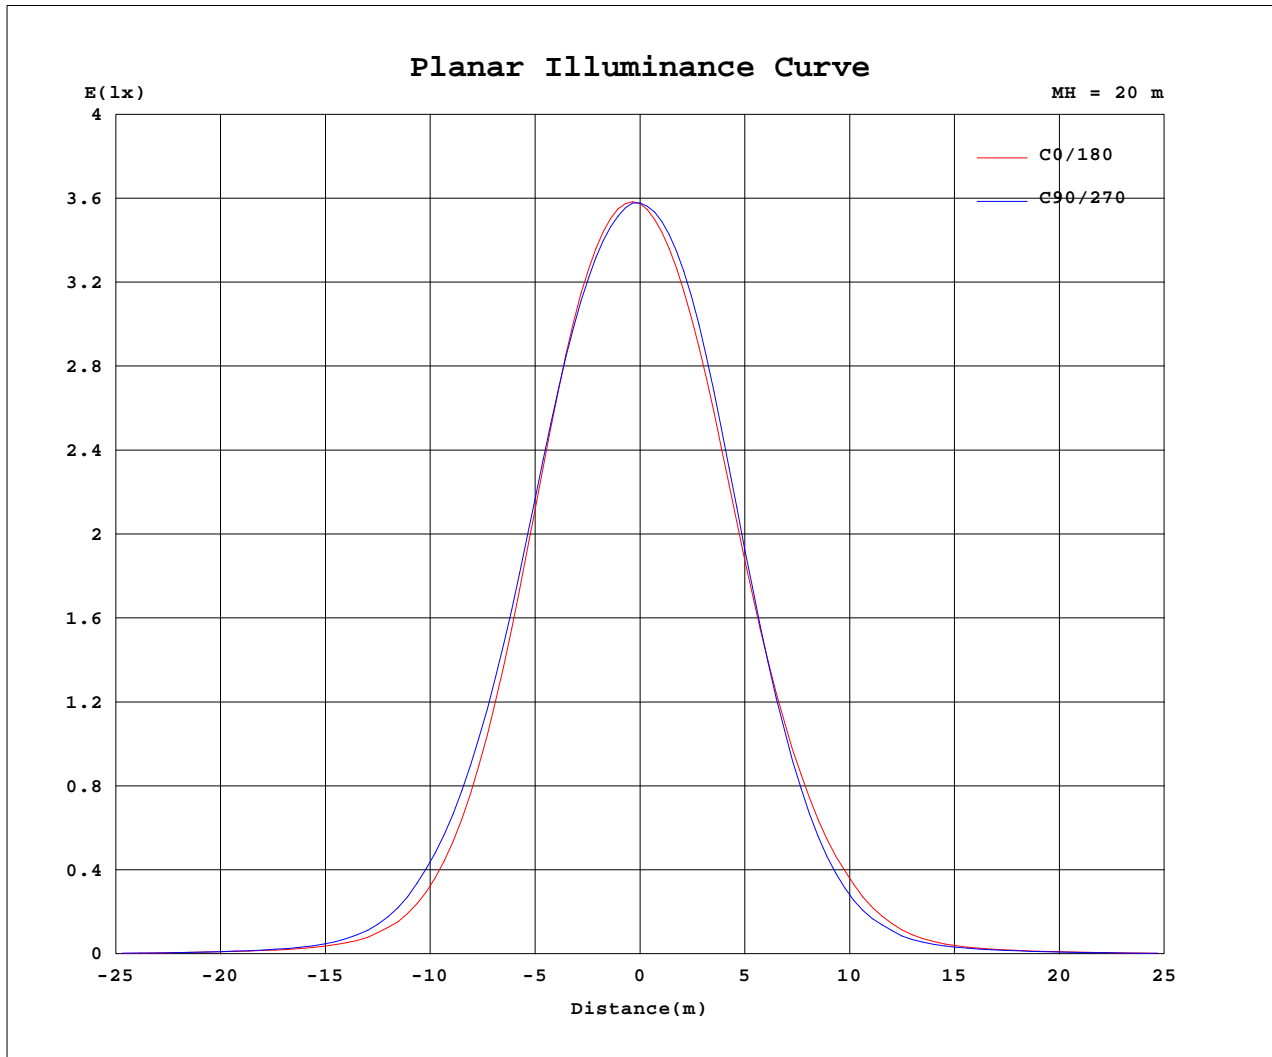

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-3-1

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
 LENS: PM-1117B 36R
 NOT DRIVER: 48V
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:47.846V I:0.1453A P:6.9521W PF:1.0000 Freq:0Hz Lamp Flux:620.3x1 lm		
NAME: OZ48-SA-33	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2503010135
MFR.: RISE	SUR.: 0.000754385m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1431	1431	1431	1431	1431	1431	1431	1431	1431	1431	1431	1431						
5	1393	1400	1390	1376	1347	1329	1323	1321	1339	1354	1376	1388						
10	1196	1226	1222	1191	1139	1100	1082	1078	1109	1121	1166	1185						
15	858	912	919	885	823	781	761	745	769	776	823	839						
20	504	565	578	563	511	482	471	444	449	444	478	482						
25	239	287	303	306	276	258	251	225	222	207	227	221						
30	94.8	117	129	136	127	117	111	95.8	89.6	85.8	86.9	87.7						
35	39.2	45.1	50.3	53.4	50.9	47.4	43.6	38.0	35.8	34.0	34.9	36.2						
40	20.3	21.6	23.1	24.0	23.6	22.8	21.6	19.1	19.0	18.0	19.2	19.4						
45	12.4	12.8	13.3	13.3	13.5	13.2	12.5	12.1	11.7	11.4	11.7	12.1						
50	6.57	6.89	7.12	7.39	7.49	7.51	7.29	6.79	6.43	6.18	6.32	6.38						
55	2.08	2.21	2.38	2.66	2.81	2.96	2.86	2.40	2.20	2.02	1.98	2.02						
60	1.01	1.02	1.04	1.12	1.22	1.29	1.19	1.05	0.99	0.89	0.93	0.98						
65	0.45	0.47	0.46	0.49	0.50	0.55	0.51	0.46	0.42	0.40	0.42	0.45						
70	0.07	0.11	0.11	0.11	0.13	0.15	0.14	0.10	0.09	0.05	0.08	0.07						
75	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
80	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01						
85	0.01	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-3-1

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-1117B 36R
NOT DRIVER:48V
30minutes warm-up