

### Luminaire Photograph



Light Output Ratio:	82.7%	
Luminaire Power:	11.75 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.60	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H1000-B-83 Ra: 95  
LENS: PM-1082B 36R  
NOT DRIVER: 48V  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

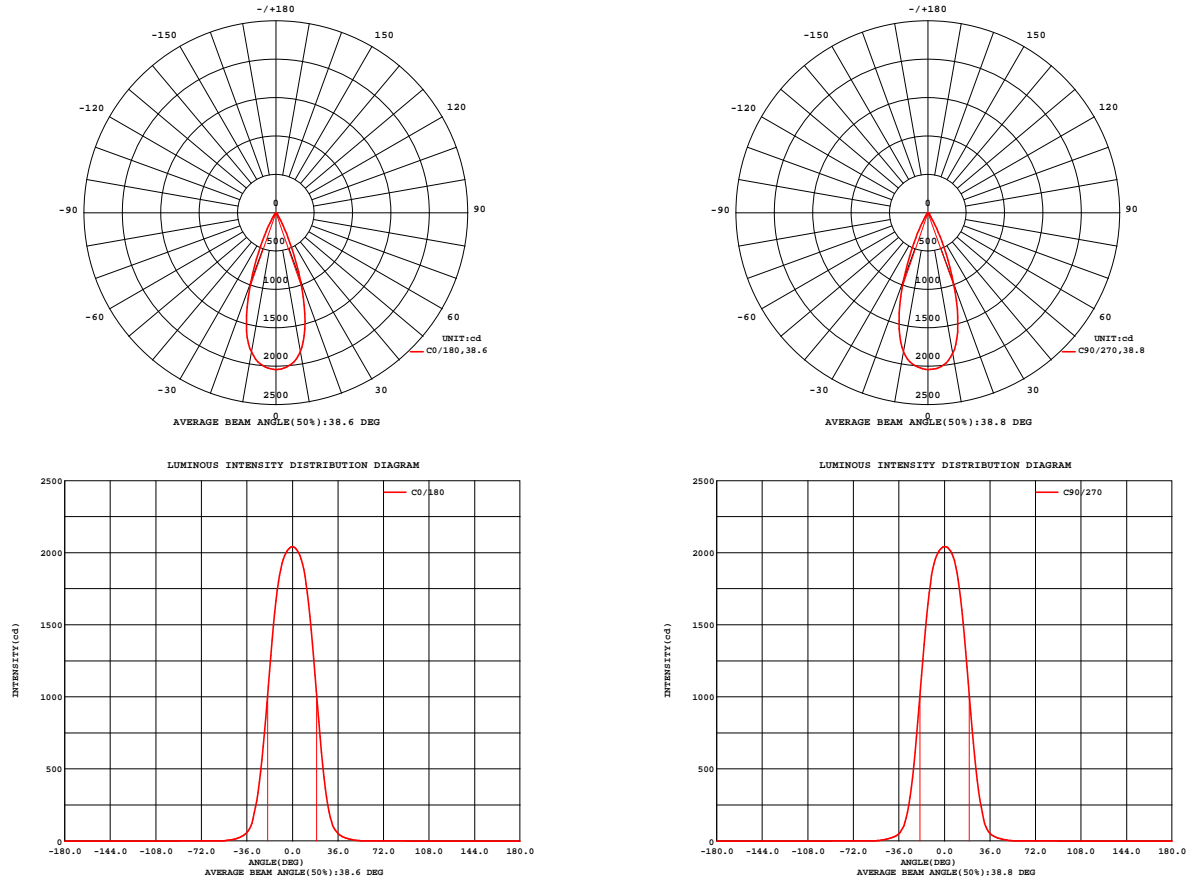


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H1000-B-83 Ra: 95  
LENS: PM-1082B 36R  
NOT DRIVER: 48V  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.93 lm/W			
MODEL	Brideglux	I <sub>max</sub> (cd)	2042	S/MH(C0/180)	0.60
NOMINAL POWER(W)	12	LOR(%)	82.7	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	868.62	UP,DN(C0-180)	0.0,41.7
NOMINAL FLUX(lm)	1050.8	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,40.9
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	48	down(%)	82.7	CIBSE SHR MAX	0.60

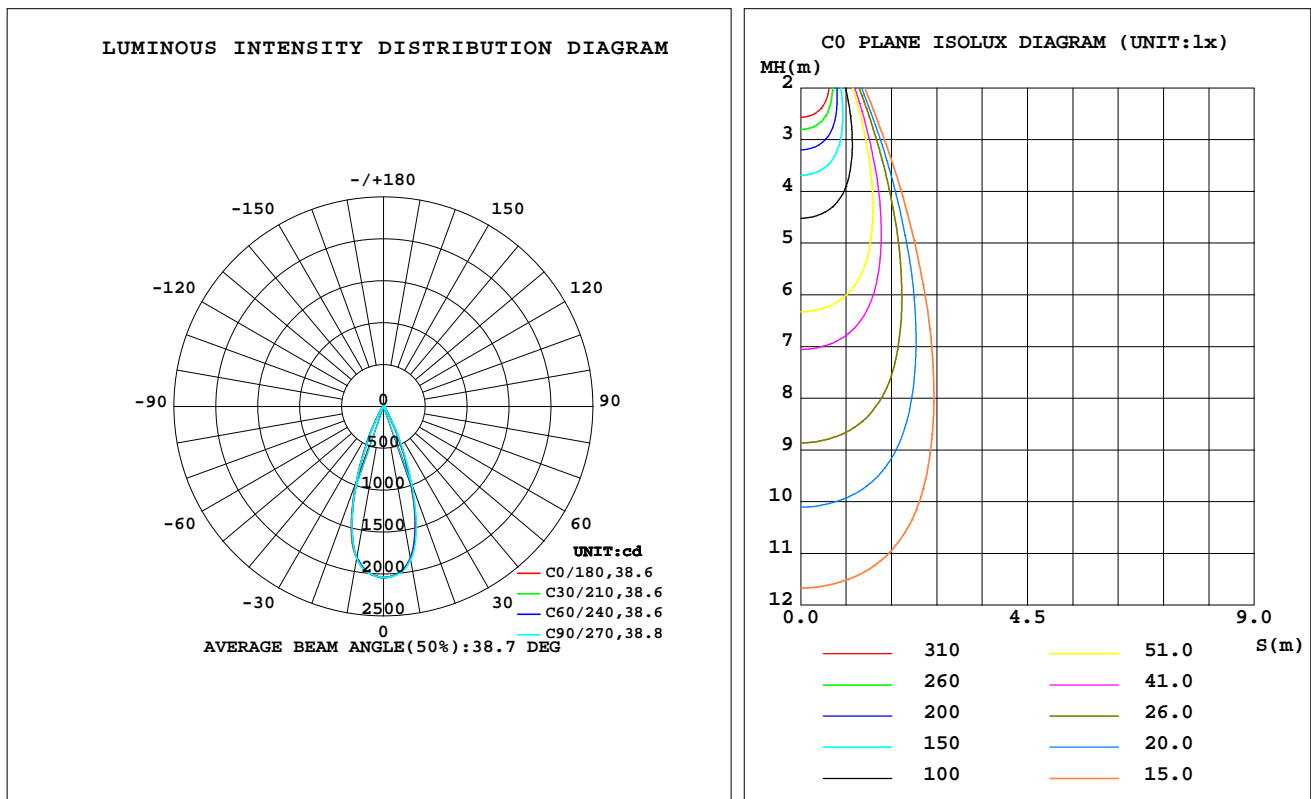

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1837	1845	1859	1869	1842	1832	1841	1855	0- 10	186.4	186.4	21.5,17.7
20	931.3	955.5	986.5	983.7	958.9	931.3	928.9	955.3	10- 20	399.7	586.1	67.5,55.8
30	161.2	175.8	196.2	193.7	194.3	172.8	160.3	166.3	20- 30	221.5	807.6	93,76.9
40	28.82	29.45	29.07	31.43	31.28	29.60	28.37	29.55	30- 40	47.20	854.8	98.4,81.3
50	5.135	5.631	5.508	5.936	5.941	5.829	5.651	5.556	40- 50	11.69	866.5	99.8,82.5
60	0.5725	0.5869	0.5673	0.6784	0.7897	0.6491	0.6222	0.6450	50- 60	1.866	868.4	100,82.6
70	0.0469	0.0436	0.0425	0.0415	0.0416	0.0362	0.0413	0.0389	60- 70	0.1888	868.6	100,82.7
80	0.0295	0.0209	0.0251	0.0200	0.0269	0.0191	0.0276	0.0196	70- 80	0.0311	868.6	100,82.7
90	0	0	0	0	0	0	0	0	80- 90	0.0195	868.6	100,82.7
100	0	0	0	0	0	0	0	0	90-100	0	868.6	100,82.7
110	0	0	0	0	0	0	0	0	100-110	0	868.6	100,82.7
120	0	0	0	0	0	0	0	0	110-120	0	868.6	100,82.7
130	0	0	0	0	0	0	0	0	120-130	0	868.6	100,82.7
140	0	0	0	0	0	0	0	0	130-140	0	868.6	100,82.7
150	0	0	0	0	0	0	0	0	140-150	0	868.6	100,82.7
160	0	0	0	0	0	0	0	0	150-160	0	868.6	100,82.7
170	0	0	0	0	0	0	0	0	160-170	0	868.6	100,82.7
180	0	0	0	0	0	0	0	0	170-180	0	868.6	100,82.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz  
Lamp Flux:1050.8x1 lm

NAME: OZ48-SB-50

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2412211495

MFR.: RISE

SUR.: 0.001884785m2

Shielding Angle:

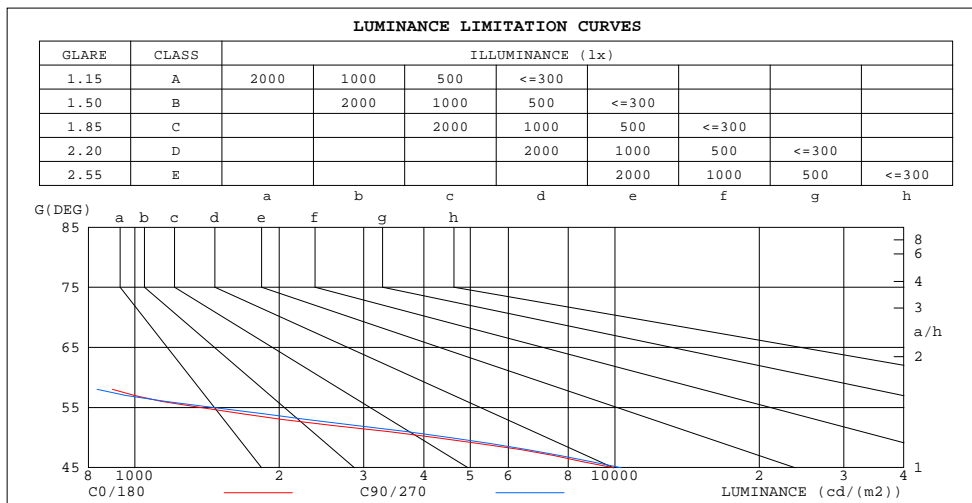

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	140	125
80	90	77
75	72	59
70	73	66
65	180	185
60	608	602
55	1374	1462
50	4239	4546
45	9943	10310


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

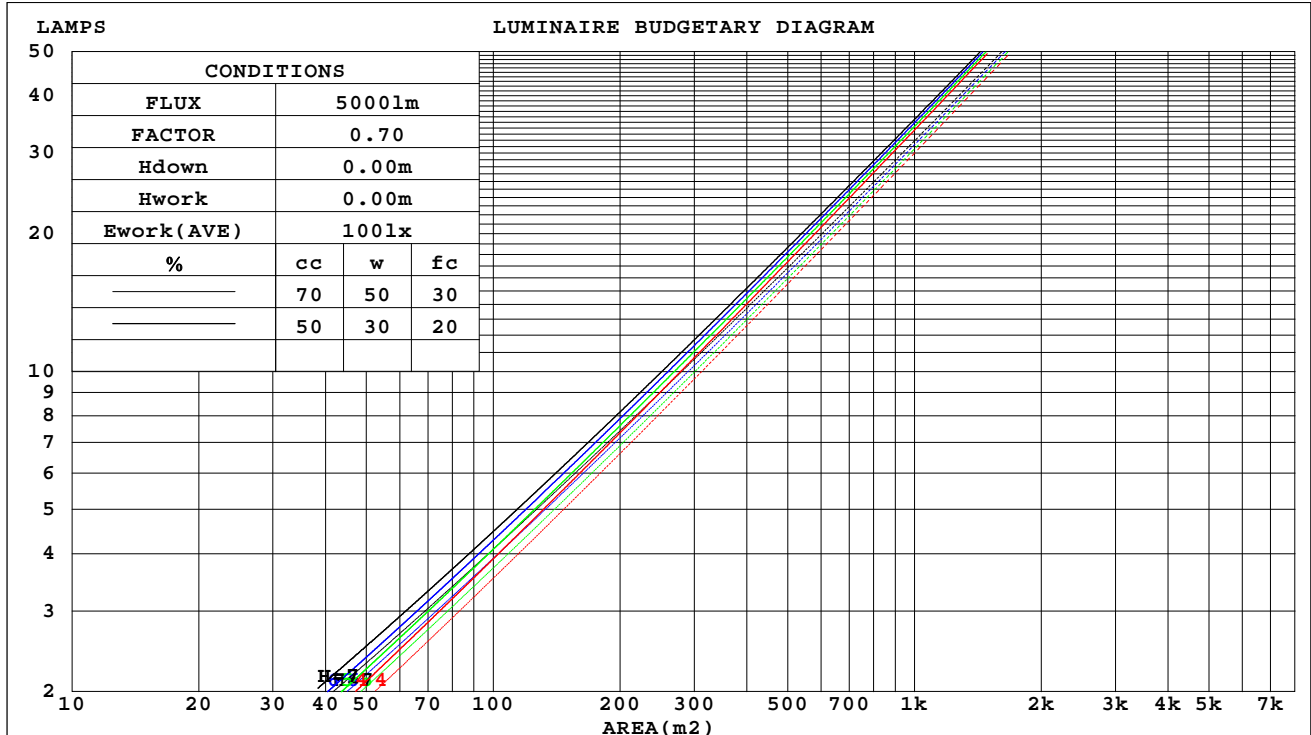

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

### WEC AND CCEC

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.123	.070	.022	.118	.067	.021	.107	.062	.020	.098	.056	.018	.089	.052	.017	
2.0	.115	.063	.019	.111	.061	.019	.102	.057	.018	.094	.053	.017	.087	.049	.016	
3.0	.109	.058	.017	.105	.056	.017	.098	.053	.016	.091	.050	.015	.085	.047	.015	
4.0	.103	.053	.016	.099	.052	.015	.093	.049	.015	.088	.047	.014	.082	.045	.014	
5.0	.097	.050	.014	.095	.049	.014	.089	.047	.014	.084	.045	.013	.080	.043	.013	
6.0	.093	.046	.013	.090	.046	.013	.086	.044	.013	.081	.042	.012	.077	.041	.012	
7.0	.088	.044	.012	.086	.043	.012	.082	.042	.012	.079	.040	.012	.075	.039	.011	
8.0	.085	.041	.012	.083	.041	.012	.079	.040	.011	.076	.039	.011	.073	.037	.011	
9.0	.081	.039	.011	.080	.039	.011	.077	.038	.011	.074	.037	.011	.071	.036	.010	
10.0	.078	.037	.010	.077	.037	.010	.074	.036	.010	.071	.035	.010	.069	.035	.010	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.157	.157	.157	.135	.135	.135	.092	.092	.092	.053	.053	.053	.017	.017	.017	
1.0	.140	.130	.122	.120	.112	.105	.082	.077	.072	.047	.045	.042	.015	.014	.014	
2.0	.126	.110	.096	.108	.094	.083	.074	.065	.058	.043	.038	.034	.014	.012	.011	
3.0	.114	.094	.078	.098	.081	.067	.067	.056	.047	.039	.033	.028	.012	.011	.009	
4.0	.104	.081	.064	.089	.070	.055	.061	.049	.039	.036	.029	.023	.011	.009	.008	
5.0	.096	.071	.053	.082	.062	.046	.057	.043	.032	.033	.025	.019	.011	.008	.006	
6.0	.089	.063	.044	.077	.055	.039	.053	.038	.027	.031	.023	.016	.010	.007	.005	
7.0	.083	.057	.038	.072	.049	.033	.050	.034	.023	.029	.020	.014	.009	.007	.005	
8.0	.078	.051	.032	.067	.044	.028	.047	.031	.020	.027	.018	.012	.009	.006	.004	
9.0	.074	.047	.028	.064	.040	.025	.044	.028	.017	.026	.017	.010	.008	.006	.003	
10.0	.070	.043	.025	.060	.037	.022	.042	.026	.015	.024	.015	.009	.008	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm										
NAME: OZ48-SB-50					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2412211495		
MFR.: RISE					SUR.: 0.001884785m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.8	12.5	12.0	12.7	12.8	12.0	12.7	12.2	12.9	13.1
3H	11.6	12.3	11.8	12.5	12.7	11.8	12.5	12.1	12.7	12.9
4H	11.5	12.2	11.8	12.4	12.6	11.8	12.4	12.0	12.6	12.8
6H	11.4	12.0	11.7	12.3	12.5	11.7	12.3	12.0	12.5	12.8
8H	11.4	12.0	11.7	12.2	12.5	11.6	12.2	11.9	12.5	12.7
12H	11.3	11.9	11.7	12.2	12.4	11.6	12.2	11.9	12.4	12.7
4H 2H	11.5	12.2	11.8	12.4	12.6	11.8	12.4	12.0	12.6	12.8
3H	11.3	11.9	11.7	12.2	12.4	11.6	12.2	11.9	12.4	12.7
4H	11.3	11.8	11.6	12.1	12.4	11.5	12.0	11.8	12.3	12.6
6H	11.2	11.6	11.5	11.9	12.3	11.4	11.9	11.8	12.2	12.5
8H	11.1	11.5	11.5	11.9	12.2	11.3	11.8	11.7	12.1	12.5
12H	11.0	11.4	11.5	11.8	12.2	11.3	11.7	11.7	12.0	12.4
8H 4H	11.1	11.5	11.5	11.9	12.2	11.3	11.8	11.7	12.1	12.5
6H	11.0	11.3	11.4	11.7	12.1	11.2	11.6	11.7	12.0	12.4
8H	10.9	11.2	11.4	11.7	12.1	11.2	11.5	11.6	11.9	12.3
12H	10.9	11.1	11.3	11.6	12.0	11.1	11.4	11.6	11.8	12.3
12H 4H	11.0	11.4	11.4	11.8	12.2	11.3	11.7	11.7	12.0	12.4
6H	10.9	11.2	11.4	11.7	12.1	11.2	11.5	11.6	11.9	12.3
8H	10.9	11.1	11.3	11.6	12.0	11.1	11.4	11.6	11.8	12.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / -16.2					+ 3.5 / -16.2				
1.5H	+ 5.3 / -12.5					+ 5.5 / -12.6				
2.0H	+ 6.8 / -16.4					+ 6.9 / -16.7				

CIE Pub.117, 1051 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)  
Area: 0.00188479 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	75	70	67	74	70	67	74	70	67	64
0.80	81	76	74	80	76	73	79	76	73	70
1.00	84	80	77	83	79	77	82	79	76	73
1.25	87	83	80	86	83	80	84	82	79	76
1.50	89	85	83	88	85	82	86	84	82	78
2.00	91	88	85	90	87	85	87	85	83	79
2.50	92	89	87	91	88	86	88	86	85	80
3.00	93	91	88	92	89	88	89	87	86	81
4.00	95	93	91	93	91	90	90	89	88	82
5.00	96	94	93	94	92	91	91	90	89	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

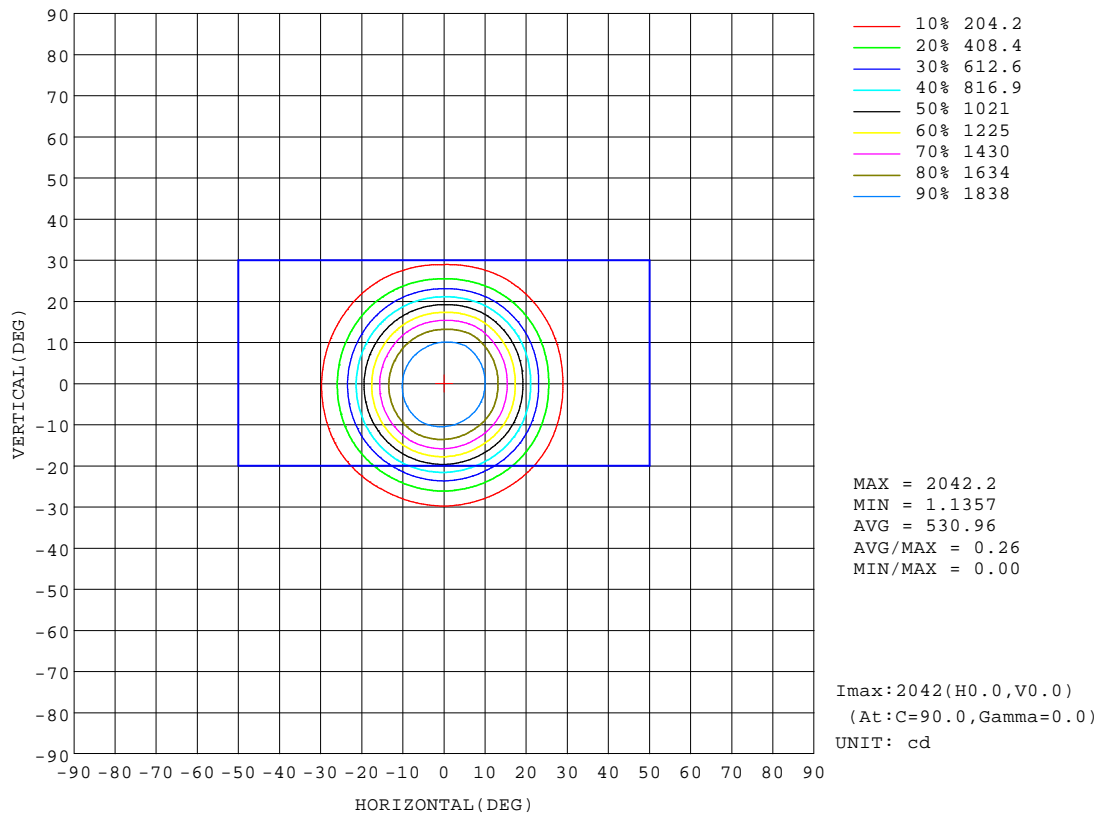


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## AAI Figure

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

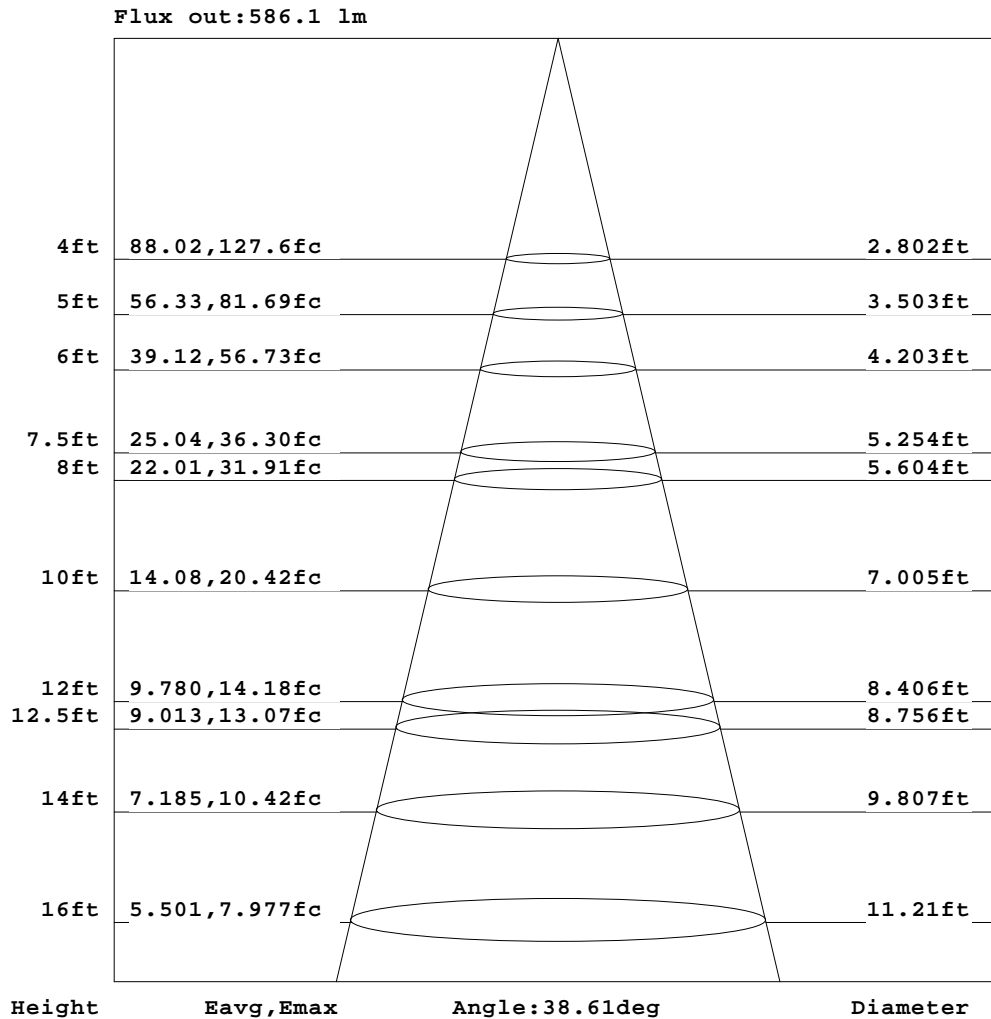


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: zoe  
Test Date: 2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H1000-B-83 Ra: 95  
LENS: PM-1082B 36R  
NOT DRIVER: 48V  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

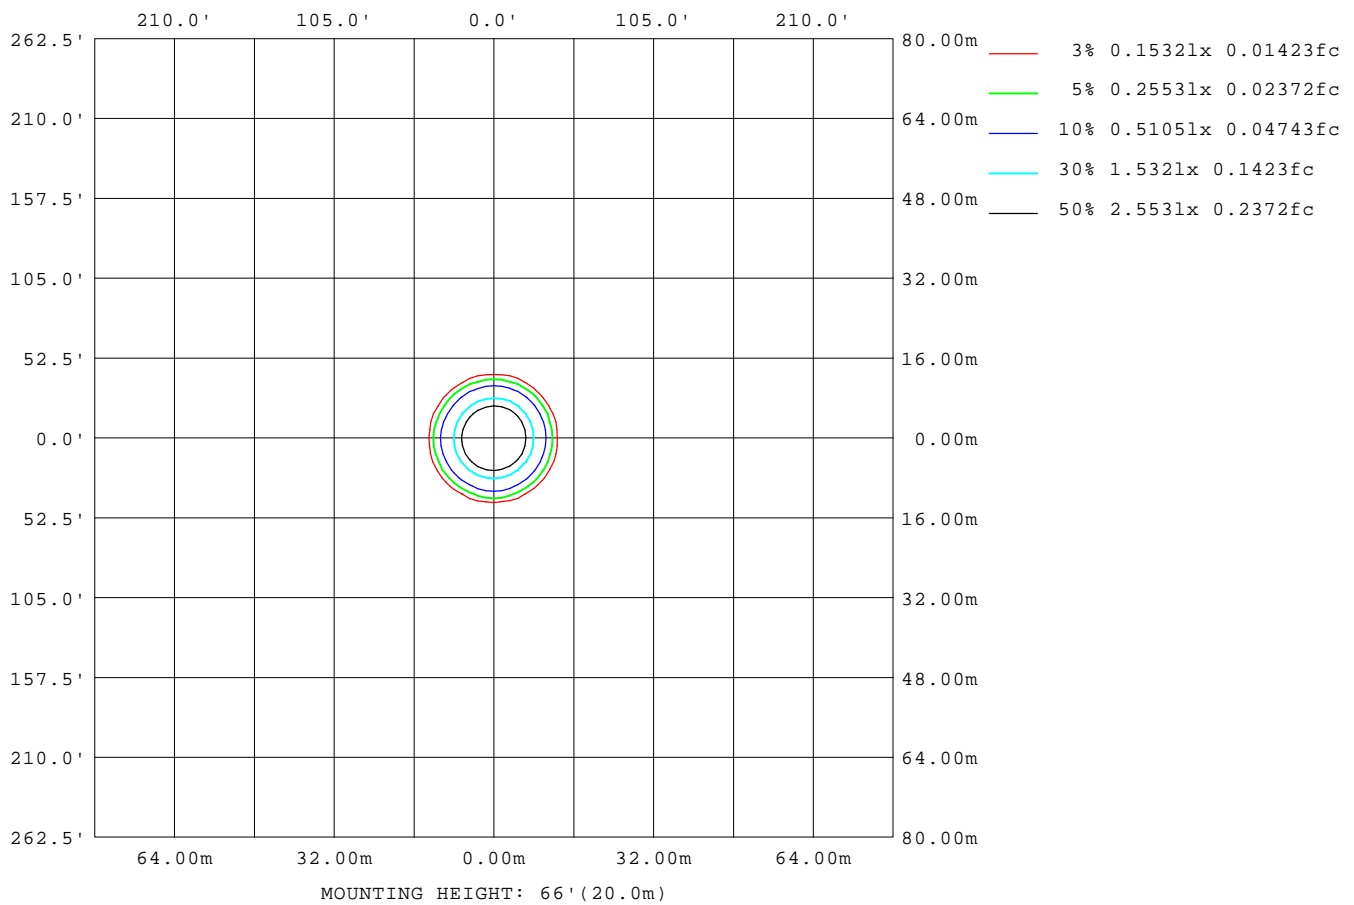

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## LED Avg.L Report

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	179
L_0~180(75)av	70
L_0~180(85)av	145
L_90~270(65)av	179
L_90~270(75)av	64
L_90~270(85)av	140
L_45(65)av	173
L_45(75)av	51
L_45(85)av	90

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up

## Planar Illuminance Curve

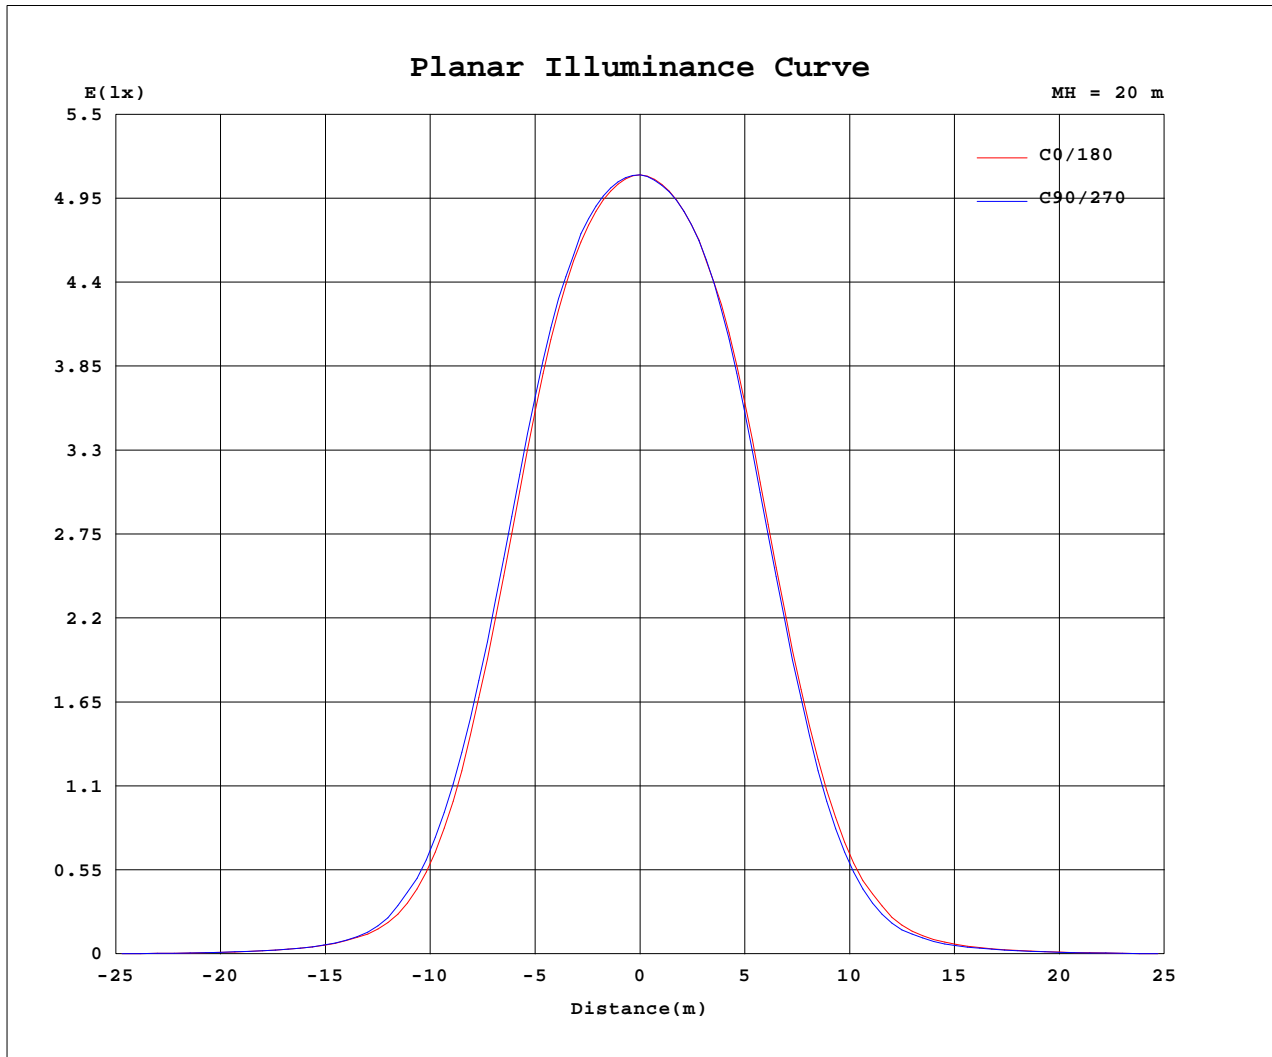

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2024-12-21

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30H1000-B-83 Ra: 95  
 LENS: PM-1082B 36R  
 NOT DRIVER: 48V  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:47.997V I:0.2448A P:11.750W PF:1.0000 Freq:49.99Hz Lamp Flux:1050.8x1 lm		
NAME: OZ48-SB-50	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2412211495
MFR.: RISE	SUR.: 0.001884785m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2042	2042	2042	2042	2042	2042	2042	2042	2042	2042	2042	2042						
5	1999	1999	2001	2009	2011	2006	1998	1992	1994	1998	2005	2002						
10	1837	1842	1848	1859	1879	1859	1842	1835	1829	1841	1860	1849						
15	1466	1491	1484	1513	1538	1514	1495	1467	1466	1462	1511	1480						
20	931	954	957	987	991	976	959	932	931	929	961	950						
25	443	465	473	498	488	492	480	459	453	441	461	460						
30	161	173	178	196	185	203	194	176	170	160	168	165						
35	65.2	66.2	67.7	65.8	71.6	72.2	70.0	69.5	62.1	59.5	63.6	62.2						
40	28.8	30.2	28.7	29.1	30.9	31.9	31.3	30.5	28.7	28.4	30.2	28.9						
45	13.2	14.2	13.9	13.7	14.5	15.0	14.6	14.5	14.2	14.2	14.6	13.7						
50	5.14	5.60	5.66	5.51	5.74	6.13	5.94	5.93	5.73	5.65	5.75	5.36						
55	1.48	1.59	1.56	1.58	1.71	1.85	1.79	1.73	1.60	1.50	1.54	1.45						
60	0.57	0.56	0.61	0.57	0.56	0.79	0.79	0.67	0.63	0.62	0.66	0.63						
65	0.14	0.14	0.14	0.15	0.14	0.14	0.14	0.14	0.13	0.14	0.13	0.14						
70	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.04						
75	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.02	0.03						
80	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02	0.03	0.02	0.02						
85	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.01						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-12-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H1000-B-83 Ra:95  
LENS:PM-1082B 36R  
NOT DRIVER:48V  
30minutes warm-up