

Luminaire Photograph



Light Output Ratio:	40.6%	
Luminaire Power:	8.183 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
LENS: PM-0145 20R
NOT DRIVER: 48V
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

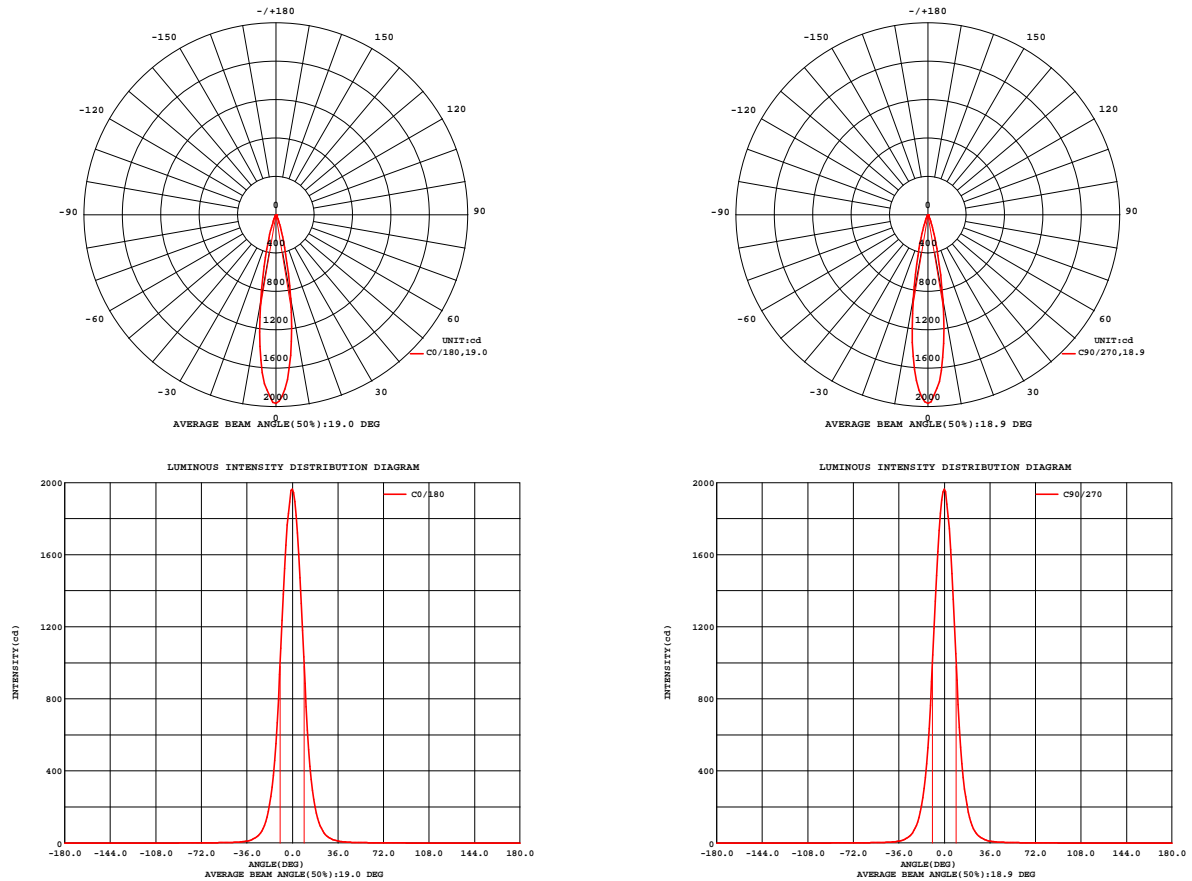


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
LENS: PM-0145 20R
NOT DRIVER: 48V
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 34.32 lm/W			
MODEL	Brideglux	I _{max} (cd)	1964	S/MH(C0/180)	0.33
NOMINAL POWER(W)	8	LOR(%)	40.6	S/MH(C90/270)	0.32
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	280.88	UP,DN(C0-180)	0.0,20.3
NOMINAL FLUX(lm)	692.395	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,20.2
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	48	down(%)	40.6	CIBSE SHR MAX	0.30

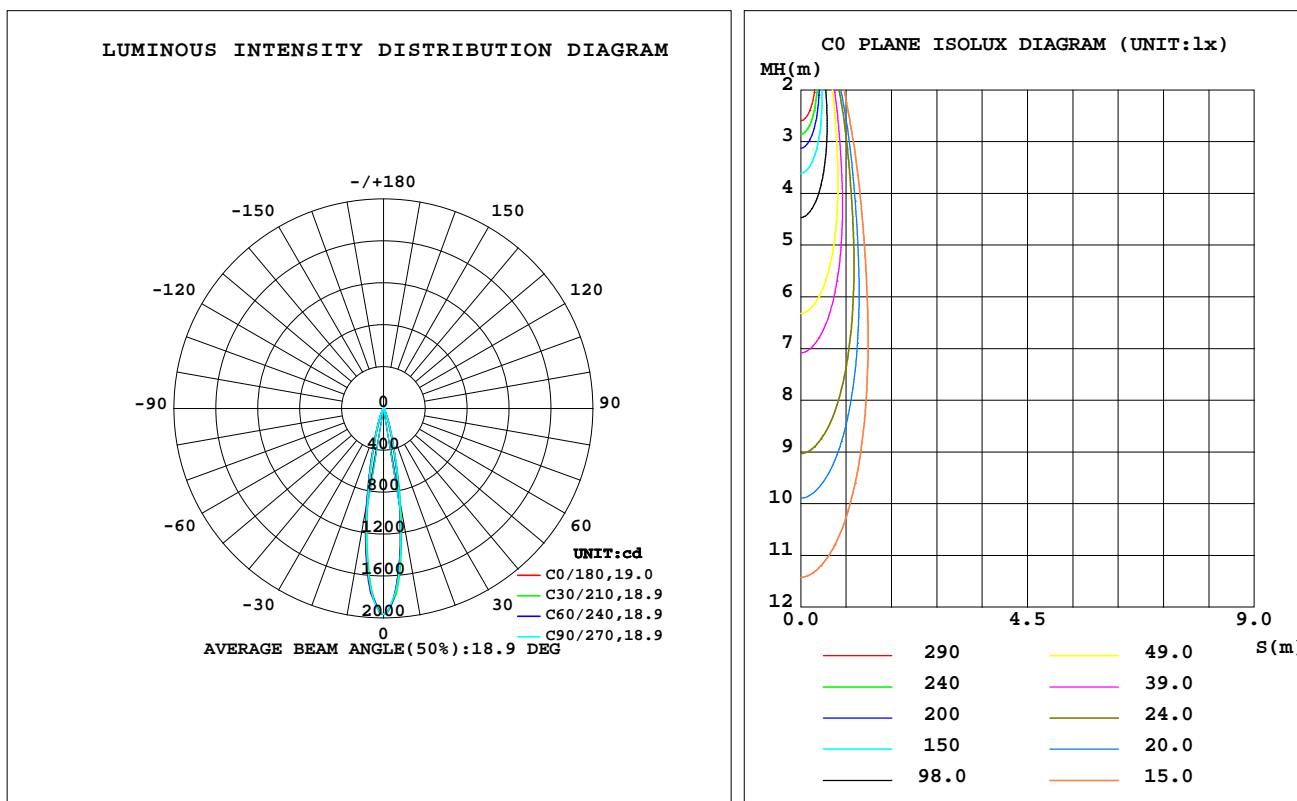

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	885.6	910.7	903.5	913.1	934.9	896.4	894.9	900.0	0- 10	130.9	130.9	46.6,18.9
20	136.8	139.5	140.4	139.9	143.7	136.6	141.6	140.9	10- 20	107.4	238.3	84.8,34.4
30	25.90	23.77	25.27	25.38	25.22	22.33	24.88	26.05	20- 30	28.28	266.6	94.9,38.5
40	6.636	6.290	6.518	6.577	6.471	5.848	6.280	6.558	30- 40	8.025	274.6	97.8,39.7
50	2.930	2.908	2.902	2.924	2.928	2.800	2.816	2.867	40- 50	3.221	277.8	98.9,40.1
60	1.618	1.681	1.657	1.595	1.501	1.439	1.435	1.523	50- 60	2.022	279.8	99.6,40.4
70	0.3101	0.3318	0.3523	0.3221	0.2674	0.2440	0.2446	0.2809	60- 70	0.7514	280.6	99.9,40.5
80	0.1615	0.1711	0.1890	0.1637	0.1387	0.1213	0.1345	0.1509	70- 80	0.1893	280.8	100,40.6
90	0	0	0	0	0	0	0	0	80- 90	0.1086	280.9	100,40.6
100	0	0	0	0	0	0	0	0	90-100	0	280.9	100,40.6
110	0	0	0	0	0	0	0	0	100-110	0	280.9	100,40.6
120	0	0	0	0	0	0	0	0	110-120	0	280.9	100,40.6
130	0	0	0	0	0	0	0	0	120-130	0	280.9	100,40.6
140	0	0	0	0	0	0	0	0	130-140	0	280.9	100,40.6
150	0	0	0	0	0	0	0	0	140-150	0	280.9	100,40.6
160	0	0	0	0	0	0	0	0	150-160	0	280.9	100,40.6
170	0	0	0	0	0	0	0	0	160-170	0	280.9	100,40.6
180	0	0	0	0	0	0	0	0	170-180	0	280.9	100,40.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz
Lamp Flux:692.395x1 lm

NAME: OZ48-SBZ-40

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2501040015

MFR.: RISE

SUR.: 0.00113354m2

Shielding Angle:

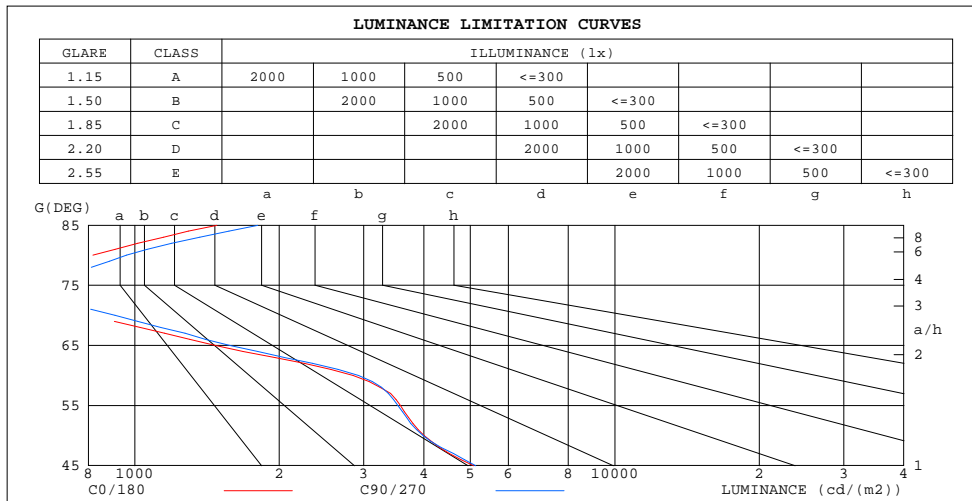

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	1481	1805
80	818	961
75	584	675
70	798	910
65	1470	1576
60	2848	2927
55	3576	3536
50	4010	3986
45	5082	5131

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4


Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz
Lamp Flux:692.395x1 lm

NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

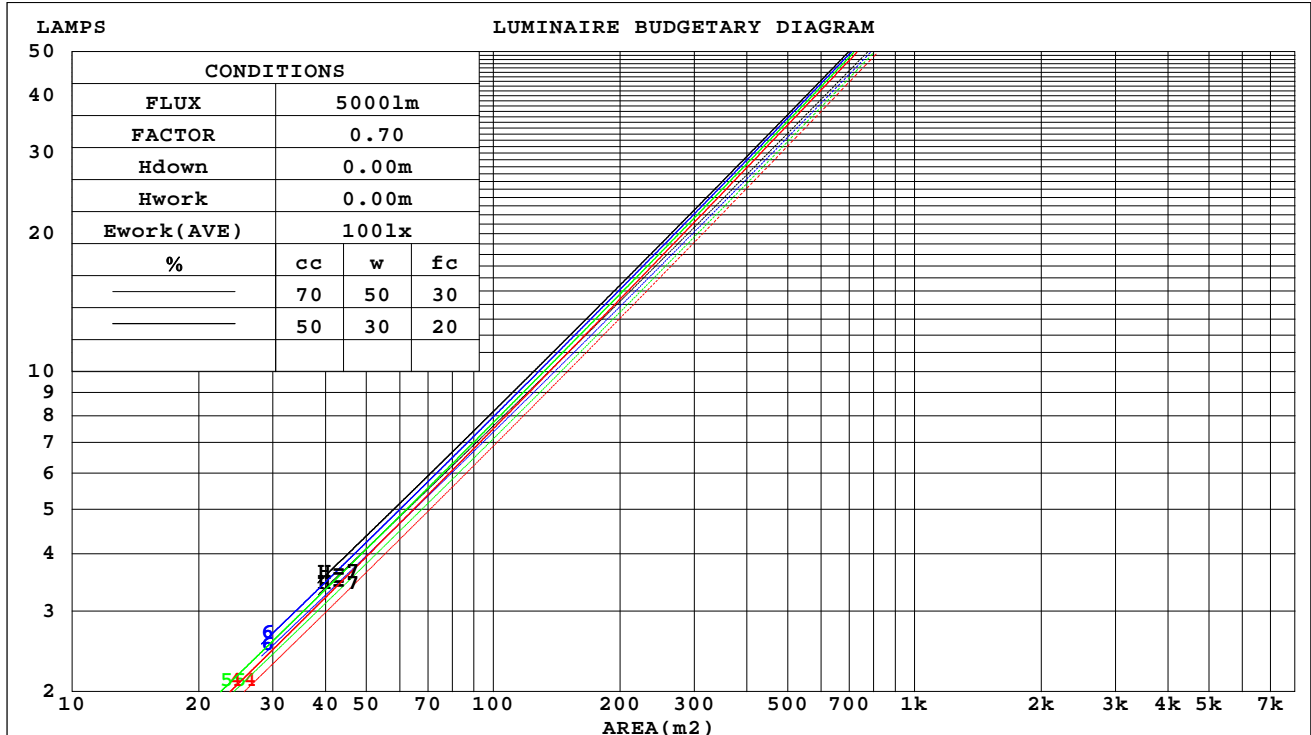

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up



WEC AND CCEC

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.053	.030	.010	.050	.029	.009	.045	.026	.008	.041	.023	.008	.036	.021	.007	
2.0	.049	.027	.008	.046	.026	.008	.042	.024	.007	.039	.022	.007	.035	.020	.006	
3.0	.045	.024	.007	.043	.023	.007	.040	.022	.007	.037	.020	.006	.034	.019	.006	
4.0	.042	.022	.006	.040	.021	.006	.038	.020	.006	.035	.019	.006	.032	.018	.005	
5.0	.039	.020	.006	.038	.020	.006	.036	.019	.005	.033	.018	.005	.031	.017	.005	
6.0	.037	.019	.005	.036	.018	.005	.034	.017	.005	.032	.017	.005	.030	.016	.005	
7.0	.035	.017	.005	.034	.017	.005	.032	.016	.005	.031	.016	.005	.029	.015	.004	
8.0	.033	.016	.005	.032	.016	.005	.031	.015	.004	.029	.015	.004	.028	.014	.004	
9.0	.032	.015	.004	.031	.015	.004	.030	.015	.004	.028	.014	.004	.027	.014	.004	
10.0	.030	.014	.004	.030	.014	.004	.028	.014	.004	.027	.013	.004	.026	.013	.004	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.077	.077	.077	.066	.066	.066	.045	.045	.045	.026	.026	.026	.008	.008	.008	
1.0	.068	.064	.060	.058	.055	.052	.040	.038	.036	.023	.022	.021	.007	.007	.007	
2.0	.061	.054	.048	.052	.046	.042	.036	.032	.029	.021	.019	.017	.007	.006	.006	
3.0	.054	.046	.039	.047	.040	.034	.032	.028	.024	.018	.016	.014	.006	.005	.005	
4.0	.049	.040	.032	.042	.034	.028	.029	.024	.020	.017	.014	.012	.005	.005	.004	
5.0	.045	.035	.027	.038	.030	.024	.026	.021	.017	.015	.012	.010	.005	.004	.003	
6.0	.041	.030	.023	.035	.026	.020	.024	.018	.014	.014	.011	.008	.005	.004	.003	
7.0	.038	.027	.020	.032	.024	.017	.022	.016	.012	.013	.010	.007	.004	.003	.002	
8.0	.035	.024	.017	.030	.021	.015	.021	.015	.011	.012	.009	.006	.004	.003	.002	
9.0	.033	.022	.015	.028	.019	.013	.019	.013	.009	.011	.008	.005	.004	.003	.002	
10.0	.030	.020	.013	.026	.017	.011	.018	.012	.008	.011	.007	.005	.003	.002	.002	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm										
NAME: OZ48-SBZ-40					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2501040015		
MFR.: RISE					SUR.: 0.00113354m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.4	10.0	9.6	10.2	10.3	9.5	10.1	9.7	10.2	10.3
3H	9.5	10.0	9.7	10.2	10.4	9.5	10.1	9.7	10.2	10.4
4H	9.4	9.9	9.7	10.2	10.4	9.5	10.0	9.7	10.2	10.4
6H	9.4	9.9	9.7	10.1	10.3	9.4	10.0	9.7	10.2	10.4
8H	9.4	9.9	9.7	10.1	10.4	9.5	10.0	9.7	10.2	10.4
12H	9.4	9.9	9.7	10.1	10.4	9.5	10.0	9.8	10.2	10.5
4H 2H	9.5	10.0	9.8	10.2	10.5	9.5	10.1	9.8	10.3	10.5
3H	9.5	10.0	9.8	10.2	10.5	9.6	10.0	9.9	10.3	10.6
4H	9.5	9.9	9.8	10.2	10.5	9.5	10.0	9.9	10.2	10.5
6H	9.5	9.8	9.8	10.2	10.5	9.5	9.9	9.9	10.2	10.6
8H	9.5	9.8	9.9	10.2	10.5	9.6	9.9	10.0	10.3	10.6
12H	9.5	9.9	9.9	10.2	10.6	9.7	10.0	10.1	10.4	10.8
8H 4H	9.4	9.7	9.7	10.1	10.4	9.4	9.8	9.8	10.1	10.5
6H	9.4	9.7	9.8	10.1	10.5	9.5	9.8	9.9	10.1	10.6
8H	9.4	9.7	9.9	10.1	10.5	9.6	9.8	10.0	10.2	10.7
12H	9.6	9.8	10.0	10.2	10.7	9.8	10.0	10.2	10.4	10.9
12H 4H	9.3	9.6	9.7	10.0	10.4	9.4	9.7	9.8	10.1	10.4
6H	9.3	9.6	9.8	10.0	10.5	9.4	9.7	9.9	10.1	10.5
8H	9.4	9.7	9.9	10.1	10.6	9.5	9.8	10.0	10.2	10.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 1.7					+ 1.4 / - 1.6				
1.5H	+ 2.6 / - 1.3					+ 2.4 / - 1.2				
2.0H	+ 1.4 / - 2.5					+ 1.3 / - 2.2				

CIE Pub.117, 692.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)
Area: 0.00113354 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	37	34	33	36	34	33	36	34	33	31
0.80	39	37	36	39	37	36	39	37	36	34
1.00	41	39	38	41	39	37	40	39	37	36
1.25	42	41	39	42	40	39	41	40	39	37
1.50	44	42	41	43	41	40	42	41	40	38
2.00	44	43	42	44	42	41	43	42	41	39
2.50	45	44	43	44	43	42	43	42	41	39
3.00	46	44	43	45	44	43	44	43	42	39
4.00	46	45	45	46	45	44	44	43	43	40
5.00	47	46	45	46	45	45	44	44	43	40
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

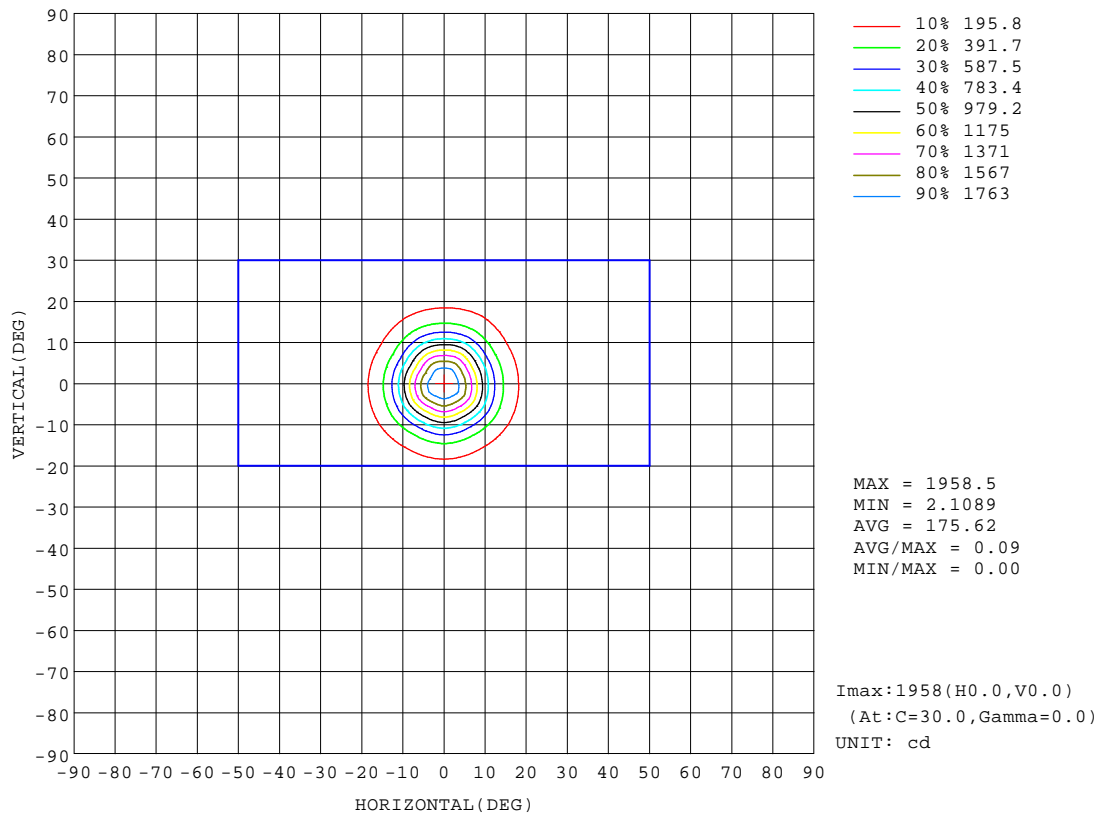


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

AAI Figure

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

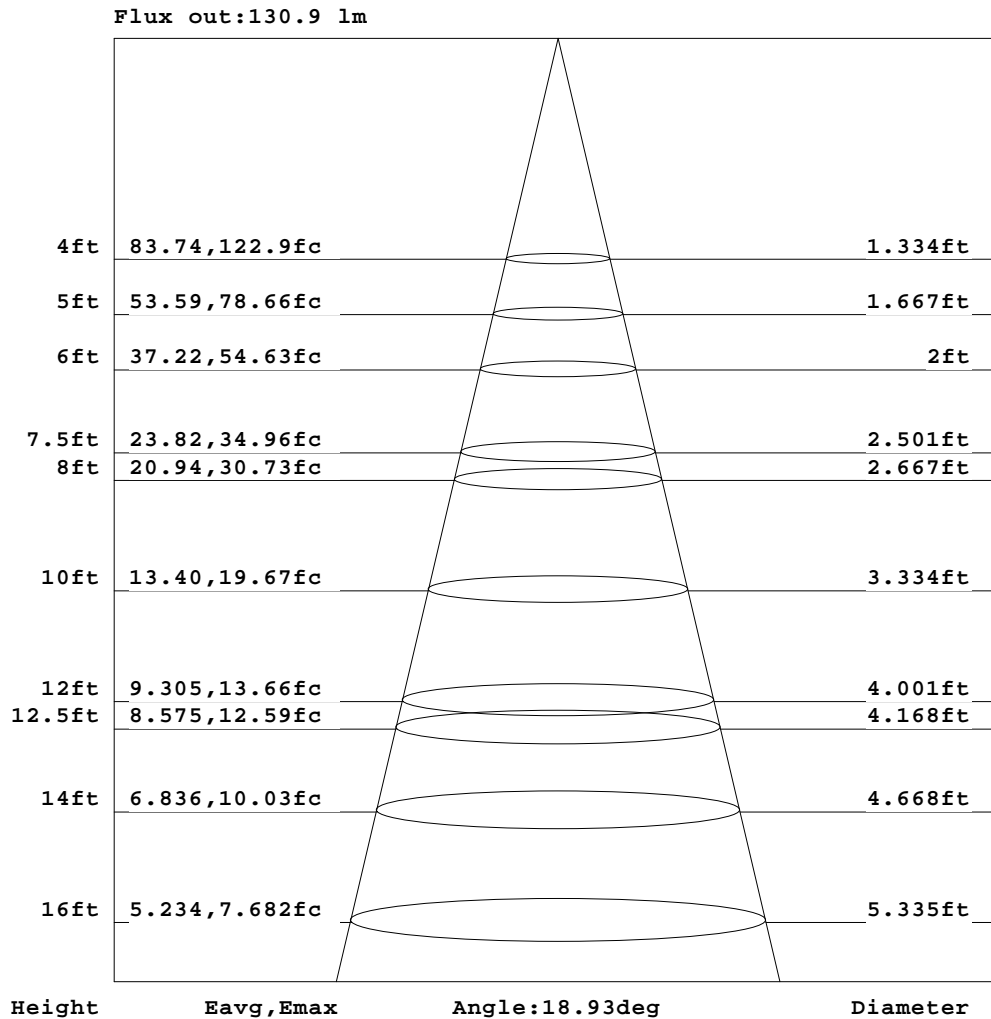


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

ISOLUX DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

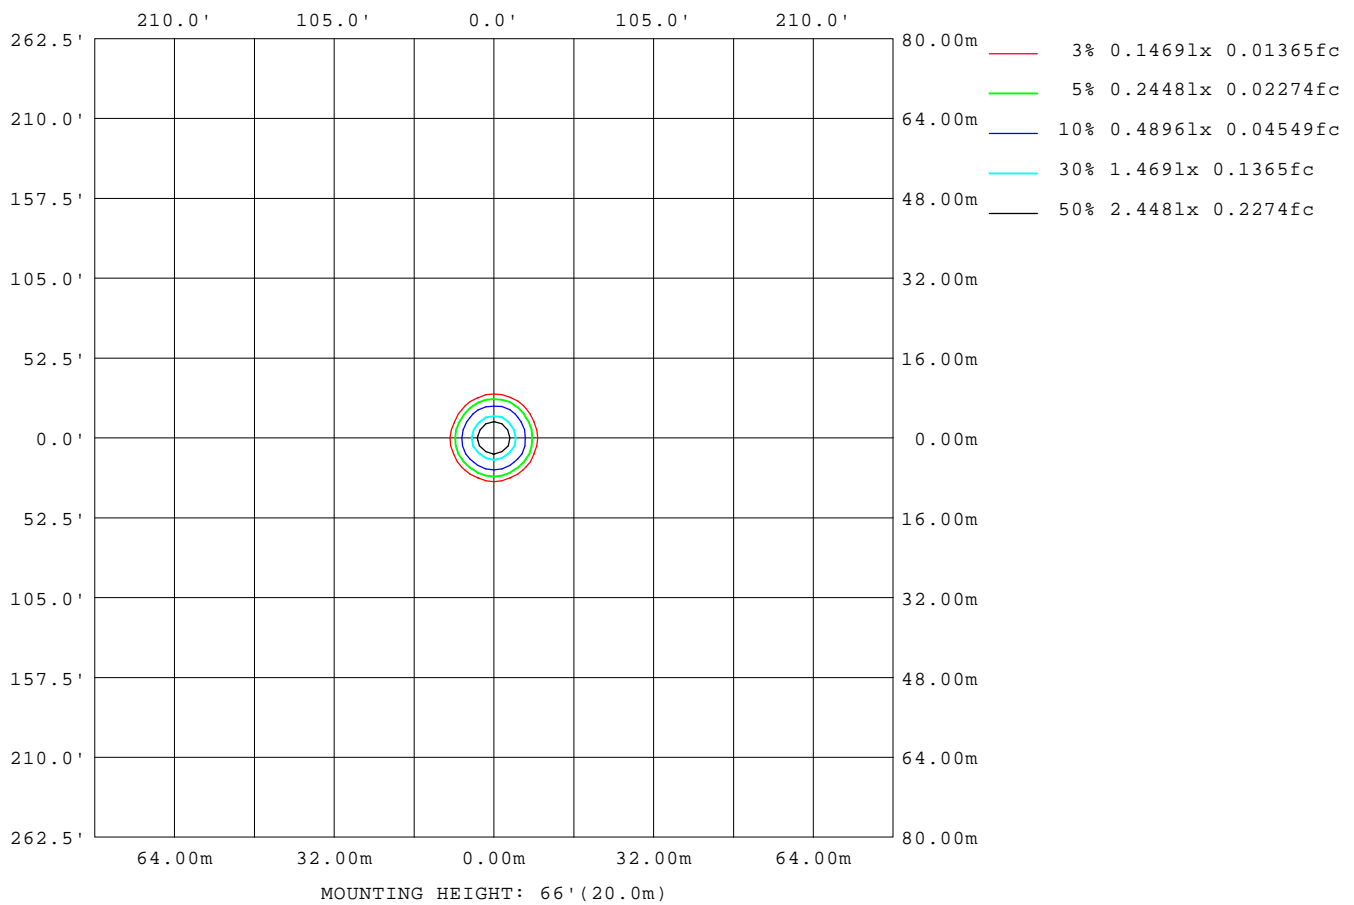

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

LED Avg.L Report

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1390
L_0~180(75)av	543
L_0~180(85)av	1332
L_90~270(65)av	1402
L_90~270(75)av	580
L_90~270(85)av	1485
L_45(65)av	1413
L_45(75)av	554
L_45(85)av	1339

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up

Planar Illuminance Curve

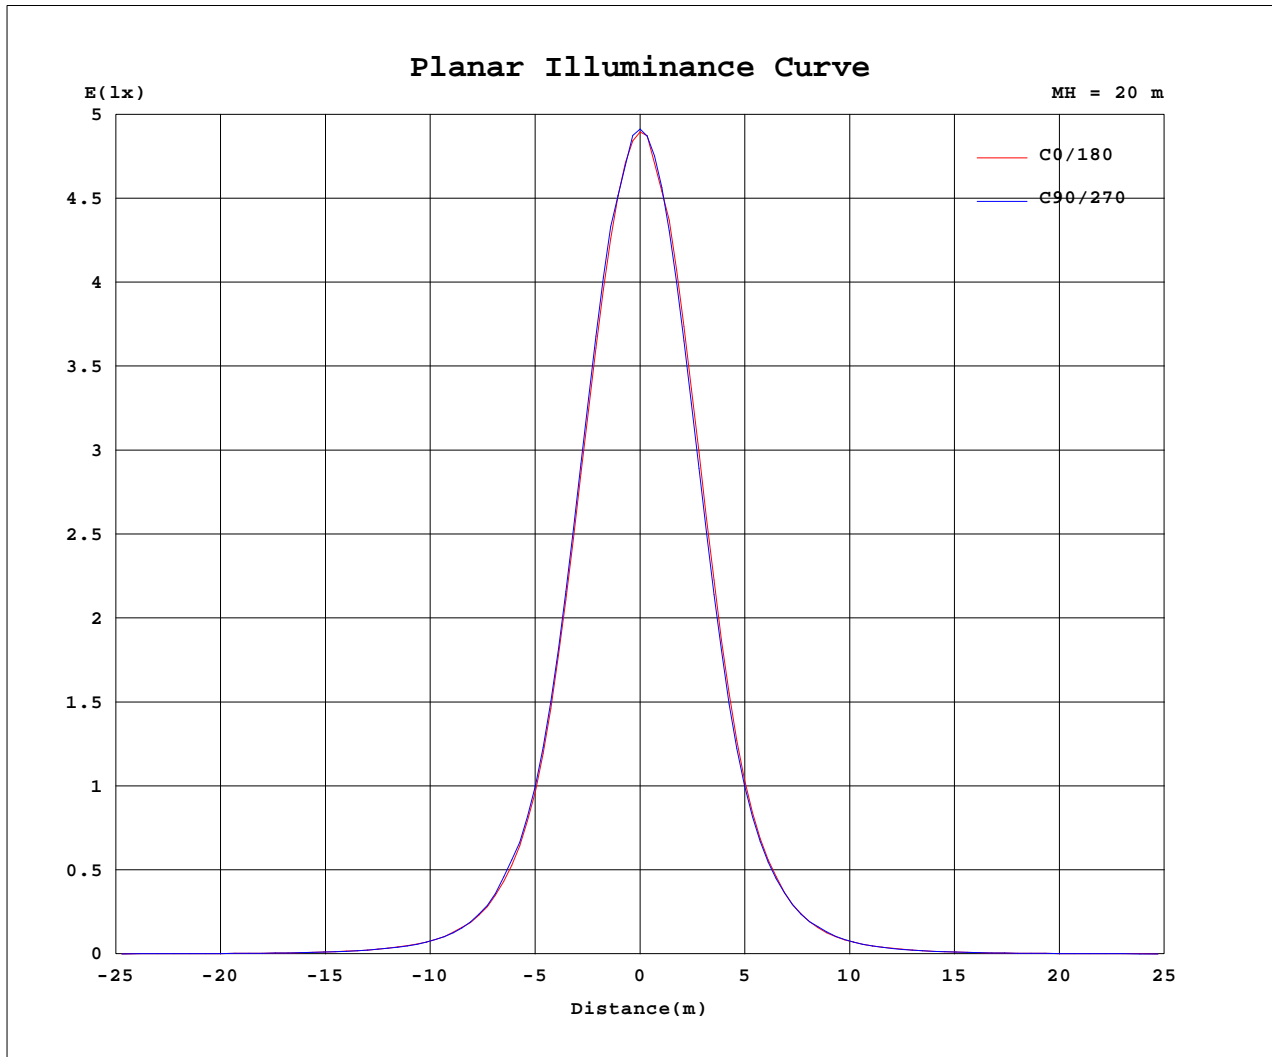

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-1-4

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97
 LENS: PM-0145 20R
 NOT DRIVER: 48V
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501040015
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1964	1964	1964	1964	1964	1964	1964	1964	1964	1964	1964	1964						
5	1604	1661	1606	1627	1603	1670	1653	1587	1638	1617	1645	1580						
10	886	943	878	903	881	945	935	876	917	895	929	871						
15	353	377	348	363	345	380	376	340	371	363	379	341						
20	137	144	135	140	135	145	144	131	142	142	148	134						
25	55.8	55.9	53.8	55.7	54.0	57.5	55.9	49.7	54.9	56.4	59.3	54.8						
30	25.9	23.8	23.7	25.3	24.3	26.4	25.2	20.9	23.7	24.9	26.5	25.6						
35	12.5	11.5	11.6	12.2	11.7	12.7	12.0	10.2	11.2	11.8	12.5	12.4						
40	6.64	6.27	6.31	6.52	6.31	6.85	6.47	5.66	6.04	6.28	6.53	6.58						
45	4.08	4.09	4.00	4.11	3.99	4.31	4.08	3.73	3.84	3.89	4.06	4.01						
50	2.93	2.91	2.91	2.90	2.91	2.94	2.93	2.76	2.84	2.82	2.90	2.83						
55	2.33	2.34	2.34	2.30	2.32	2.31	2.32	2.22	2.26	2.23	2.29	2.23						
60	1.62	1.68	1.68	1.66	1.63	1.56	1.50	1.45	1.43	1.44	1.49	1.55						
65	0.71	0.72	0.75	0.75	0.75	0.68	0.63	0.61	0.61	0.59	0.62	0.67						
70	0.31	0.32	0.34	0.35	0.34	0.31	0.27	0.25	0.24	0.24	0.27	0.29						
75	0.17	0.17	0.19	0.20	0.19	0.17	0.15	0.13	0.13	0.14	0.15	0.17						
80	0.16	0.16	0.18	0.19	0.17	0.16	0.14	0.12	0.12	0.13	0.15	0.15						
85	0.15	0.15	0.17	0.18	0.16	0.14	0.12	0.09	0.09	0.12	0.13	0.14						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-1-4

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97
LENS:PM-0145 20R
NOT DRIVER:48V
30minutes warm-up