

### Luminaire Photograph



Light Output Ratio:	52.3%	
Luminaire Power:	8.183 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97  
LENS: PM-0145 40R  
NOT DRIVER: 48V  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

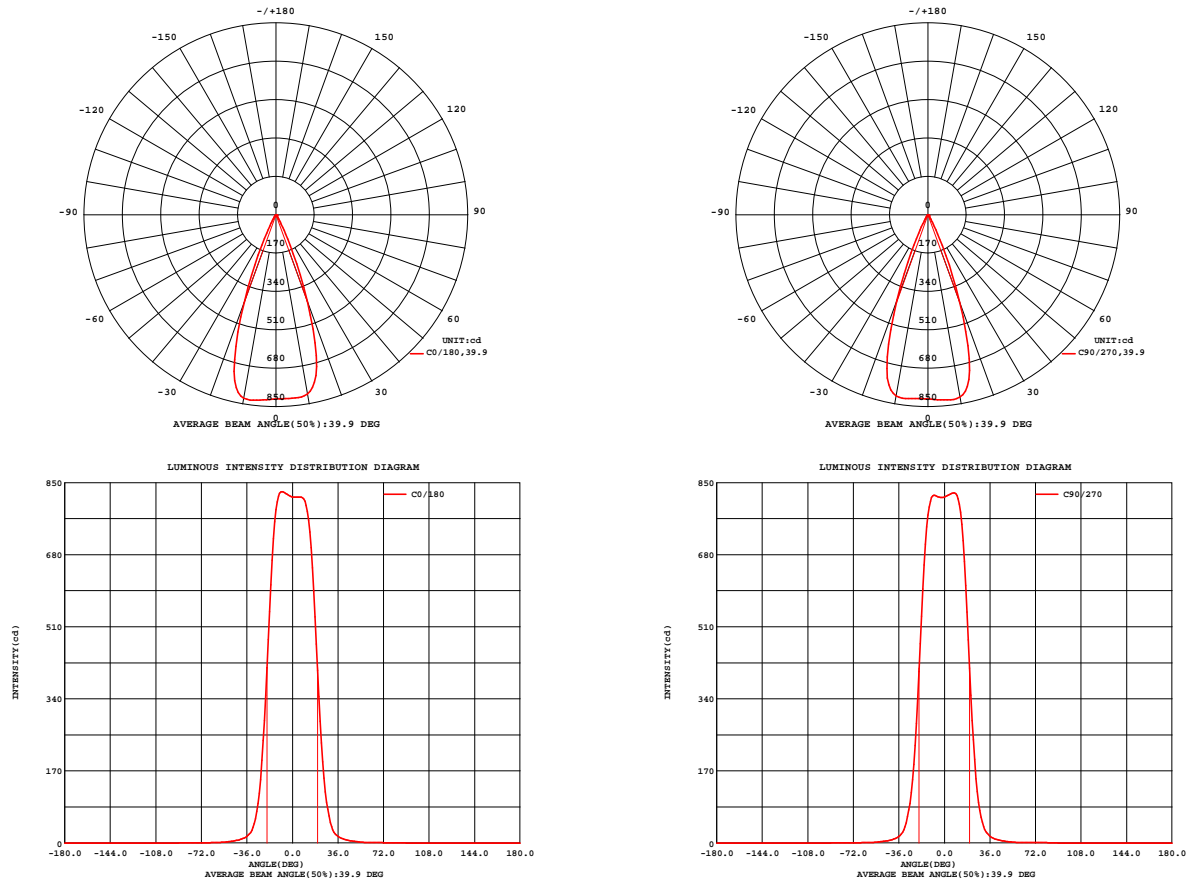


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-1-4

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97  
LENS: PM-0145 40R  
NOT DRIVER: 48V  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 44.25 lm/W			
MODEL	Brideglux	I <sub>max</sub> (cd)	830.0	S/MH(C0/180)	0.59
NOMINAL POWER(W)	8	LOR(%)	52.3	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	362.09	η UP,DN(C0-180)	0.0,26.1
NOMINAL FLUX(lm)	692.395	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,26.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	48	η down(%)	52.3	CIBSE SHR MAX	0.55

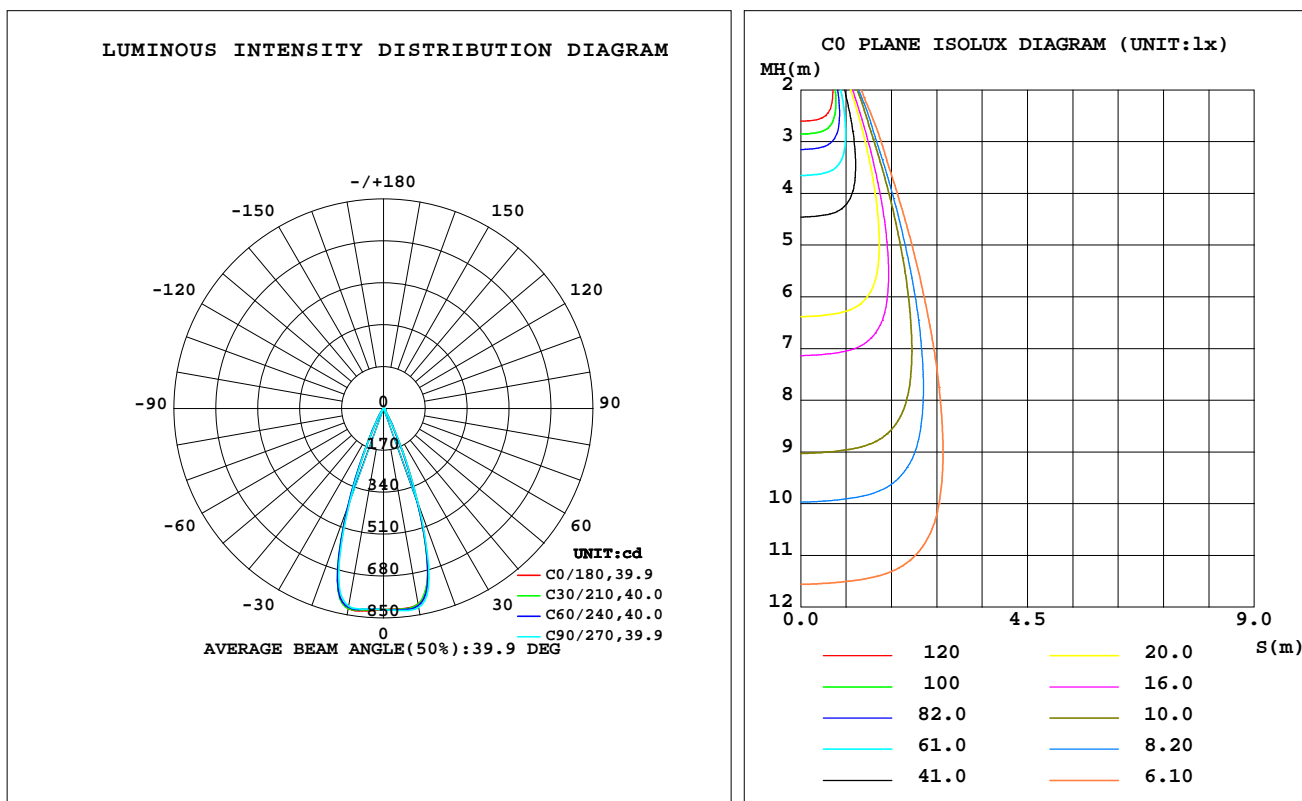

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	805.6	809.6	819.6	824.4	824.5	821.7	814.6	805.7	0- 10	78.23	78.23	21.6,11.3
20	407.2	398.5	412.6	413.7	413.1	427.0	404.0	406.9	10- 20	184.3	262.6	72.5,37.9
30	47.77	47.39	49.09	48.39	45.63	49.79	47.18	48.53	20- 30	78.57	341.1	94.2,49.3
40	9.968	8.302	9.755	10.11	9.462	7.911	9.257	9.858	30- 40	13.05	354.2	97.8,51.2
50	3.425	3.123	3.326	3.284	3.264	2.834	3.111	3.252	40- 50	4.255	358.4	99,51.8
60	1.096	1.160	1.133	1.082	0.9880	0.8973	0.9774	1.034	50- 60	1.661	360.1	99.4,52
70	0.7762	0.8509	0.8496	0.8008	0.6762	0.6107	0.6792	0.7330	60- 70	0.8359	360.9	99.7,52.1
80	0.6642	0.7513	0.7702	0.3603	0.5600	0.4818	0.5511	0.6172	70- 80	0.7337	361.7	99.9,52.2
90	0	0	0	0	0	0	0	0	80- 90	0.4237	362.1	100,52.3
100	0	0	0	0	0	0	0	0	90-100	0	362.1	100,52.3
110	0	0	0	0	0	0	0	0	100-110	0	362.1	100,52.3
120	0	0	0	0	0	0	0	0	110-120	0	362.1	100,52.3
130	0	0	0	0	0	0	0	0	120-130	0	362.1	100,52.3
140	0	0	0	0	0	0	0	0	130-140	0	362.1	100,52.3
150	0	0	0	0	0	0	0	0	140-150	0	362.1	100,52.3
160	0	0	0	0	0	0	0	0	150-160	0	362.1	100,52.3
170	0	0	0	0	0	0	0	0	160-170	0	362.1	100,52.3
180	0	0	0	0	0	0	0	0	170-180	0	362.1	100,52.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz  
Lamp Flux:692.395x1 lm

NAME: OZ48-SBZ-40

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2501030017

MFR.: RISE

SUR.: 0.00113354m2

Shielding Angle:

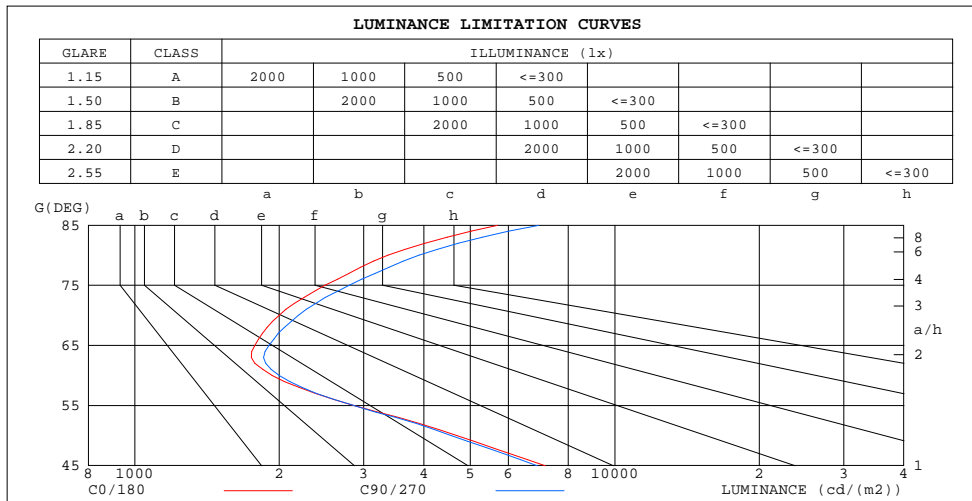

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	5694	6943
80	3371	3913
75	2490	2797
70	2000	2191
65	1778	1905
60	1933	1999
55	2861	2863
50	4696	4565
45	7158	6892

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz  
Lamp Flux:692.395x1 lm

NAME: OZ48-SBZ-40

TYPE:

WEIGHT:

SPEC.: 3000K

DIM.:


SERIAL No.: 2501030017

MFR.: RISE

SUR.: 0.00113354m2

Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	.62	.62	.62	.61	.61	.61	.58	.58	.58	.56	.56	.56	.53	.53	.53	.52
1.0	.59	.58	.57	.58	.57	.56	.55	.55	.54	.54	.53	.52	.52	.51	.51	.50
2.0	.56	.54	.52	.55	.53	.52	.53	.52	.51	.52	.51	.50	.50	.49	.49	.48
3.0	.53	.51	.49	.52	.50	.49	.51	.49	.48	.50	.48	.47	.49	.47	.47	.46
4.0	.50	.48	.46	.50	.48	.46	.49	.47	.46	.48	.46	.45	.47	.46	.45	.44
5.0	.48	.46	.44	.48	.46	.44	.47	.45	.44	.46	.45	.43	.45	.44	.43	.42
6.0	.46	.44	.42	.46	.44	.42	.45	.43	.42	.45	.43	.41	.44	.42	.41	.41
7.0	.45	.42	.40	.44	.42	.40	.44	.42	.40	.43	.41	.40	.42	.41	.40	.39
8.0	.43	.40	.39	.43	.40	.39	.42	.40	.39	.42	.40	.38	.41	.39	.38	.38
9.0	.41	.39	.37	.41	.39	.37	.41	.39	.37	.40	.38	.37	.40	.38	.37	.36
10.0	.40	.37	.36	.40	.37	.36	.39	.37	.36	.39	.37	.36	.39	.37	.36	.35

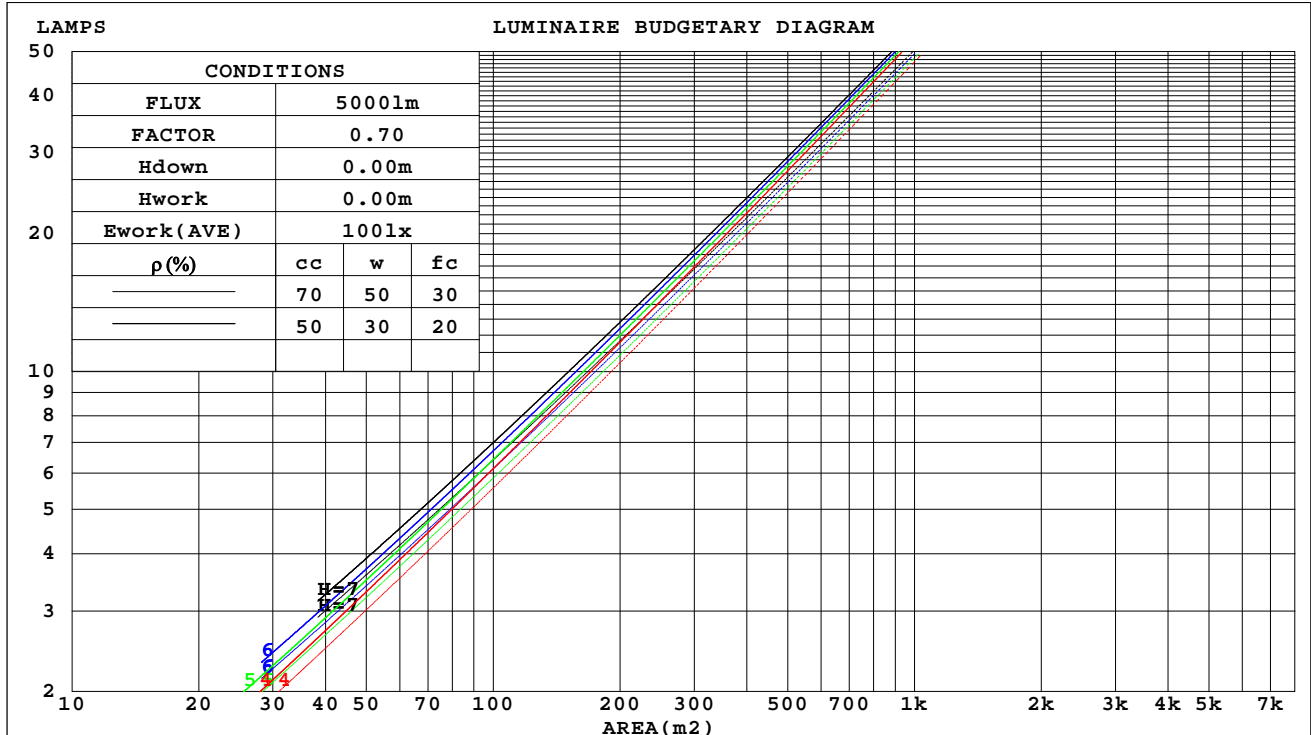

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

### WEC AND CCEC

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.078	.044	.014	.075	.043	.014	.068	.039	.012	.062	.036	.012	.057	.033	.011	
2.0	.073	.040	.012	.070	.039	.012	.065	.036	.011	.060	.033	.010	.055	.031	.010	
3.0	.068	.036	.011	.066	.035	.011	.061	.033	.010	.057	.031	.010	.053	.029	.009	
4.0	.064	.033	.010	.062	.033	.010	.058	.031	.009	.055	.029	.009	.051	.028	.009	
5.0	.061	.031	.009	.059	.030	.009	.056	.029	.009	.053	.028	.008	.050	.027	.008	
6.0	.058	.029	.008	.056	.028	.008	.053	.027	.008	.051	.026	.008	.048	.025	.008	
7.0	.055	.027	.008	.054	.027	.008	.051	.026	.007	.049	.025	.007	.047	.024	.007	
8.0	.053	.026	.007	.051	.025	.007	.049	.025	.007	.047	.024	.007	.045	.023	.007	
9.0	.050	.024	.007	.049	.024	.007	.047	.023	.007	.046	.023	.007	.044	.022	.006	
10.0	.048	.023	.006	.047	.023	.006	.046	.022	.006	.044	.022	.006	.042	.021	.006	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.100	.100	.100	.085	.085	.085	.058	.058	.058	.033	.033	.033	.011	.011	.011	
1.0	.088	.082	.077	.076	.071	.066	.052	.049	.046	.030	.028	.027	.010	.009	.009	
2.0	.079	.069	.061	.068	.060	.053	.047	.041	.037	.027	.024	.022	.009	.008	.007	
3.0	.072	.059	.049	.062	.051	.043	.042	.036	.030	.024	.021	.018	.008	.007	.006	
4.0	.066	.051	.040	.056	.044	.035	.039	.031	.025	.022	.018	.015	.007	.006	.005	
5.0	.060	.045	.034	.052	.039	.029	.036	.027	.021	.021	.016	.012	.007	.005	.004	
6.0	.056	.040	.028	.048	.035	.025	.033	.024	.017	.019	.014	.010	.006	.005	.003	
7.0	.052	.036	.024	.045	.031	.021	.031	.022	.015	.018	.013	.009	.006	.004	.003	
8.0	.049	.032	.021	.042	.028	.018	.029	.020	.013	.017	.012	.008	.005	.004	.003	
9.0	.046	.029	.018	.040	.025	.016	.028	.018	.011	.016	.011	.007	.005	.003	.002	
10.0	.044	.027	.016	.038	.023	.014	.026	.016	.010	.015	.010	.006	.005	.003	.002	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm										
NAME: OZ48-SBZ-40					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2501030017		
MFR.: RISE					SUR.: 0.00113354m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.0	10.7	10.2	10.9	11.0	10.2	11.0	10.4	11.1	11.3
3H	10.2	10.9	10.4	11.1	11.2	10.4	11.1	10.7	11.3	11.5
4H	10.4	11.1	10.7	11.3	11.5	10.7	11.4	11.0	11.6	11.8
6H	10.9	11.5	11.1	11.7	11.9	11.2	11.8	11.5	12.1	12.3
8H	11.2	11.8	11.5	12.0	12.3	11.6	12.2	11.9	12.4	12.7
12H	11.6	12.1	11.9	12.4	12.7	12.1	12.7	12.4	12.9	13.2
4H 2H	9.9	10.6	10.2	10.8	11.0	10.2	10.8	10.4	11.0	11.2
3H	10.3	10.9	10.6	11.1	11.4	10.5	11.1	10.8	11.4	11.6
4H	10.7	11.2	11.1	11.5	11.8	11.0	11.5	11.3	11.8	12.1
6H	11.4	11.9	11.8	12.2	12.5	11.8	12.2	12.1	12.6	12.9
8H	11.9	12.3	12.3	12.6	13.0	12.3	12.7	12.7	13.1	13.5
12H	12.5	12.9	12.9	13.3	13.6	13.1	13.5	13.5	13.8	14.2
8H 4H	10.9	11.4	11.3	11.7	12.1	11.2	11.6	11.6	12.0	12.3
6H	11.9	12.2	12.3	12.6	13.0	12.2	12.6	12.7	13.0	13.4
8H	12.6	12.9	13.0	13.3	13.7	13.0	13.3	13.4	13.7	14.1
12H	13.4	13.7	13.9	14.1	14.6	14.0	14.3	14.5	14.7	15.2
12H 4H	11.0	11.4	11.4	11.7	12.1	11.2	11.6	11.6	12.0	12.4
6H	12.1	12.4	12.5	12.8	13.2	12.4	12.7	12.8	13.1	13.5
8H	12.8	13.1	13.3	13.5	14.0	13.2	13.5	13.7	13.9	14.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 0.9					+ 1.0 / - 0.9				
1.5H	+ 2.1 / - 0.8					+ 2.0 / - 0.7				
2.0H	+ 1.5 / - 0.5					+ 1.2 / - 0.4				

CIE Pub.117, 692.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)  
Area: 0.00113354 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	47	44	42	47	44	42	47	44	42	40
0.80	51	48	46	51	48	46	50	48	46	44
1.00	53	50	48	52	50	48	52	50	48	46
1.25	55	52	51	54	52	50	53	51	50	48
1.50	56	54	52	55	53	52	54	53	51	49
2.00	57	55	54	57	55	53	55	54	52	50
2.50	58	56	55	57	56	54	56	54	53	50
3.00	59	57	56	58	56	55	56	55	54	51
4.00	60	58	57	59	58	57	57	56	55	52
5.00	60	59	58	59	58	58	57	57	56	52
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

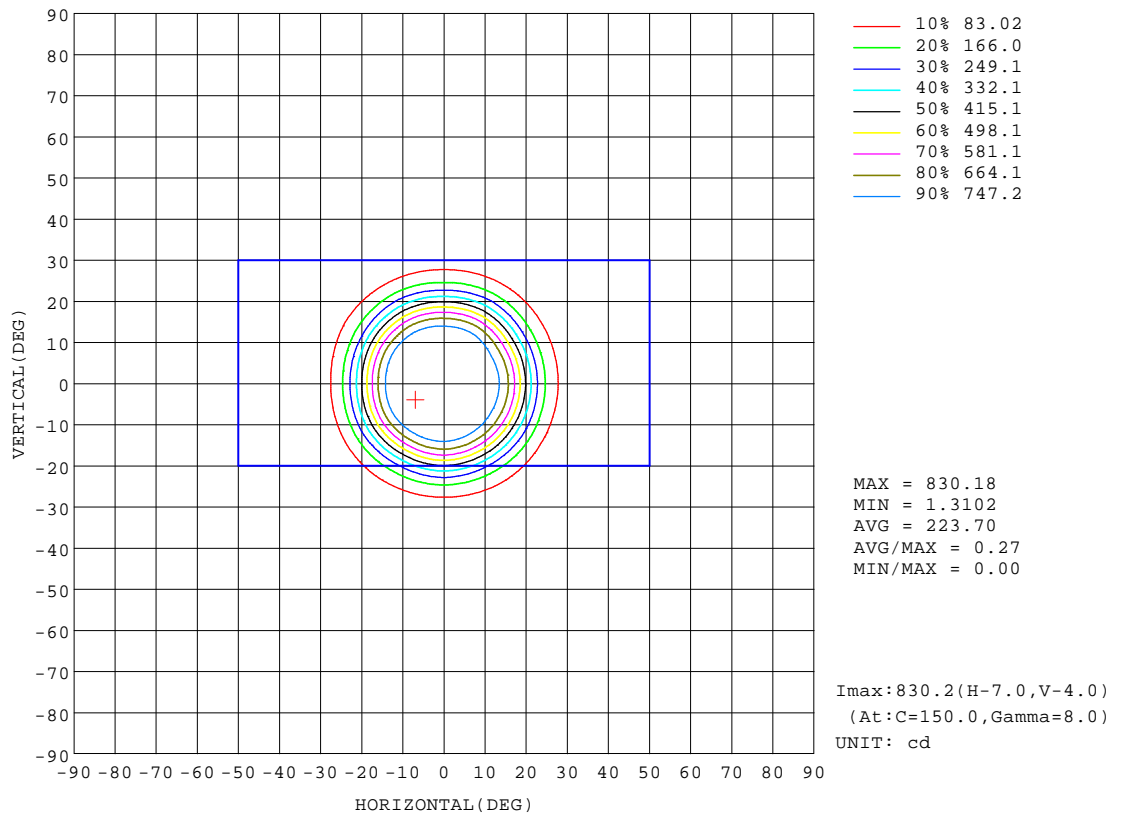


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## AAI Figure

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

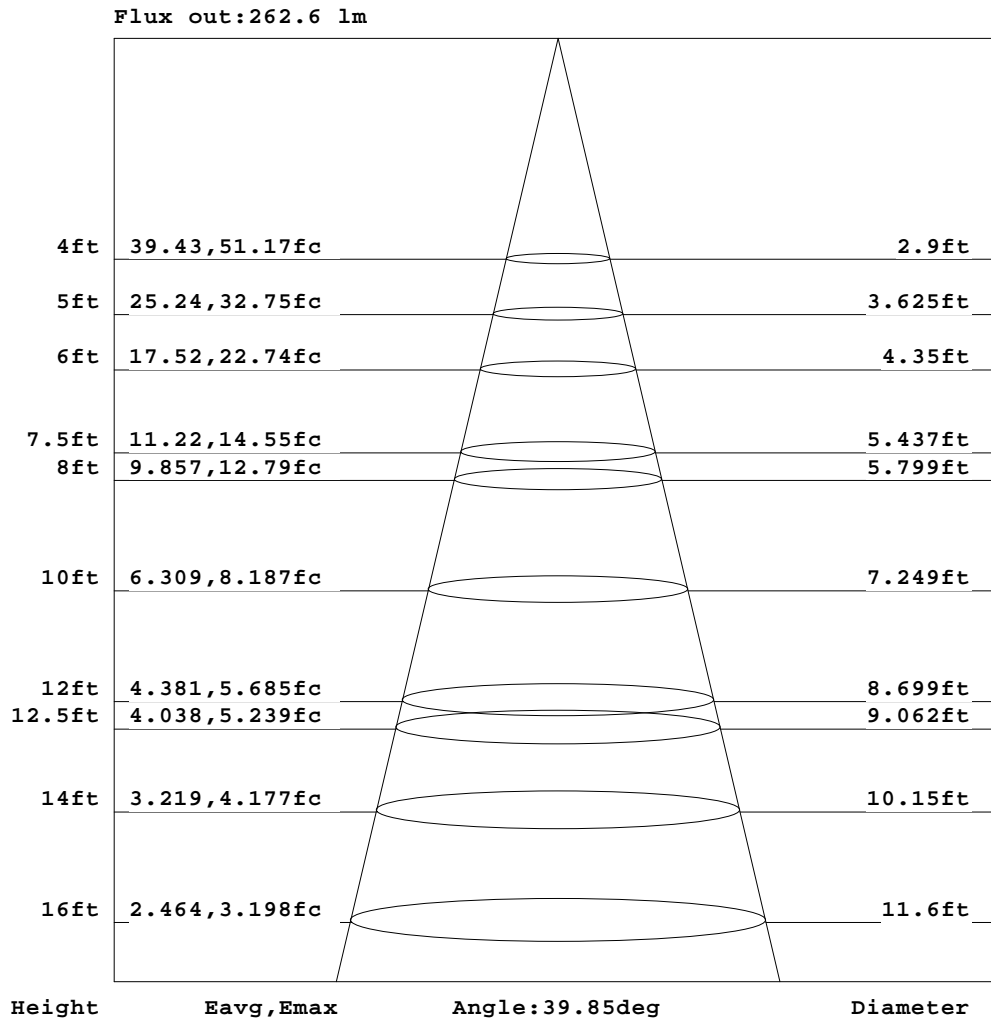


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97  
LENS: PM-0145 40R  
NOT DRIVER: 48V  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

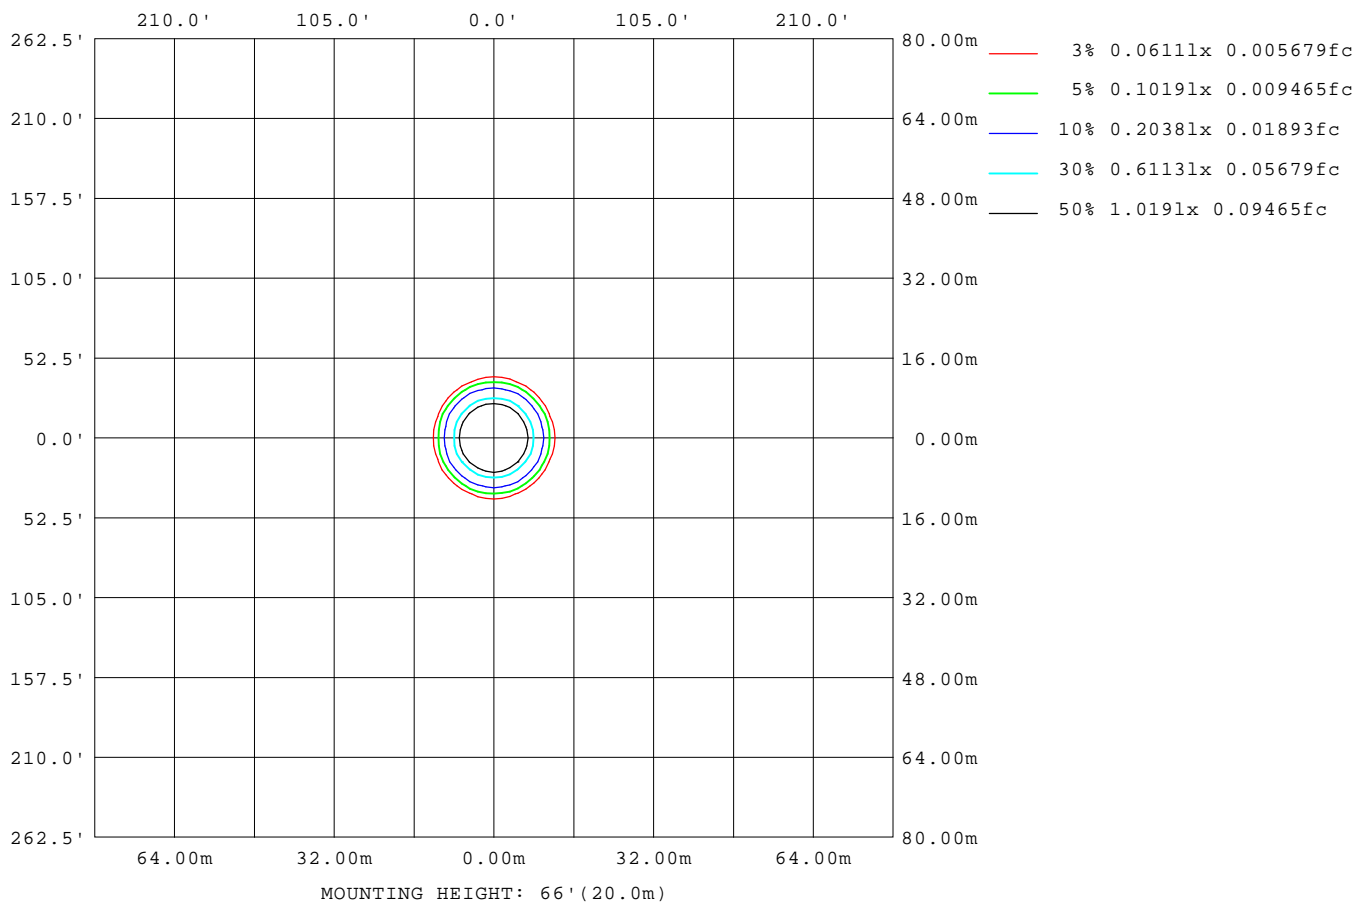

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## LED Avg.L Report

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1678
L_0~180(75)av	2317
L_0~180(85)av	4979
L_90~270(65)av	1746
L_90~270(75)av	2471
L_90~270(85)av	5667
L_45(65)av	1722
L_45(75)av	2413
L_45(85)av	5349

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up

## Planar Illuminance Curve

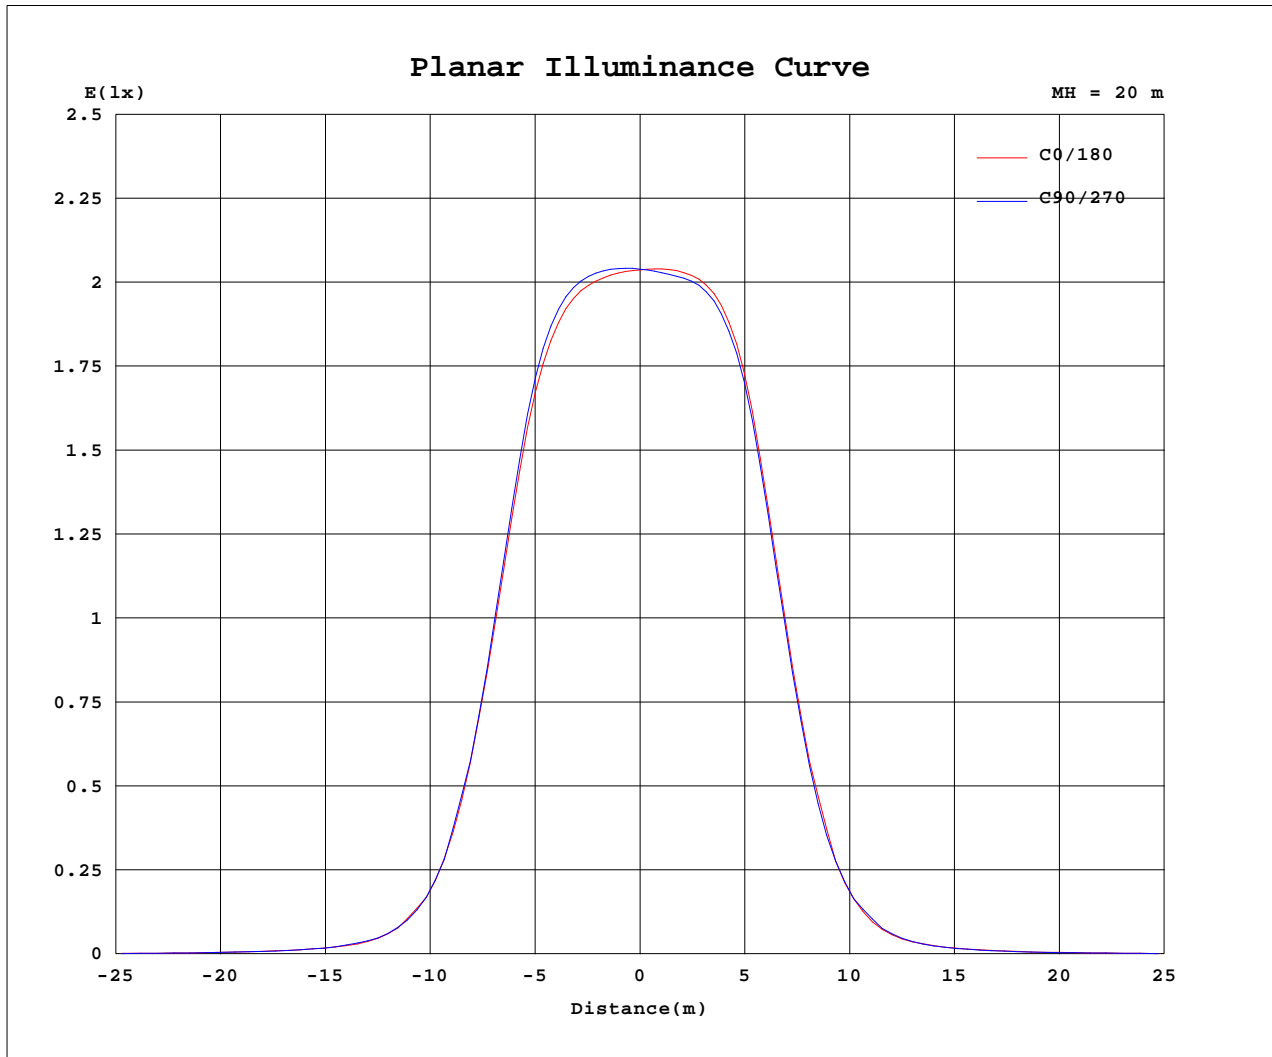

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-1-4

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRH-30H0600-A-83 Ra: 97  
 LENS: PM-0145 40R  
 NOT DRIVER: 48V  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:47.997V I:0.1705A P:8.1835W PF:1.0000 Freq:49.99Hz Lamp Flux:692.395x1 lm		
NAME: OZ48-SBZ-40	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2501030017
MFR.: RISE	SUR.: 0.00113354m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	816	816	816	816	816	816	816	816	816	816	816	816						
5	816	817	820	823	826	826	824	820	818	817	814	813						
10	806	807	813	820	823	826	824	824	819	815	810	801						
15	696	693	699	713	709	722	717	726	723	705	710	688						
20	407	399	398	413	404	424	413	428	426	404	417	397						
25	153	148	147	152	148	156	149	160	159	149	157	149						
30	47.8	48.1	46.7	49.1	47.9	48.9	45.6	49.4	50.1	47.2	49.7	47.4						
35	18.2	17.7	17.5	19.7	18.5	19.8	18.5	16.1	18.2	18.0	19.8	18.5						
40	9.97	7.78	8.83	9.76	9.71	10.5	9.46	7.41	8.41	9.26	9.66	10.1						
45	5.74	4.57	5.11	5.52	5.30	5.92	5.46	4.43	4.90	5.18	5.33	5.68						
50	3.43	3.00	3.25	3.33	3.16	3.41	3.26	2.69	2.98	3.11	3.12	3.38						
55	1.86	1.82	1.90	1.86	1.75	1.80	1.72	1.43	1.56	1.65	1.65	1.81						
60	1.10	1.16	1.16	1.13	1.10	1.06	0.99	0.87	0.92	0.98	1.00	1.07						
65	0.85	0.92	0.93	0.91	0.91	0.83	0.75	0.68	0.71	0.76	0.78	0.83						
70	0.78	0.84	0.86	0.85	0.84	0.76	0.68	0.60	0.62	0.68	0.71	0.75						
75	0.73	0.80	0.83	0.82	0.81	0.72	0.63	0.55	0.57	0.63	0.67	0.71						
80	0.66	0.74	0.77	0.77	0.06	0.66	0.56	0.47	0.49	0.55	0.59	0.64						
85	0.56	0.64	0.68	0.69	0.66	0.55	0.42	0.33	0.35	0.43	0.48	0.53						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-1-4

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRH-30H0600-A-83 Ra:97  
LENS:PM-0145 40R  
NOT DRIVER:48V  
30minutes warm-up