




BRANKO-A-85C-STF



Product specification

INTERIOR RECESSED DOWNLIGHTS



Cut out :
3⁵/₃₂" X 3⁵/₃₂"

Technical Specification

Article number	2418.103-LEA-14	
LED Consumption	16W (NON-IC)	14W (IC)
Fixture Consumption	20W	15W
Current / Voltage	450mA / 33.7Vdc	350mA / 32.9Vdc
CRI	90+	90+
CCT	3000K	3000K
LED Lumen ^{*1}	1825lm	1454lm
Delivered Lumen	1181lm	950lm
Beam Angle available	25°/30°/45°/55° (Lens)	

Driver Technical Specification

Driver Brand	EUCHIPS	Driver Model	PUP20A-1WMC
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	450mA / 9-44Vdc
Dimming / Flicker	0/1-10V / Flicker-free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character

Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Wet Location	Heat sink	Forged aluminum
Tilt / Rotate	None / None	Fixture color available	white / black
Operating temperature	0~35°C		
Average Failure Time	L70(10k) >55000(h)		

Accessories

Photometric



ACHO-5
Honeycomb louver

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS



ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
 for BRANKO85-2.8"
 BRANKO110-3.5" (18-21W)
 Type: Gear box


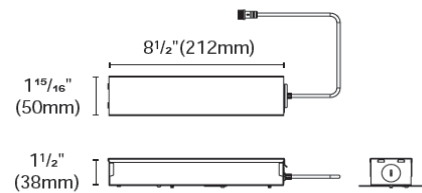


Internal space dimension:
 L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)




ACCH-12-80 for BRANKO85-2.8"
 Type: New construction plate

Cut out:
 Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)
 Square : $\square 3^{5/32}$ " ($\square 80$ mm)
 Also for Millwork

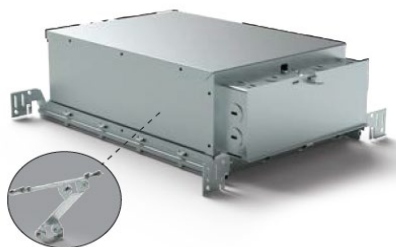


ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC
 for BRANKO85-2.8"
 Type: IC Box
Cut out:
 Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)
 Square : $\square 3^{5/32}$ " ($\square 80$ mm)
 Also for Millwork

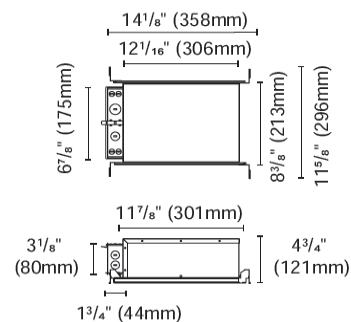

Driver is secured on patent designed bracket



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

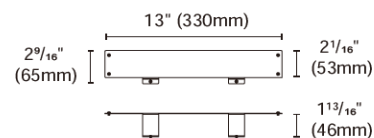

ACCI-5
 Type: Remodel stand

