




BROWNIE 60-K5

Product specification

SYSTEM LIGHTS

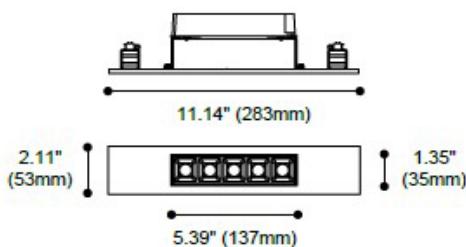

Technical Specification

Article number 2117.427-5-V-AM

LED Consumption 13W

Fixture Consumption

Current / Voltage 700mA / 15Vdc

CRI 90+

CCT 3000K

LED Lumen *1 820lm

Delivered Lumen

Beam Angle available 20°/30°/40°

Driver Technical Specification (Remoted)

Driver Brand EUCHIPS Driver Model PUP20A-1WMC

Input voltage / Freqency range 120-277Vac / 50/60Hz Output Current / Voltage 700mA / 9-28Vdc

Dimming / Flicker 0/1~10V/Free Certification UL/CE

Power Factor >0.9 Warranty 5years

Technical character

Materials

Products Standard	UL 1598	Luminaire	extruded aluminum
	CSA C22.2#250.0	Trim	-
Insulation	CLASS II	Optics	
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate		Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / piano black

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.