




STELLAR-85-RTA1



Product specification

INTERIOR RECESSED DOWNLIGHTS

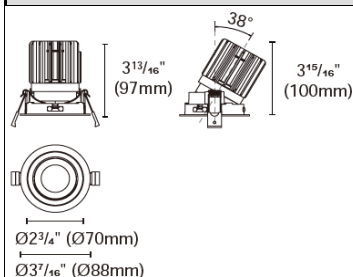

Cut out :

Technical Specification

Article number	2218.143-LEA-14	
LED Consumption	16W (NON-IC)	14W (IC)
Fixture Consumption	20W	18W
Current / Voltage	450mA / 33.7Vdc	400mA / 33.3Vdc
CRI	90+	90+
CCT	3000K	3000K
LED Lumen ^{*1}	1825lm	1642lm
Delivered Lumen	1405lm	1270lm
Beam Angle available	30°/35°/50°/60° (Lens)	

Driver Technical Specification


Driver Brand	EUCHIPS	Driver Model	PUP20A-1WMC
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	450mA / 9-44Vdc
Dimming / Flicker	0/1-10V / Flicker-free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0~38° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(10k) >55000(h)	Baffle Color available	white / black

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass

Photometric



h(m)	D(m)	E(lx)
50°		
1.0	0.90	2200
2.0	1.80	549
3.0	2.70	244
4.0	3.60	137
5.0	4.50	87


450mA

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.


INSTALLATION OPTIONS





ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
 for STELLAR85-2.8" (18-20W)
 Type: Gear box

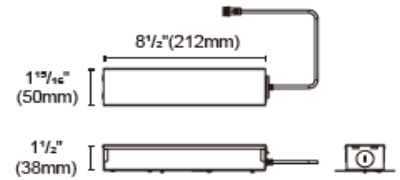


Internal space dimension:
 L 8¹/₄" (209mm) X W 1⁷/₈" (48mm) X H 1⁵/₁₆" (33mm)

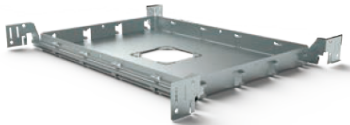

ACCH-12-80 for STELLAR85-2.8"
 Type: New construction plate

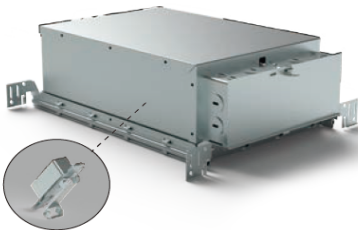


ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC
 for STELLAR85-2.8" (20W)
 Type: IC Box



Driver is secured on patent designed bracket



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

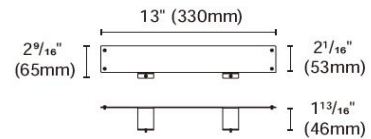

ACCI-5
 Type: Remodel stand

