

# IVA SERIES (EU)



# IVA (EU)


## Focusing on Every Detail

In the field of store design, lighting plays a crucial role—not only in terms of energy efficiency, sustainability, and flexible integration, but also in optimizing the visual appeal of different products and the overall spatial atmosphere. Its impact can be realized immediately in the retail environment.

By choosing innovative fixtures and technologies, such as high-efficiency LEDs and advanced optical designs, energy consumption can be reduced while professional planning helps lower long-term operational costs and effectively showcase the beauty of the products.

Furthermore, replaceable modules minimize resource waste and maintenance costs, delivering significant benefits in modern lighting solutions.



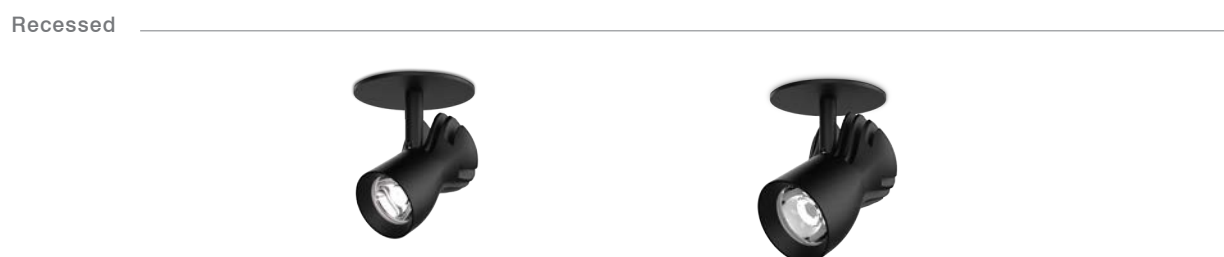

Recessed downlights

85  
Downlights

110  
Downlights

Round

---

Trim



Trimless



Multiple lights

---

For details, please refer to the ESB series in the catalog.

1 Lamp  
Trim



1 Lamp  
Trimless



2 Lamp  
Trim



2 Lamp  
Trimless



3 Lamp  
Trim



3 Lamp  
Trimless







# IVA

Offers a wide range of accessories to choose from.

Design of various functional accessories




## Function Introduction

**Snoot** Enhances the luminaire's cut-off angle.

**Honeycomb louver** Reduces glare, lowers brightness, and enhances lighting comfort.

**Oval Filter** Converts a circular beam into an elliptical one, tailoring it to your lighting needs.  
It's particularly suitable for long or custom-shaped lighting areas

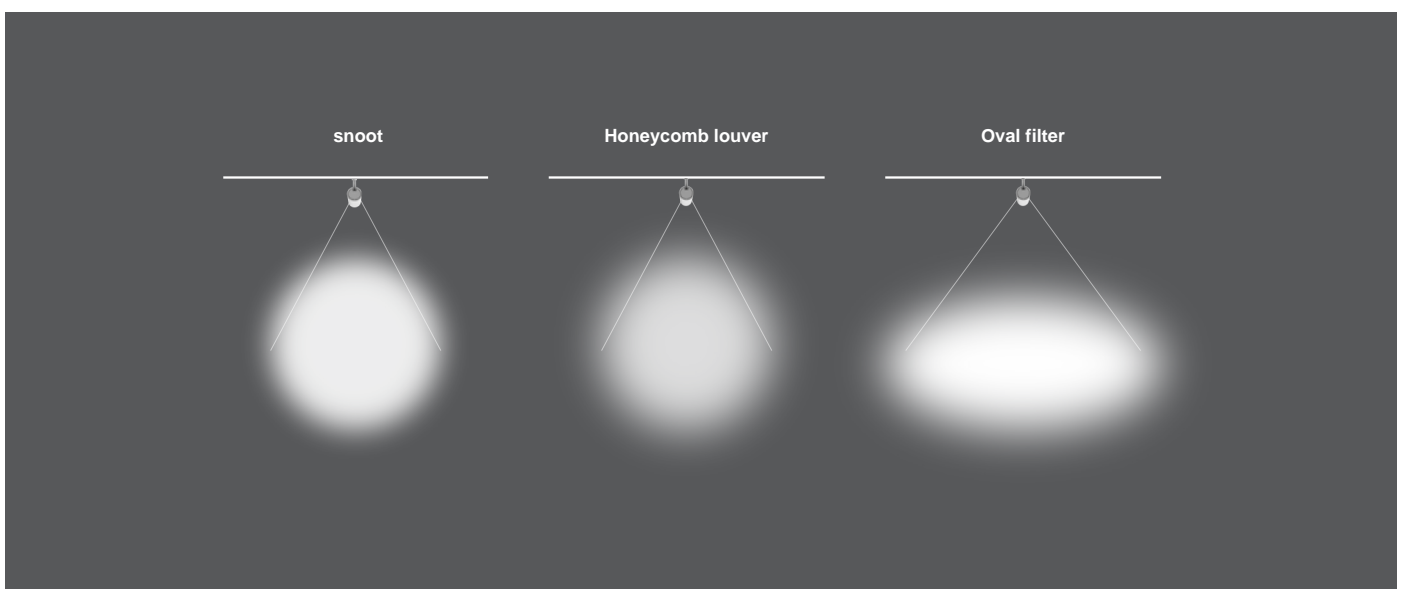





# IVA 50/64

Spotlight





### Colours

Body : Black  White

Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2519.217-UA-350-HE	12W / 14W	350 mA	1458 lm / 1245 lm	17°/30°/50° (Lens)	3000K	90+

### Dimmable



### Optional Accessory



S-019 Snoot

H-014 Honeycomb louver



SG-018 Oval PC

### IES

**17°** 1206 lm

Spotlight

2519.217-UA-350-HE





H(m)	D(m)	E(lx)
<b>17°</b>		
1.0	0.31	6912
2.0	0.61	1728
3.0	0.92	768
4.0	1.23	432
5.0	1.53	276

**30°** 1245 lm

Spotlight

2519.217-UA-350-HE





H(m)	D(m)	E(lx)
<b>35°</b>		
1.0	0.61	2717
2.0	1.21	679
3.0	1.82	301
4.0	2.42	169
5.0	3.02	108


**50°** 1103 lm

Spotlight

2519.217-UA-350-HE



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.94	943
2.0	1.87	235
3.0	2.81	104
4.0	3.75	58
5.0	4.69	37

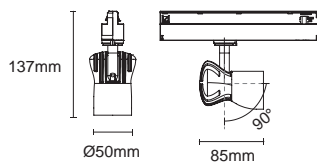



### Colours

- Body : Black  White   
 Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2519.218-UA-500-HE	18W / 19W	500 mA	2504 lm / 2189 lm	18°/24°/40°/55° (Lens)	3000K	90+

### Dimmable





### Optional Accessory



S-001 Snoot  
 H-001 Honeycomb louver  
 SG-019 Oval PC



### IES

**18°** 2063 lm  
 Spotlight  
 2519.218-UA-500-HE





H(m)	D(m)	E(lx)
<b>18°</b>		
1.0	0.33	10217
2.0	0.65	2554
3.0	0.98	1135
4.0	1.31	638
5.0	1.63	408

**24°** 2189 lm  
 Spotlight  
 2519.218-UA-500-HE





H(m)	D(m)	E(lx)
<b>24°</b>		
1.0	0.44	7584
2.0	1.87	1896
3.0	1.31	842
4.0	1.75	474
5.0	2.18	303

**40°** 2178 lm  
 Spotlight  
 2519.218-UA-500-HE




H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.71	3546
2.0	1.43	886
3.0	2.14	394
4.0	2.85	221
5.0	3.57	141

**55°** 2085 lm  
 Spotlight  
 2519.218-UA-500-HE



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	1.02	1770
2.0	2.03	442
3.0	3.05	196
4.0	4.07	110
5.0	5.08	70

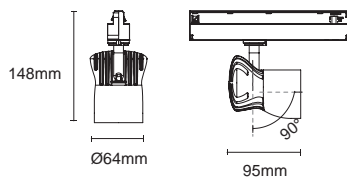

# IVA 50 Recessed spotlight

IVA-50-RTA



## Colours

Body: Black  White

Baffle: Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2518.117-HE	12W / 14W	350 mA	1458 lm / 1245 lm	17°/30°/50° (Lens)	3000K	90+

## Dimmable



## Optional Accessory



S-019  
Snoot




H-014  
Honeycomb louver





SG-018  
Oval PC

## IES

 **17°** 1206 lm

Spotlight

2518.117-HE




H(m)	D(m)	E(lx)
<b>17°</b>		
1.0	0.31	6912
2.0	0.61	1728
3.0	0.92	768
4.0	1.23	432
5.0	1.53	276

 **30°** 1245 lm

Spotlight

2518.117-HE





H(m)	D(m)	E(lx)
<b>35°</b>		
1.0	0.61	2717
2.0	1.21	679
3.0	1.82	301
4.0	2.42	169
5.0	3.02	108


 **50°** 1103 lm


Spotlight

2518.117-HE



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.94	943
2.0	1.87	235
3.0	2.81	104
4.0	3.75	58
5.0	4.69	37

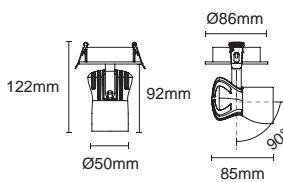

 Cut out :75mm

# IVA 64 Recessed spotlight

IVA-64-RTA



## Colours

Body : Black  White

Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2518.118-HE	18W / 19W	500 mA	2504 lm / 2189 lm	18°/24°/40°/55° (Lens)	3000K	90+

## Dimmable



## Optional Accessory



S-001  
Snoot



H-001  
Honeycomb louver





SG-019  
Oval PC

## IES

**18°** 2063 lm

### Spotlight

2518.118-HE




H(m)	D(m)	E(lx)
<b>18°</b>		
1.0	0.33	10217
2.0	0.65	2554
3.0	0.98	1135
4.0	1.31	638
5.0	1.63	408

**24°** 2189 lm

### Spotlight

2518.118-HE





H(m)	D(m)	E(lx)
<b>24°</b>		
1.0	0.44	7584
2.0	1.87	1896
3.0	1.31	842
4.0	1.75	474
5.0	2.18	303

**40°** 2178 lm

### Spotlight

2518.118-HE





H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.71	3546
2.0	1.43	886
3.0	2.14	394
4.0	2.85	221
5.0	3.57	141


**55°** 2085 lm

### Spotlight

2518.118-HE



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	1.02	1770
2.0	2.03	442
3.0	3.05	196
4.0	4.07	110
5.0	5.08	70

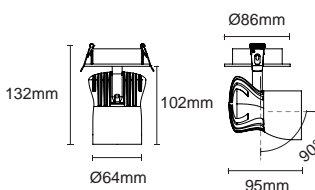

Cut out : 75mm

# IVA 50 Surface mounted spotlight

IVA-50-RSF



## Colours

Body: Black  White

Baffle: Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2513.125-HE	12W / 14W	350 mA	1458 lm / 1245 lm	17°/30°/50° (Lens)	3000K	90+

## Dimmable



## Optional Accessory



S-019  
Snoot




H-014  
Honeycomb louver





SG-018  
Oval PC

## IES



### Spotlight

2519.317-HE





H(m)	D(m)	E(lx)
<b>17°</b>		
1.0	0.31	6912
2.0	0.61	1728
3.0	0.92	768
4.0	1.23	432
5.0	1.53	276



### Spotlight

2519.317-HE




H(m)	D(m)	E(lx)
<b>35°</b>		
1.0	0.61	2717
2.0	1.21	679
3.0	1.82	301
4.0	2.42	169
5.0	3.02	108




### Spotlight

2519.317-HE



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.94	943
2.0	1.87	235
3.0	2.81	104
4.0	3.75	58
5.0	4.69	37

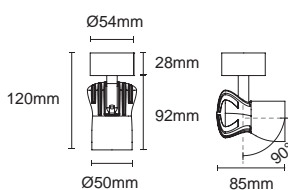

Cut out :23x38mm  
( Place driver)

# IVA 64 Surface mounted spotlight

IVA-64-RSF



## Colours

Body : Black  White

Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
2513.126-HE	18W / 19W	500 mA	2504 lm / 2189 lm	18°/24°/40°/55° (Lens)	3000K	90+

## Dimmable



## Optional Accessory



S-001  
Snoot



H-001  
Honeycomb louver





SG-019  
Oval PC

## IES

**18°** 2063 lm

### Spotlight

2519.318-HE




H(m)	D(m)	E(lx)
<b>18°</b>		
1.0	0.33	10217
2.0	0.65	2554
3.0	0.98	1135
4.0	1.31	638
5.0	1.63	408

**24°** 2189 lm

### Spotlight

2519.318-HE





H(m)	D(m)	E(lx)
<b>24°</b>		
1.0	0.44	7584
2.0	1.87	1896
3.0	1.31	842
4.0	1.75	474
5.0	2.18	303

**40°** 2178 lm

### Spotlight

2519.318-HE





H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.71	3546
2.0	1.43	886
3.0	2.14	394
4.0	2.85	221
5.0	3.57	141


**55°** 2085 lm

### Spotlight

2519.318-HE



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	1.02	1770
2.0	2.03	442
3.0	3.05	196
4.0	4.07	110
5.0	5.08	70

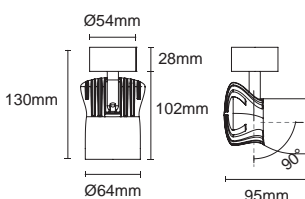

Cut out :23x38mm  
( Place driver)





# IVA 85/110

Recessed downlights



# IVA 85 Recessed downlight

IVA-85-RTA / IVA-85-RTLA



## Colours

Bezel : Black  White

Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
<b>Trim</b>						
2518.119-HE	12W / 14W	350 mA	1458 lm / 1245 lm	17°/30°/50° (Lens)	3000K	90+
<b>Trimless</b>						
2518.219-HE	12W / 14W	350 mA	1458 lm / 1245 lm	17°/30°/50° (Lens)	3000K	90+

## Dimmable



## Optional Accessory




S-019  
Snoot


H-014  
Honeycomb louver

SG-018  
Oval PC

## IES

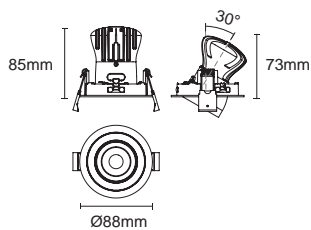

⊖ Cut out : 80mm (Trim)


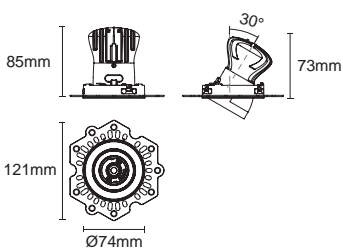


⊖ Cut out : 80mm (Trimless)

**17°** 1206 lm

### Adjustable

2518.119-HE  
2518.219-HE





H(m)	D(m)	E(lx)
<b>17°</b>		
1.0	0.31	6912
2.0	0.61	1728
3.0	0.92	768
4.0	1.23	432
5.0	1.53	276

**30°** 1245 lm

### Adjustable

2518.119-HE  
2518.219-HE





H(m)	D(m)	E(lx)
<b>35°</b>		
1.0	0.61	2717
2.0	1.21	679
3.0	1.82	301
4.0	2.42	169
5.0	3.02	108

**50°** 1103 lm

### Adjustable

2518.119-HE  
2518.219-HE



H(m)	D(m)	E(lx)
<b>50°</b>		
1.0	0.94	943
2.0	1.87	235
3.0	2.81	104
4.0	3.75	58
5.0	4.69	37

# IVA 110 Recessed downlight

IVA-110-RTA / IVA-110-RTLA



## Colours

Bezel : Black  White

Baffle : Black  White

Article number	LED / Fixture Consumption	Current	LED / Delivered Lumen	Beam Angle	CCT	CRI
<b>Trim</b>						
2518.120-HE	18W / 19W	500 mA	2504 lm / 2189 lm	18°/24°/40°/55° (Lens)	3000K	90+
<b>Trimless</b>						
2518.220-HE	18W / 19W	500 mA	2504 lm / 2189 lm	18°/24°/40°/55° (Lens)	3000K	90+

## Dimmable



## Optional Accessory



S-001  
Snoot

H-001  
Honeycomb louver



SG-019  
Oval PC

## IES

**18°** 2063 lm

### Adjustable

2518.120-HE  
2518.220-HE





H(m)	D(m)	E(lx)
<b>18°</b>		
1.0	0.33	10217
2.0	0.65	2554
3.0	0.98	1135
4.0	1.31	638
5.0	1.63	408

**24°** 2189 lm

### Adjustable

2518.120-HE  
2518.220-HE





H(m)	D(m)	E(lx)
<b>24°</b>		
1.0	0.44	7584
2.0	1.87	1896
3.0	1.31	842
4.0	1.75	474
5.0	2.18	303

**40°** 2178 lm

### Adjustable

2518.120-HE  
2518.220-HE





H(m)	D(m)	E(lx)
<b>40°</b>		
1.0	0.71	3546
2.0	1.43	886
3.0	2.14	394
4.0	2.85	221
5.0	3.57	141


**55°** 2085 lm

### Adjustable


2518.120-HE  
2518.220-HE



H(m)	D(m)	E(lx)
<b>55°</b>		
1.0	1.02	1770
2.0	2.03	442
3.0	3.05	196
4.0	4.07	110
5.0	5.08	70

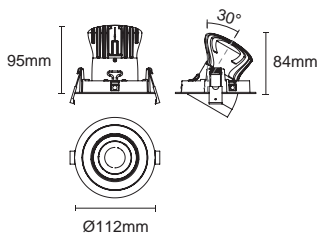

⊖ Cut out : 100mm (Trim)

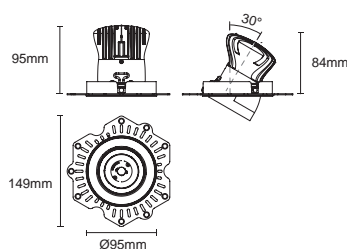

⊖ Cut out : 100mm (Trimless)