



## ENYO

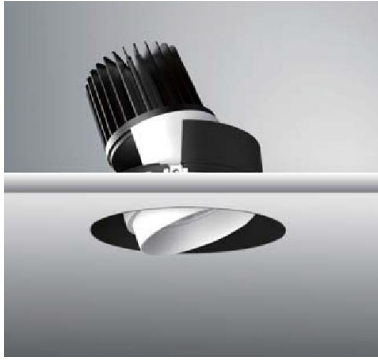

## Product specification

**INTERIOR RECESSED DOWN LIGHT**

<b>Installation</b>	Ceiling recessed
<b>Cut out</b>	Ø153
<b>Dimension</b>	D=Ø168 x H= 162mm

**Technical description**

<b>Article number</b>	1618.242		
<b>LED Consumption</b>	39.1W		
<b>Current</b>	1050mA		
<b>CCT</b>	2700K	3000K	4000K
<b>Lumen *1</b>	3903lm	4058lm	4121lm
<b>Øsystem*3</b>	-	-	-
<b>Voltage</b>	37.3V		
<b>Reflector</b>	15°/24°/38°/60°		
<b>CRI</b>	90+		
<b>Driver</b>	Remoted, I/P : 90-264V 50/60HZ O/P : 9-48V 1050mA 60w Max		

**Technical character**

<b>Insulation</b>	CLASS II
<b>Protection</b>	IP 20
<b>Tilt</b>	0~20°
<b>Rotate</b>	0~355°
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(10k) >60000 (h)

**Materials**

<b>Luminaire</b>	aluminum die cast
<b>Baffle</b>	plastic-PC
<b>Reflector</b>	plastic-PC
<b>Heat sink</b>	forged aluminum
<b>Color available: Body/Bezel</b>	Black/White
<b>Color available: Baffle</b>	Black/White/Chrome/Piano black

**Package**

<b>inner box</b>	-	mm	1 kg
<b>outer box</b>	-	mm	0 kg / 0 in 1

**Photometric****Accessories**SG10-2  
wave glassH13-2  
honeycomb louver**Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

