
# **BRISE**

# **TEYVAT**



# **Product specification**

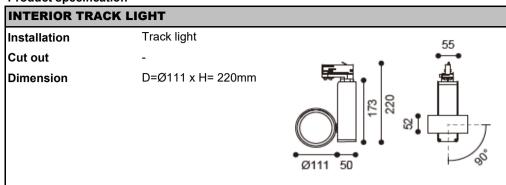

Technical description				
Article number	1819.234			
LED Consumption	24.8W			
Current	700mA			
ССТ	2700K	3000K	4000K	
Lumen <sup>*1</sup>	2763lm	2873lm	2918lm	
Øsystem <sup>*3</sup>	-	-	-	
Voltage	35.5V			
Reflector	15°/20°/35°			
CRI	90+			
Driver	Built-in, I/P :			
	O/P: 700mA			

Technical character		
Insulation	CLASS II	
Protection	IP 20	
Tilt	0~90°	
Rotate	0~355°	
Operating temperature	-25~45 °C	
Average Failure Time	L70(10k) >60000 (h)	

Materials		
Luminaire	extruded aluminum	
Luillilaire		
Reflector	plastic-PC	
Heat sink	aluminum die cast	
Gear box	ADC12	
Color available	white / black / double	

#### **Package**

mm 1 kg inner box outer box mm 0 kg / 0 in 1


striped glass , honeycomb louver , Snoot


### **Accessories**

## Remarks



- \*1. LUMEN : for LED chip test result based on Tc=85°C.
  - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- \*3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.





**Photometric**