




BROWNIE 60-K10



## Product specification

## SYSTEM LIGHTS

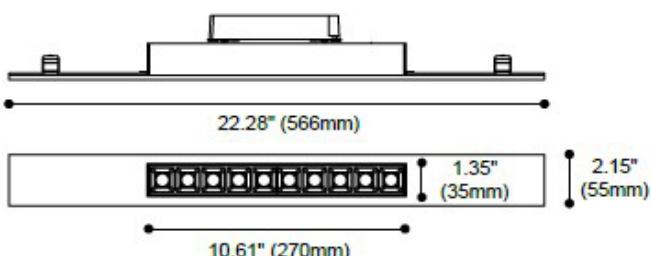

## Technical Specification

Article number 2117.427-5-V-AM

LED Consumption 22W

Fixture Consumption

Current / Voltage 700mA /30Vdc

CRI 90+

CCT 3000K

LED Lumen \*1 1599lm

Delivered Lumen

Beam Angle available 20°/30°/40°

## Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS30W-42-C0700-RD
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	700mA / 21-42Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

## Technical character

## Materials

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate		Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / piano black

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.