




## BROWNIE 60-S1



## Product specification

## SYSTEM LIGHTS

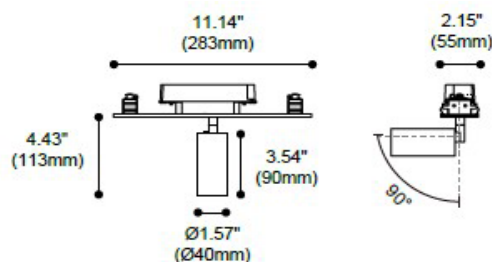

## Technical Specification

Article number	2117.436-V-AM		
LED Consumption	10W		
Fixture Consumption			
Current / Voltage	350mA /18Vdc		
CRI	90+		
CCT	3000K		
LED Lumen <sup>*1</sup>	567lm		
Delivered Lumen			
Beam Angle available	20°/25°/36°		
Driver Technical Specification (Remoted)			
Driver Brand	EUCHIPS	Driver Model	PUP10A-1WMC
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	350mA / 9-28Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	UL 1598	Luminaire	extruded aluminum
	CSA C22.2#250.0	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / copper

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.